

AVQ200-36 Series

200 Watts

Data Sheet

Total Power: 200 Watts
Input Voltage: 18 - 75 V
of Outputs: Single

SPECIAL FEATURES

- 2:1 Wide input range
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- High efficiency
- High capacitive load capability
- Basic insulation system
- Openframe structure with baseplate option

SAFETY

- IEC/EN/UL/CSA 60950
- CE Mark
- UL/TUV



Electrical Specifications

Input	
Input range	18 - 36 VDC
Efficiency	93% @ 5 Vo
Output	
Voltage tolerance	±1%
Line regulation	0.2%
Load regulation	0.2%
Noise/ripple	140 mV Max
Overvoltage protection	Hiccup
Overtemperature protection	Auto-restart
Switching frequency	310 KHz
Temperature co-efficient	±0.02 / °C
Isolation	
I/O isolation	1500 VDC min.

Environmental Specifications

Operating ambient temperature range	-40 °C to +85 °C
Storage temperature	-55 °C to +125 °C
Humidity	5% to 95% (non-condensing)
MTBF	2.5 Million hours
RoHS compliant	

Ordering Information

Model number	Input voltage	Output voltage	Power
AVQ200-36S12-6L	18 - 75 Vin		
AVQ200-36S12B-6L	18 - 75 Vin		

- Standard version is negative enable
- “-6” = 3.8 mm pin length
- “-4” = 4.8 mm pin length
- “-L” = RoHS 6 compliance
- “-P” = Positive enable
- “-B” = Baseplate
- “-T” = Non-thread hole


Pin Assignments

Pin #	Pin Name	Function
1	Vin+	Positive input voltage
2	Remote ON/OFF	Remote control
3	Vin-	Negative input voltage
4	Vo-	Negative output voltage
5	S-	Negative remote sense
6	Trim	Output voltage trim
7	S+	Positive remote sense
8	Vo+	Positive output voltage

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

Mechanical Drawings - Open Frame Module

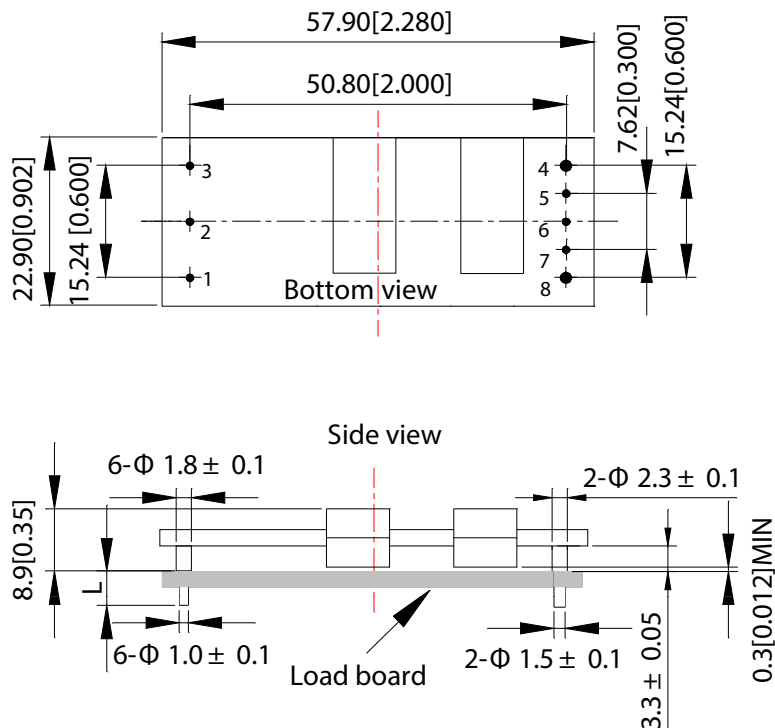


Unit: mm[inch]

Bottom view: pin on upside

Tolerance: X.Xmm ± 0.4mm[X.X in. ± 0.02in.]

X.XXmm ± 0.25mm[X.XX in. ± 0.01in.]

Mechanical Drawings - Baseplate Module

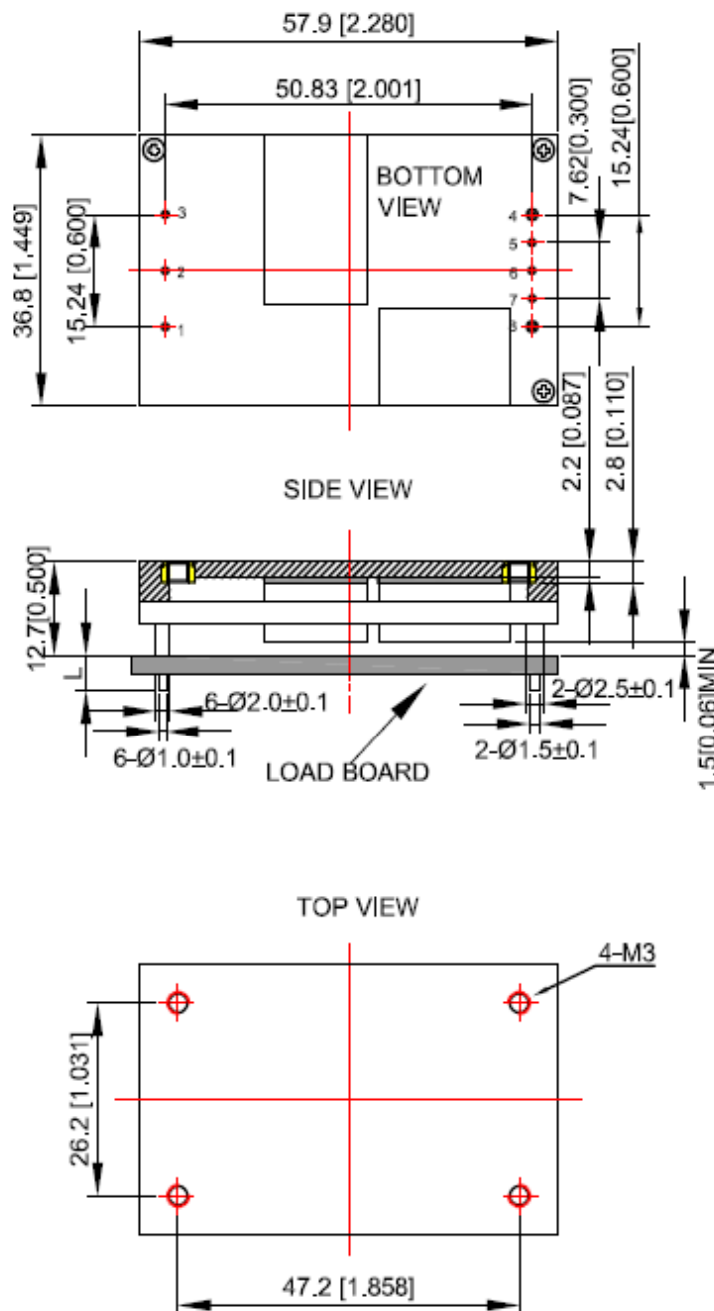

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barbary House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN
An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com

AVQ200-36 Series DS 29Nov2019