



DATASHEET Part No. 1001435 Product: Wi-Fi Dual Band Stamp Metal Embedded Antenna

# Part No. 1001435 Wi-Fi Dual Band On Ground / Off Ground Stamp Metal Antenna

2.4 / 5 GHz

Supports: Wi-Fi applications, Agriculture, Automotive, Bluetooth, Zigbee, WLAN, Smart Home, Healthcare, Digital Signage



Ethertronics' antennas deliver on the key needs of device designers for higher functionality and performance in smaller/thinner designs. These innovative antennas provide compelling advantages for a 2.4 GHz and 5 GHz enabled handheld devices, media players and other mobile devices. Ethertronics' antennas requires a smaller design keep-out area and yields a guicker time-to-market without sacrificing RF performance."

#### **Greater Flexibility**

Ethertronics' first-in-class technology enables you to develop concept designs that are more advanced and that deliver superior performance in reception critical applications.

## **Electrical Specifications**

Typical Characteristics Free-space/ On Ground 150 x 150 mm PCB

	Frequency	2400 – 2485 MHz		5150 – 5825 MHz		
	Mounting	Off Ground	On Ground (Over Metal)	Off Ground	On Ground (Over Metal)	
	Peak Gain	4.2 dBi	4.7 dBi	6.4 dBi	6.0 dBi	
У	Average Efficiency	82%	87%	80 %	75 %	
	VSWR Match	2:1 max				
	Feed Point Impedance					
	Polarization	Linear				
	Power Handling	0.5 Watt CW				

## Mechanical Specifications & Ordering Part Number

Ordering Part Number	1001435		
Size (mm)	41.1 x 14.6 x 9.5		
Weight (grams)	1.55		
Cable/Connector (mm)	Length: 70, Diameter: 1.13, Color: Black; u.Fl compatible connector		
Mounting	Drop-in or Adhesive on bottom (optional)		

\*Additional variations available with different cable lengths, colors and connectors.

# Wi-Fi Dual Band Stamp Metal Embedded Antenna

2.4 GHz; 5 GHz

## **KEY BENEFITS**

#### **Stay-in-Tune**

Ethertronics antenna technology provides superior RF field containment, resulting in less interaction with surrounding components.

#### **Quicker Time-to-Market**

By optimizing antenna size, performance and emissions, customer and regulatory specifications are more easily met.

#### Reliability

Products are the latest RoHS version compliant

#### **APPLICATIONS**

- Embedded
  Telematics
- design Tracking Cellular, • Healthcare
- Cellular,Headsets,
- Tablets Gateway, Access •
  - Smart GridOBD-II

M2M, Industrial

devices

Point Handheld

Proprietary






2.4 GHz VSWR /SWR 3 2410 2420 Frequency (MHz)

2.4 GHz Efficiency Efficiency (%) Frequency (MHz)

VSWR 3 Frequency (MHz)

**5 GHz VSWR** 

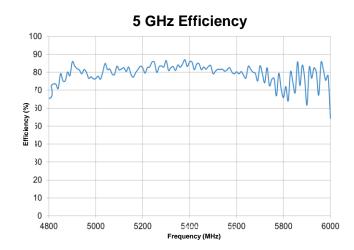


tel +(1) 858.550.3820 | fax +(1) 858.550.3821 email: eth.info@avx.com 5501 Oberlin Drive, Suite 100 San Diego, CA 92121 - USA

© 2018 Ethertronics



## **Antenna Radiation Patterns (Off-Ground)**


Typical Performance in Free-space

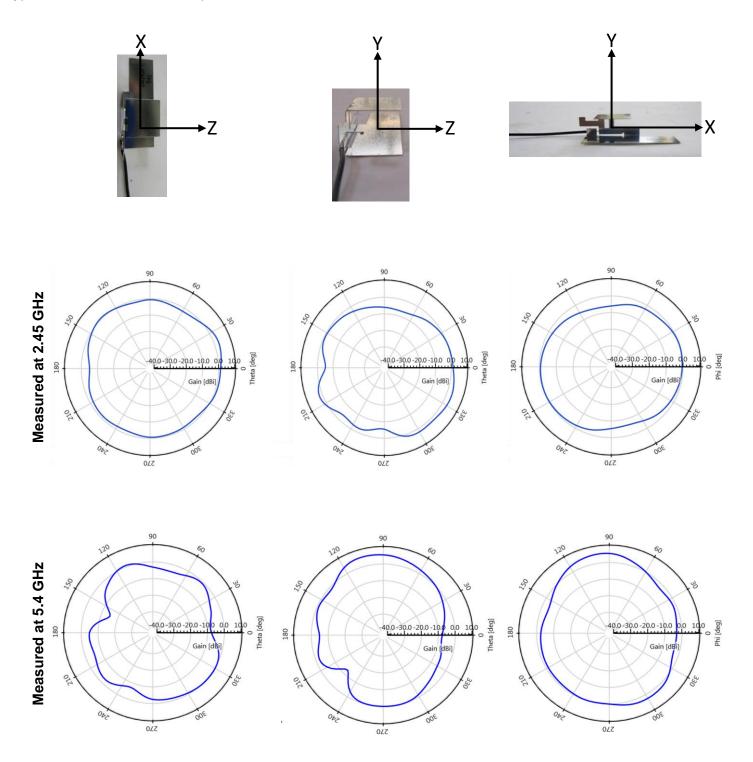



#### **VSWR and Efficiency Plots (On-Ground)**

Typical performance on 150 x 150 mm PCB

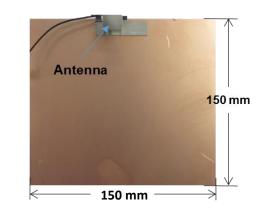

100


90

80


0


0



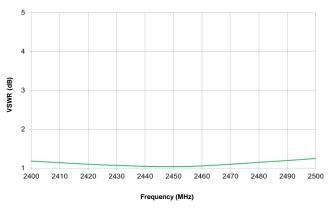


**5 GHz VSWR** 

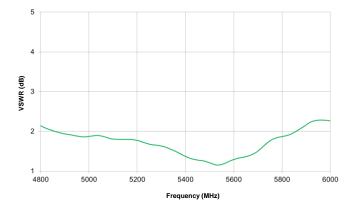

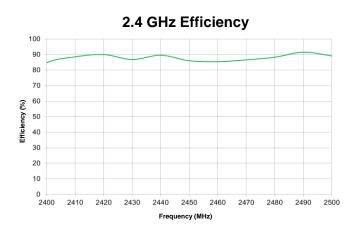



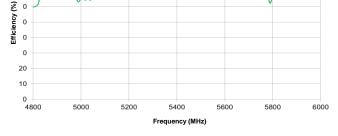


tel +(1) 858.550.3820 | fax +(1) 858.550.3821 email: eth.info@avx.com 5501 Oberlin Drive, Suite 100 San Diego, CA 92121 - USA



## **Antenna Radiation Patterns (On-Ground)**

Typical performance on 150 x 150 mm PCB

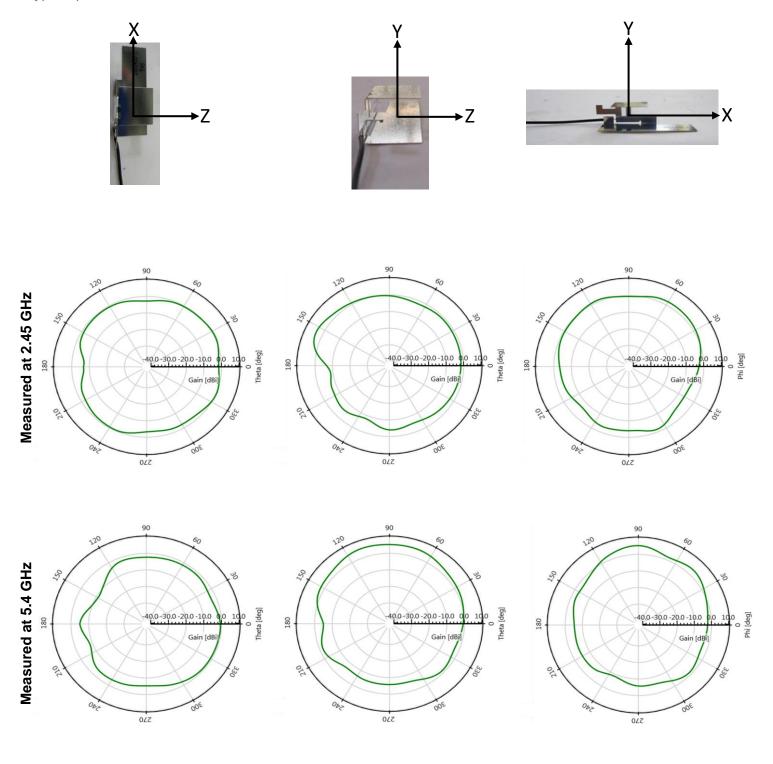





## **Antenna Dimensions**


Typical antenna dimensions, in mm.

Part Number	A (mm)	B (mm)	C (mm)
1001435	41.1 ± 0.3	14.6 max	9.5 ± 0.5

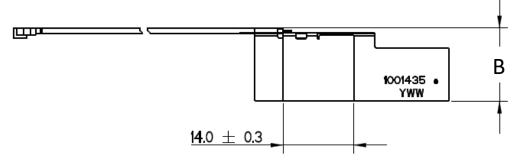

Top View

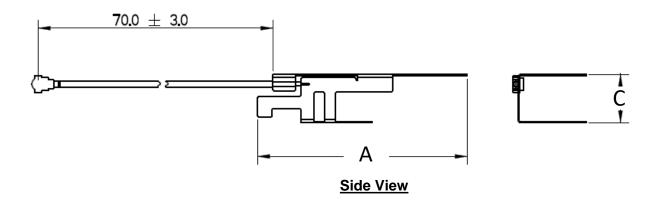

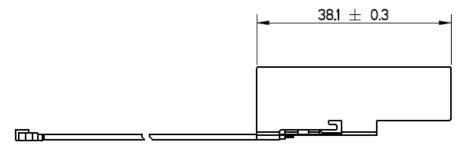

**Bottom View**