


# PROTECTION


## FPG (FPH RoHS Compliant)

### PROTECTION

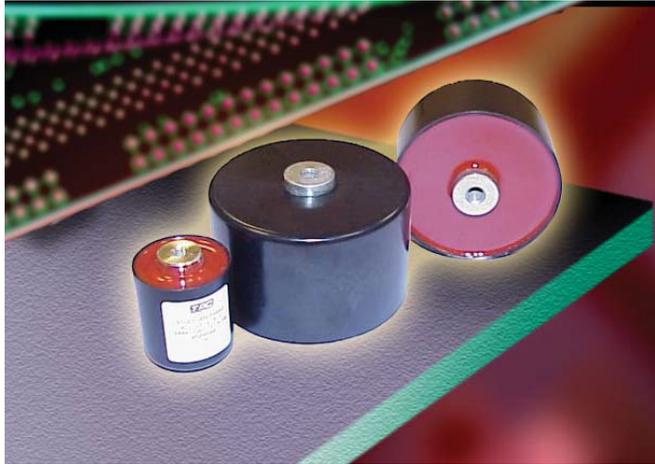

### DIMENSIONS

millimeters

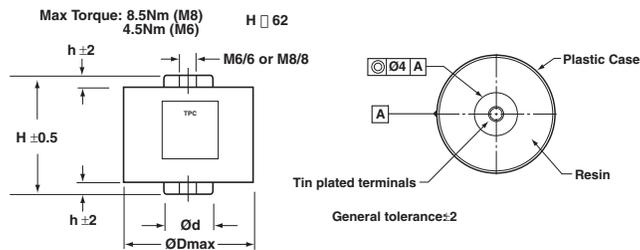

### MARKING

- Logo
- Withstanding surge voltage
- Capacitance and tolerance in clear
- Nominal DC voltage in clear
- RMS current in clear
- Date of manufacture (IEC coding)

### PACKAGING MATERIAL

Cylindrical in plastic case filled with thermosetting resin.  
 Terminals: threaded inserts either M6 or M8  
 The plastic case and the thermosetting resin are self-extinguishing materials. These two housing materials have the UL Recognition at V-0 level according to the UL 94 standard and have certified classifications according to the EN 45545-2 standard.

### HOW TO ORDER

<b>FPG</b>	<b>8</b>	<b>6</b>	<b>R</b>	<b>0105</b>	<b>J</b>	<b>--</b>
Series	Case Size	Dielectric	Voltage Code	Capacitance Code	Capacitance Tolerances	Terminal Code
FPG = Standard FPH = RoHS Compliant	Case Size 8	6 = Polypropylene	R = 1500V N = 2000V P = 2500V W = 2600V X = 3500V Z = 4500V Y = 4600V	0 + pF code 0105 = 1.0µF 0405 = 4.0µF 0604 = 0.6µF etc.	J = ± 5%	-- = Standard

Not RoHS Compliant



Metallized polypropylene dielectric capacitor with controlled self-healing.  
 Reinforced metallization on margins developed for high impulse currents.  
 Axial connections specially developed to reduce series inductance and to provide rigid mechanical mounting.

### APPLICATIONS

- Protection of Gate Turn-off Thyristor (G.T.O.)
- Medium Frequency Tuning

### HOT SPOT TEMPERATURE CALCULATION

See *Hot Spot Temperature*, page 3.

$$\theta_{\text{hot spot}} = \theta_{\text{terminals}} + (P_d + P_t) \times R_{\text{th}}$$

with

$$P_d \text{ (Dielectric losses)} = Q \times \text{tg}\delta_0 \\ \Rightarrow [ \frac{1}{2} \times C_n \times (V_{\text{peak to peak}})^2 \times f ] \times (2 \times 10^{-4})$$

$$P_t \text{ (Thermal losses)} = R_s \times (I_{\text{rms}})^2$$

where

- $C_n$  in Farads
- $V$  in Volts
- $I_{\text{rms}}$  in Amperes
- $R_s$  in Ohms
- $f$  in Hertz
- $\theta$  in °C
- $R_{\text{th}}$  in °C/W

Due to the design of the capacitor and its technology, the thermal impedance between the terminations and the core of the capacitor is low, it is necessary to take care that the capacitor is never overheated by use of incorrect sized connections.

In the case where the series diodes are screwed to the capacitor, cooling of the diodes must be taken in account.

Do not use the capacitor as a heat sink.

Due to the complexity of the diode/capacitor thermal exchanges, we recommend that thermal measurements shall be made on the different components. We would be pleased to advise you on specific problems.

### WORKING TEMPERATURE

(according to the power to be dissipated)

-40°C to +85°C

# PROTECTION

## FPG (FPH RoHS Compliant)


### ELECTRICAL CHARACTERISTICS

Capacitance range $C_n$	0.12 $\mu$ F to 6 $\mu$ F
Tolerance on $C_n$	$\pm 5\%$
Rated DC voltage $V_{n,dc}$	800 to 3000 V
Peak voltage $V_{peak}$	1200 to 4000 V
Allowable overvoltage $V_s$ (for 10 s/day)	1500 to 4600 V
Nominal RMS voltage $V_{n,dc}$	500 to 1400 V
Stray inductance	$\approx 10$ nH
RMS current	$I_{rms}$ max. = up to 80 A The currents shown in the tables are maximum. It is necessary to respect the thermal limits of the dielectric 85°C see "Hot spot temperature calculation"
Insulation resistance	$R_i \times C \geq 30,000$ s
Impulse current	$I^2.t$ max. given in the tables Spikes or peak currents in the capacitors may cause a deterioration of the bonding between the metallization and the connections. These bonds are capable of withstanding only a limited amount of energy for each spike. The table shows the maximum energy permitted in the form ( $I^2.t$ ), where I is in Ampere, and t is in seconds.
<b>Note:</b> The formula ( $I^2.t$ ) replaces $dV/dt$ which is less easy to use as it is not an expression of energy ( $I = C.dV/dt$ ). This type of capacitor has been designed to withstand high ( $I^2.t$ ) values.	
Variation of capacitance with temperature	$\frac{\Delta C}{C} \leq \pm 2\%$ between -40 and +85°C
Climatic category	40/085/56 (IEC 60068)
Test voltage between terminals @ 25°C	$V_s$ during 10s
Test voltage between terminals and case @ 25°C (Type test)	@ 7 kVrms @ 50 Hz during 1 min.
Dielectric	Polypropylene


### PROTECTION

### APPLICATION NOTES

### G.T.O. PROTECTION

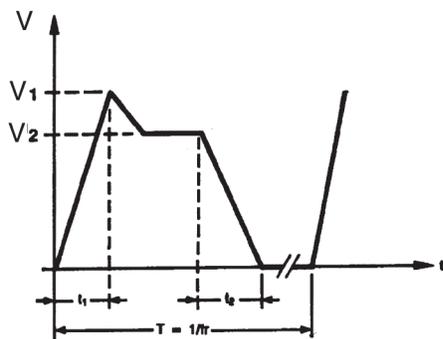

Choice of voltage:  $V_1 \leq V_{peak}$   
 $V_2 \leq V_{n,dc}$   
 Maximum overvoltage  $\leq V_s$  (10 s/day)

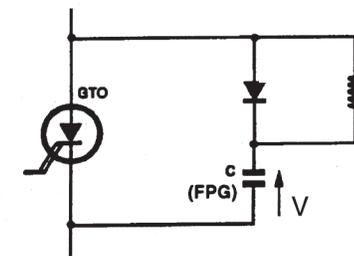

FPG: Snubber capacitor

Nominal DC voltage ( $V_{n,dc}$ ) and peak voltage ( $V_{peak}$ ) are given in the table of values.

# PROTECTION

## FPG (FPH RoHS Compliant) Table of Values

### PROTECTION

Part Number	Cn (μF)	Dimensions					I <sup>2</sup> t max. (A <sup>2</sup> .s)	I <sub>rms</sub> max. (A)	R <sub>s</sub> (mΩ)	R <sub>th</sub> (°C/W)	Typical Weight (g)
		Case Style	H* ±0.5 (mm)	h ±2 (mm)	D max. (mm)	d ±0.5 (mm)					
<b>FPG 1500V V<sub>n,dc</sub> = 800V V<sub>peak</sub> = 1200V V<sub>rms</sub> = 500V V<sub>s</sub> = 1500V (Voltage Code R)</b>											
FPG66R0105J-	1	Plastic Case M6/6	52	5	40	18	2	15	2.4	14	120
FPG66R0155J-	1.5	Plastic Case M6/6	52	5	55	18	4.6	20	1.6	10.5	160
FPG86R0205J-	2	Plastic Case M8/8	52	5	60	22	8	30	1.2	6.1	190
FPG86R0305J-	3	Plastic Case M8/8	52	5	72	22	18	45	0.9	4.5	260
FPG86R0355J-	3.5	Plastic Case M8/8	52	5	72	22	25	50	0.85	4.5	260
FPG86R0405J-	4	Plastic Case M8/8	52	5	82	22	32	60	0.75	3.5	320
FPG86R0505J-	5	Plastic Case M8/8	52	5	82	22	50	70	0.65	2.5	320
FPG86R0605J-	6	Plastic Case M8/8	52	5	92	22	73	75	0.6	2.5	400
<b>FPG 2000V V<sub>n,dc</sub> = 1000V V<sub>peak</sub> = 1600V V<sub>rms</sub> = 600V V<sub>s</sub> = 2000V (Voltage Code N)</b>											
FPG66N0504J-	0.5	Plastic Case M6/6	52	5	40	18	1	15	3	14	120
FPG86N0105J-	1	Plastic Case M8/8	52	5	60	22	3	20	2.3	10.5	190
FPG86N0155J-	1.5	Plastic Case M8/8	52	5	60	22	7	30	1.5	6.1	190
FPG86N0205J-	2	Plastic Case M8/8	52	5	72	22	12.7	40	1.1	4.5	260
FPG86N0255J-	2.5	Plastic Case M8/8	52	5	72	22	20	60	0.89	3.7	260
FPG86N0305J-	3	Plastic Case M8/8	52	5	82	22	28	60	0.85	3.2	320
FPG86N0355J-	3.5	Plastic Case M8/8	52	5	82	22	39	65	0.78	2.9	320
FPG86N0405J-	4	Plastic Case M8/8	52	5	92	22	50	70	0.7	2.5	400
<b>FPG 2500V V<sub>n,dc</sub> = 1300V V<sub>peak</sub> = 2000V V<sub>rms</sub> = 700V V<sub>s</sub> = 2500V (Voltage Code P)</b>											
FPG66P0474J-	0.47	Plastic Case M6/6	62	5	40	18	0.7	15	6	25	160
FPG66P0105J-	1	Plastic Case M6/6	62	5	55	18	2	18	3	13	180
FPG66P0155J-	1.5	Plastic Case M6/6	62	5	60	22	4.5	25	2	10	220
FPG86P0205J-	2	Plastic Case M8/8	62	5	72	22	8	35	1.5	6.5	310
FPG86P0255J-	2.5	Plastic Case M8/8	62	5	72	22	12.5	40	1.3	4.8	310
FPG86P0305J-	3	Plastic Case M8/8	62	5	82	22	18	50	1.15	4.4	410
FPG86P0405J-	4	Plastic Case M8/8	62	5	92	22	32	65	0.95	3.4	475
<b>FPG 2600V V<sub>n,dc</sub> = 1750V V<sub>peak</sub> = 2000V V<sub>rms</sub> = 800V V<sub>s</sub> = 2600V (Voltage Code W)</b>											
FPG66W0474J-	0.47	Plastic Case M6/6	62	5	40	18	1.4	12	4.04	28	160
FPG66W0105J-	1	Plastic Case M6/6	62	5	55	18	5.7	21	2.17	10.9	180
FPG66W0155J-	1.5	Plastic Case M6/6	62	5	60	18	12.9	31	1.55	7.7	220
FPG86W0205J-	2	Plastic Case M8/8	62	5	72	22	23	41	1.24	6.1	310
FPG86W0255J-	2.5	Plastic Case M8/8	62	5	82	22	36	51	1.05	4.5	410
FPG86W0305J-	3	Plastic Case M8/8	62	5	92	22	50	62	0.92	3.9	475
FPG86W0355J-	3.5	Plastic Case M8/8	62	5	92	22	70	72	0.83	3.4	475
FPG86W0395J-	3.9	Plastic Case M8/8	62	5	92	22	85	80	0.78	3.1	475
<b>FPG 3500V V<sub>n,dc</sub> = 2000V V<sub>peak</sub> = 2400V V<sub>rms</sub> = 1000V V<sub>s</sub> = 3500V (Voltage Code X)</b>											
FPG66X0334J-	0.33	Plastic Case M6/6	62	5	40	18	2	15	2.5	28	160
FPG66X0504J-	0.5	Plastic Case M6/6	62	5	55	18	5	19	2.5	11.2	180
FPG86X0105J-	1	Plastic Case M8/8	62	5	72	22	15	38	1.4	6.2	310
FPG86X0155J-	1.5	Plastic Case M8/8	62	5	82	22	40	56	1.03	3.9	410
FPG86X0205J-	2	Plastic Case M8/8	62	5	92	22	70	75	0.85	3.1	475
<b>FPG 4500V V<sub>n,dc</sub> = 2500V V<sub>peak</sub> = 3200V V<sub>rms</sub> = 1200V V<sub>s</sub> = 4500V (Voltage Code Z)</b>											
FPG66Z0224J-	0.22	Plastic Case M6/6	62	5	40	18	1.5	15	3.8	25	160
FPG66Z0474J-	0.47	Plastic Case M6/6	62	5	60	18	7	24	2.16	8.5	220
FPG86Z0684J-	0.68	Plastic Case M8/8	62	5	72	22	14	35	1.59	6.2	310
FPG86Z0105J-	1	Plastic Case M8/8	62	5	82	22	30	52	1.18	4	410
FPG86Z1254J-	1.25	Plastic Case M8/8	62	5	92	22	50	65	1	3.3	475
<b>FPG 4600V V<sub>n,dc</sub> = 3000V V<sub>peak</sub> = 4000V V<sub>rms</sub> = 1400V V<sub>s</sub> = 4600V (Voltage Code Y)</b>											
FPG66Y0124J-	0.12	Plastic Case M6/6	62	5	40	18	0.8	15	6	28	160
FPG66Y0224J-	0.22	Plastic Case M6/6	62	5	60	18	3	20	3.48	11	220
FPG86Y0334J-	0.33	Plastic Case M8/8	62	5	72	22	6.8	25	2.42	7.7	310
FPG86Y0474J-	0.47	Plastic Case M8/8	62	5	82	22	13.8	35	1.79	5.2	410
FPG86Y0604J-	0.60	Plastic Case M8/8	62	5	92	22	22	45	1.47	4.2	475