

AZ Displays, Inc.

1. MECHANICAL DATA

(1) Product No.	AGM1232C
(2) Module Size	66.1 (W)mm x 27.3 (H)mm x MAX8.4 (D)mm (W/O, EL B.L.)
(3) Dot Size	0.40 (W)mm x 0.45 (H)mm
(4) Dot Pitch	0.44 (W)mm x 0.49 (H)mm
(5) Number of Characters	122 (W) x 32 (H)Dots
(6) Duty	1/32
(7) LCD Display Mode	STN: ☐ Gray Mode ☐ Yellow Mode ☐ Blue Mode FSTN: ☐ Black and White(Normal White/Positive Image) ☐ Black and White(Normal Black/Negative Image) Rear Polarizer: ☐ Reflective ☐ Transflective ☐ Transmissive
(8) Viewing Direction	☐ 6 O'clock ☐ 12 O'clock ☐ ____O'clock
(9) Backlight	☐ W/O ☐ LED B/L ☐ EL B/L
(10) LCD Controller	SED1520
(11) Weight	W/O B/L: 17.5 g EL B/L: 19.0 g

Record of Revisions

[illegible]

AZ Displays, Inc.

2. ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

Vss=0V

	SYMBOL	MIN	MAX	UNIT	COMMENT
Power Supply for Logic	VDD–VSS	–0.3	6.5	V	
Input Voltage	VI	–0.3	VDD	V	
Static Electricity	–	–	–		Note 1

Note 1 LCM should be grounded during handling

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	NORMAL TEMP.				WIDE TEMP.			
	OPERATING		STORAGE		OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	0	50	–20	70	–20	70	–30	80
Humidity (Without Condensation)	Note 1,3		Note 2,3		Note 3,4		Note 3,5	

Note 1 Ta≦50℃ : 85%RH max
Ta>50℃ : Absolute humidity must be lower
than the humidity of 85%RH at 50℃

Note 2 Ta at –20℃ will be < 48hrs, at 70℃ will be < 120hrs

Note 3 Background color changes slightly depending on ambient temperature.
This phenomenon is reversible.

Note 4 Ta≦70℃ : 75%RH max
Ta>70℃ : Absolute humidity must be lower
than the humidity of 75%RH at 70℃

Note 5 Ta at –30℃ will be < 48hrs, at 80℃ will be < 120hrs

AZ Displays, Inc.

3. ELECTRICAL CHARACTERISTICS

(VDD = 5V±10%)

ITEM	SYMBOL	CONDITION		MIN.	TYP.	MAX.	UNIT
Input Voltage	VIH	H level		0.8VDD	—	VDD	V
	VIO	L level		0	—	0.2VDD	V
Recommended LC Driving Voltage (NORMAL TEMP. LCM)	VDD－VO	DUTY= 1/32 Bias= 1/4.7	0℃	—	6.0	6.8	V
			25℃	4.9	5.4	5.8	
			50℃	4.3	4.7	—	
Recommended LC Driving Voltage (WIDE TEMP. LCM)	VDD－VO		－20℃	—	7.3	7.9	V
			0℃	—	—	—	
			25℃	6.6	7.0	7.5	
			50℃	—	—	—	
			70℃	5.9	6.4	—	
Power Supply Current	IDD	VDD = 5.0V		—	—	2.8	mA
EL Power Supply Current	IEL	VBL = 110VAC 400Hz		—	—	5.0	mA

AZ Displays, Inc.

4.OPTICAL CHARACTERISTICS

(FOR NORMAL TEMPERATURE MODE LCM)

AT Vop

ITEM MODE		Cr(Contrast Ratio)		θ (Viewing Angle)		ϕ (Viewing Angle)	
		25℃		25℃		25℃	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
R	A	3	4.5	40	70	25	34
	C	5	9	50	80	25	36
	J						
S	A	3	4	40	75	25	32
	C	4.5	9	40	70	25	30
	J						
T	E						
	G						
NOTE		NOTE6		NOTE5			

AT $\phi=0^{\circ}$ $\theta=0^{\circ}$

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	0℃	—	580	1200	ms	NOTE 2
		25℃	—	220	450		
		50℃	—	140	280		
Response Time (fall)	Tf	0℃	—	760	1500	ms	NOTE 2
		25℃	—	170	350		
		50℃	—	90	200		

NOTE :

- R: REFLECTIVE
- S: TRANSFLECTIVE
- T: TRANSMISSIVE
- A: GRAY
- C: YELLOW
- E: BLUE
- G: NORMALLY BLACK
- J: NORMALLY WHITE

AZ Displays, Inc.

4-1.OPTICAL CHARACTERISTICS

(FOR WIDE TEMPERATURE MODE LCM)

AT Vop

ITEM MODE		Cr(Contrast Ratio)		θ (Viewing Angle)		ϕ (Viewing Angle)	
		25℃		25℃		25℃	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
R	A	3	3.5	40	45	22	28
	C						
	J						
S	A	3	3.4	40	45	20	26
	C						
	J						
T	E						
	G						
NOTE		NOTE6		NOTE5			

AT $\phi=0^{\circ}$ $\theta=0^{\circ}$

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	-20℃	—	1100	2200	ms	NOTE 2
		0℃	—	—	—		
		25℃	—	105	210		
		50℃	—	—	—		
		70℃	—	40	80		
Response Time (fall)	Tf	-20℃	—	2400	4800	ms	NOTE 2
		0℃	—	—	—		
		25℃	—	160	320		
		50℃	—	—	—		
		70℃	—	55	110		


NOTE :

R: REFLECTIVE
S: TRANSFLECTIVE
T: TRANSMISSIVE
A: GRAY

C: YELLOW
E: BLUE
G: NORMALLY BLACK
J: NORMALLY WHITE

AZ Displays, Inc.

5. BLOCK DIAGRAM

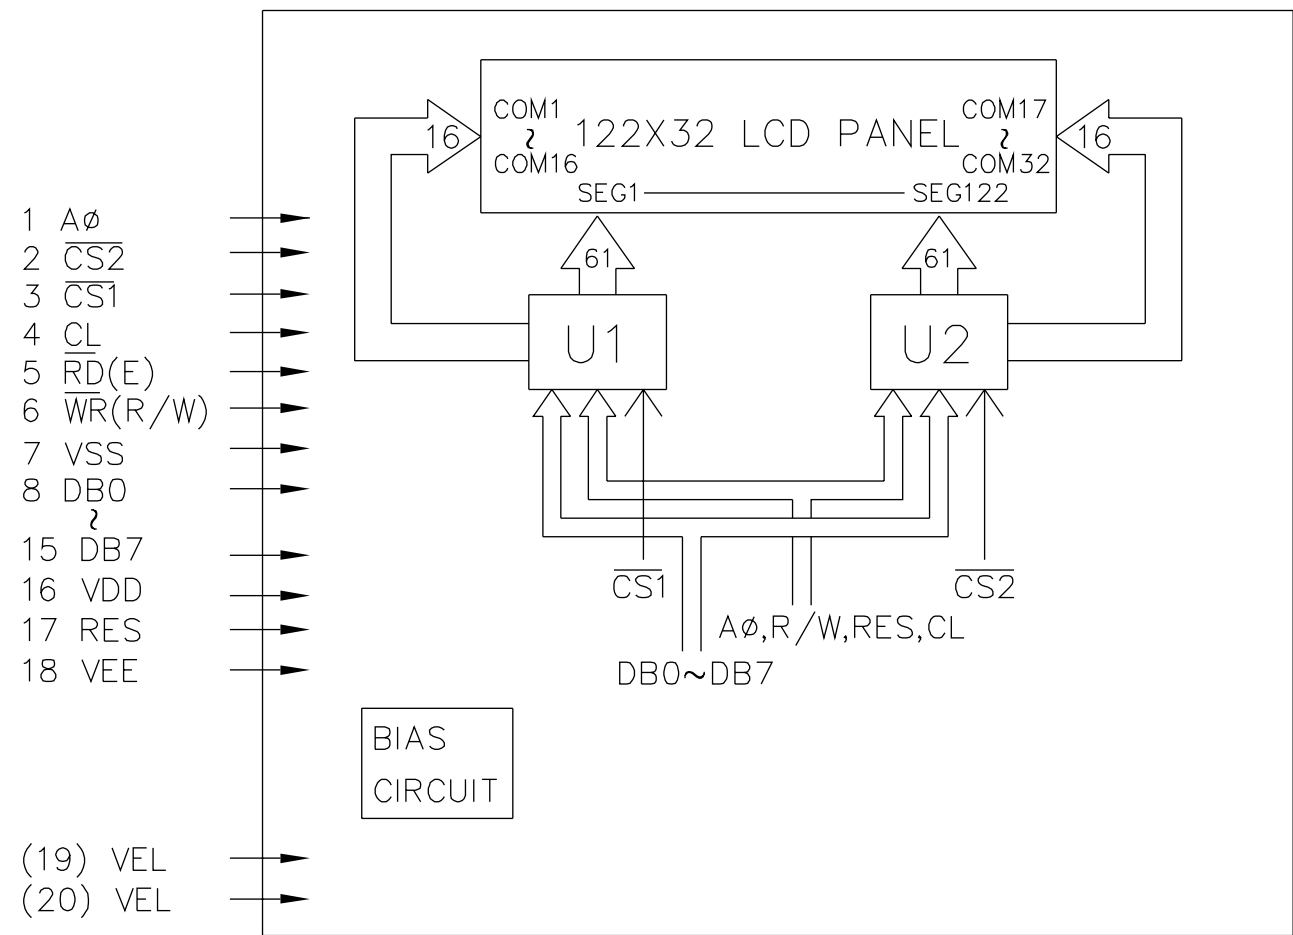


AZ Displays, Inc.

6.INTERNAL PIN CONNECTION

PinNo.	Symbol	Level	Function
1	A $\emptyset$	H/L	L→INSTRUCTION H→DATA
2	$\overline{\text{CS}}2$	L	CHIP ENABLE ACTIVE "L"
3	$\overline{\text{CS}}1$	L	CHIP ENABLE ACTIVE "L"
4	CL	H/L	EXTERNAL CLOCK(2KHZ)
5	$\overline{\text{RD}}(\text{E})$	—	$\overline{\text{RD}}$ FOR 80 SERIES,E FOR 68 SERIES
6	$\overline{\text{WR}}(\text{R/W})$	—	$\overline{\text{WR}}$ FOR 80 SERIES,R/W FOR 68 SERIES
7	VSS	—	GROUND
8	DB0	H/L	DATA BUS LINE
9	DB1	H/L	
10	DB2	H/L	
11	DB3	H/L	
12	DB4	H/L	
13	DB5	H/L	
14	DB6	H/L	
15	DB7	H/L	
16	VDD	—	POWER SUPPLY FOR LOGIC CIRCUIT
17	RES	H/L	L→80 SERIES H→68 SERIES
18	VEE	—	POWER SUPPLY FOR LCD
(19)	VEL	—	POWER SUPPLY FOR EL BACK LIGHT
(20)	VEL	—	

AZ Displays, Inc.

7. POWER SUPPLY

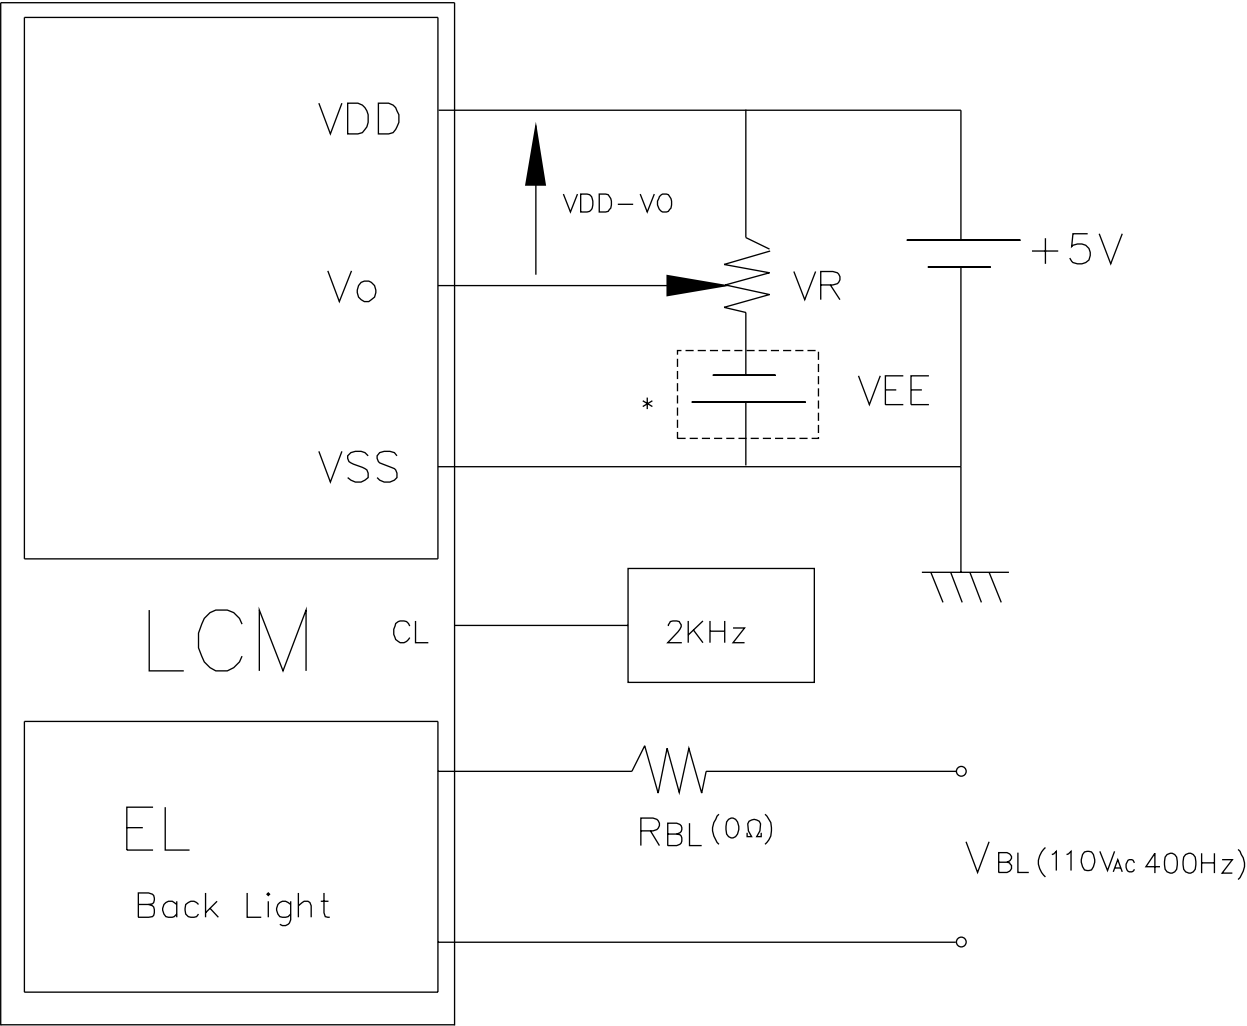

$VR = 20K\Omega$ (Variable)


* $VEE = 5V$

AZ Displays, Inc.


8. TIMING CHART

Item	Signal	Symbol	Condition	Min	Typ	Max	Unit
LOW pulse width	CL	tWLCL		35	–	–	μ s
HIGH pulse width		tWHCL		35	–	–	μ s
Rising time		tr		–	30	150	ns
Falling time		tf		–	30	150	ns
FR delay time	FR	tDFR	(Input timing)	–2.0	0.2	2.0	μ s
			(Output timing), CL=100pF		0.2	0.4	

○Read/write timing for the 68–port MPU

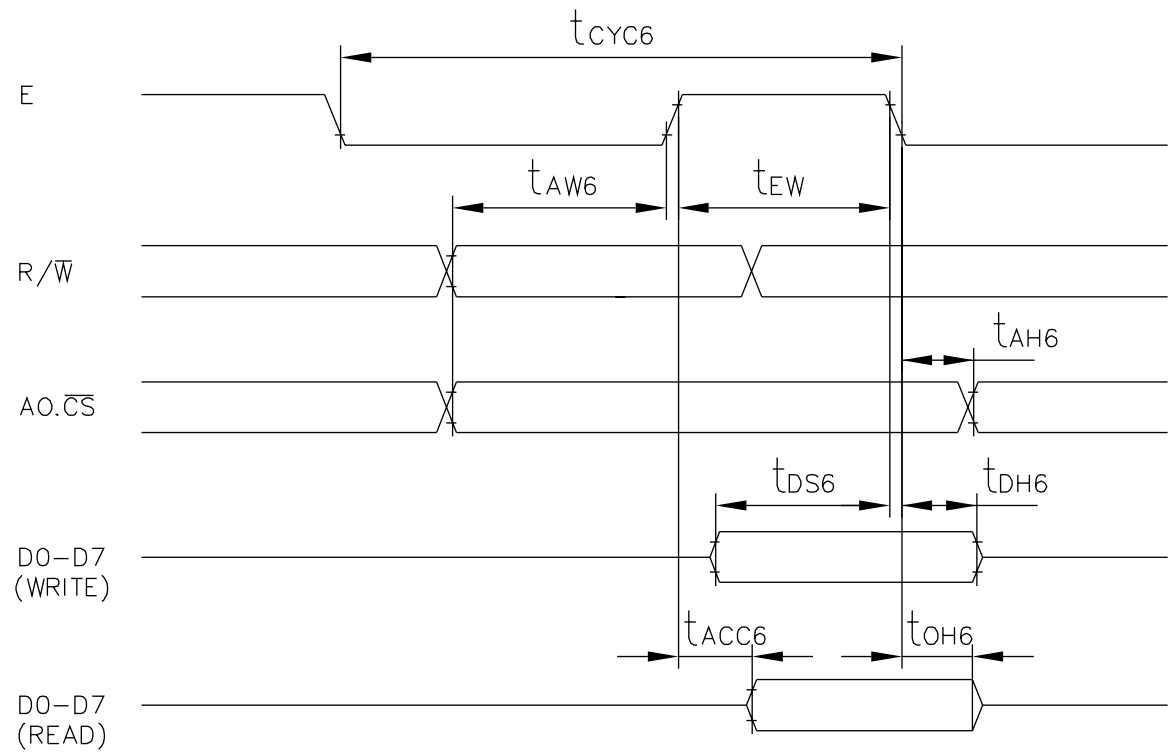


○Control timing for 80–port/68–port display

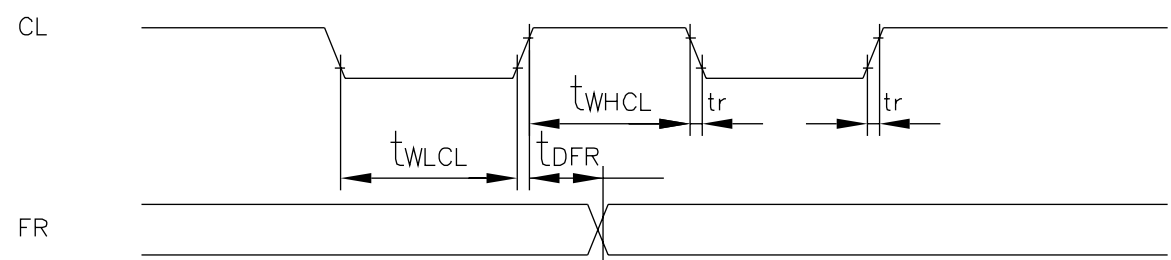

AZ Displays, Inc.


(NOTE 4)

Definition of Viewing Direction

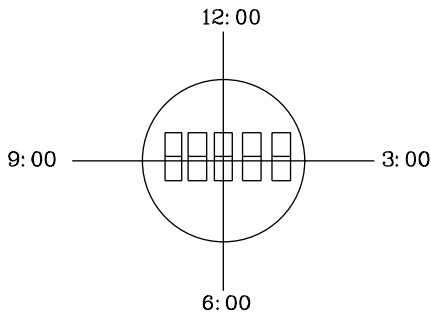

(NOTE 5)

Definition of Viewing Angle

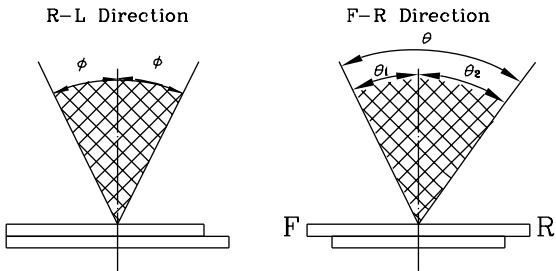


$\theta = \theta_1 + \theta_2$

*Conditions


- Operating Voltage : V_{op}
- Frame Frequency : 70Hz
- Applying Waveform : 1/N duty 1/a bias
- Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

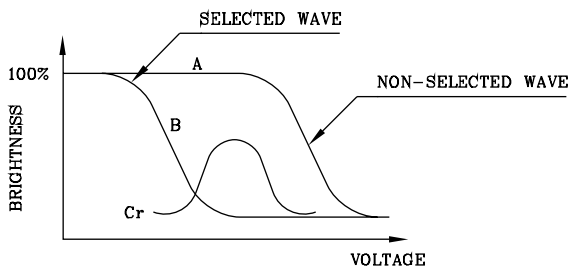

(positive type)

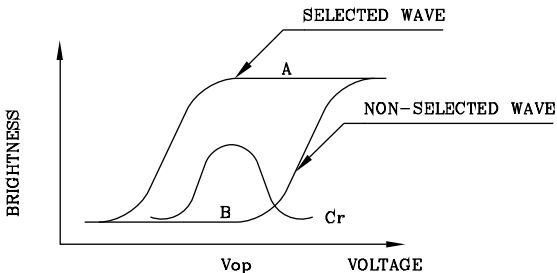

(negative type)

Contrast Ratio : $Cr = A/B$

*Conditions

- Viewing Angle : 0
- Frame Frequency : 70Hz
- Applying Waveform : 1/N duty 1/a bias

