



SUGGESTED CUTOUT: FLUSH-MOUNT APPLICATION


METAL

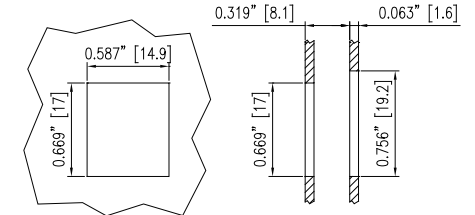

PLASTIC

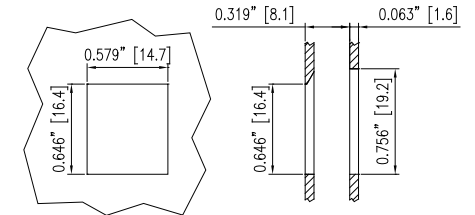

PIN ASSIGNMENTS



USOC

- 1
- 2
- 3
- 4
- 5
- 6

MATERIAL

Housing: High-impact Acrylonitrile Butadiene Styrene (ABS resin), UL 94 V-0 rated  
 Jack Contacts: 5100W spring temper phosphor bronze round wire, Ø=0.018 in (0.45 mm), plated with 50 µin (1.27 µm) minimum thick hard gold over 100 µin (2.54 µm) minimum thick nickel underplate  
 Contact Holder: High-impact PC+ABS polymer, UL 94 V-0 rated  
 PCB: FR4, UL 94 V-0 rated  
 IDC Terminals: C5191R-H phosphor bronze, t=0.018 in (0.45 mm), plated with 200 µin (5.08 µm) minimum thick tin over 50 µin (1.27 µm) minimum thick nickel underplate  
 IDC Block: High-impact Polycarbonate (PC resin), UL 94 V-0 rated  
 RoHS compliant



DRAWN BY Autumn Lee				
APPROVED BY Jerry Su				
DIMENSIONS ARE [IN (MM)]				
TOLERANCES:				
~0.8"	~2"	~6"	6"~	ANGLE
±0.007"	±0.015"	±0.02"	±0.06"	2°
3rd Angle Projection				

Another quality product from  
**BLACK BOX**  
724-746-9300 • www.blackbox.com

TITLE RJ-11 USOC Jack Yellow			
PARTS NO. FMT248			REV. 1
DATE 2011/04/11	SCALE X	SHEET 1/1	