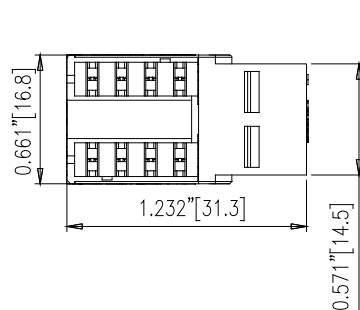




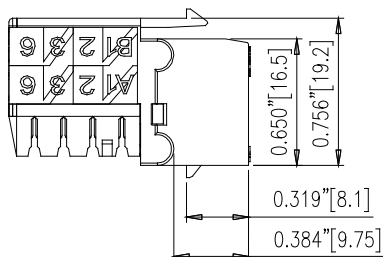


MATERIAL

Housing: High-impact Acrylonitrile Butadiene Styrene (ABS resin), UL 94 V-0 rated
 Jack Contacts: 5100W spring temper phosphor bronze round wire, $\varnothing = 0.018$ in (0.45 mm), plated with 50 μ in (1.27 μ m) minimum thick hard gold over 100 μ in (2.54 μ m) minimum thick nickel underplate
 PCB: FR4, UL 94 V-0 rated
 IDC Terminals: C5191R-H phosphorous bronze, $t = 0.016$ in (0.4 mm), plated with 200 μ in (5.08 μ m) minimum thick tin over 50 μ in (1.27 μ m) minimum thick nickel underplate
 IDC Block: High-impact Polycarbonate (PC resin), UL 94 V-0 rated
 RoHS compliant

WIRE RANGE

Conductor Diameters: 0.020 in (0.51 mm) 24 AWG - 0.025 in (0.64 mm) 22 AWG
 Insulation Diameters: 0.032 in (0.8 mm) - 0.039 in (1.0 mm)
 Cable Diameters: 0.197 in (5 mm) - 0.354 in (9 mm)

PERFORMANCE


Rating: TIA-568-C.2 Category 5e
 MHz Support: 1-100 MHz
 Compliant: TIA-568-C.2 Cat.5e Channel performance
 Bandwidth Support: 10/100/1000 Mbps




LISTED **UL 1863**
41VN **COMMUNICATIONS-CIRCUIT**
E191644 **ACCESSORIES**

SUGGESTED CUTOUT: FLUSH-MOUNT APPLICATION

METAL

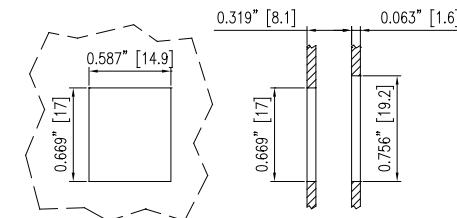

PLASTIC

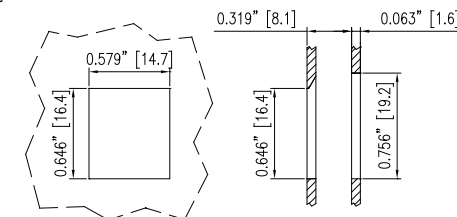

PIN ASSIGNMENTS

	T568B	T568A
1	WHITE/ORANGE	WHITE/GREEN
2	ORANGE	GREEN
3	WHITE/GREEN	WHITE/ORANGE
4	BLUE	BLUE
5	WHITE/BLUE	WHITE/BLUE
6	GREEN	ORANGE
7	WHITE/BROWN	WHITE/BROWN
8	BROWN	BROWN

DRAWN BY
 Autumn Lee
 APPROVED BY
 Jerry Su

DIMENSIONS ARE [IN (MM)]
 TOLERANCES:

~0.8"	~2"	~6"	6"~	ANGLE
±0.007"	±0.015"	±0.02"	±0.06"	2°

3rd Angle
 Projection



Another quality product from
BLACK BOX
 726-746-8900 • www.blackbox.com

TITLE
 GigaBase 2 Universal Jack
 Category 5e, Orange

PARTS NO.	REV.
FMT926-R2	1
DATE	2010/12/07
SCALE	X
SHEET	1/1