


Rev	DATE
1	04-26-13

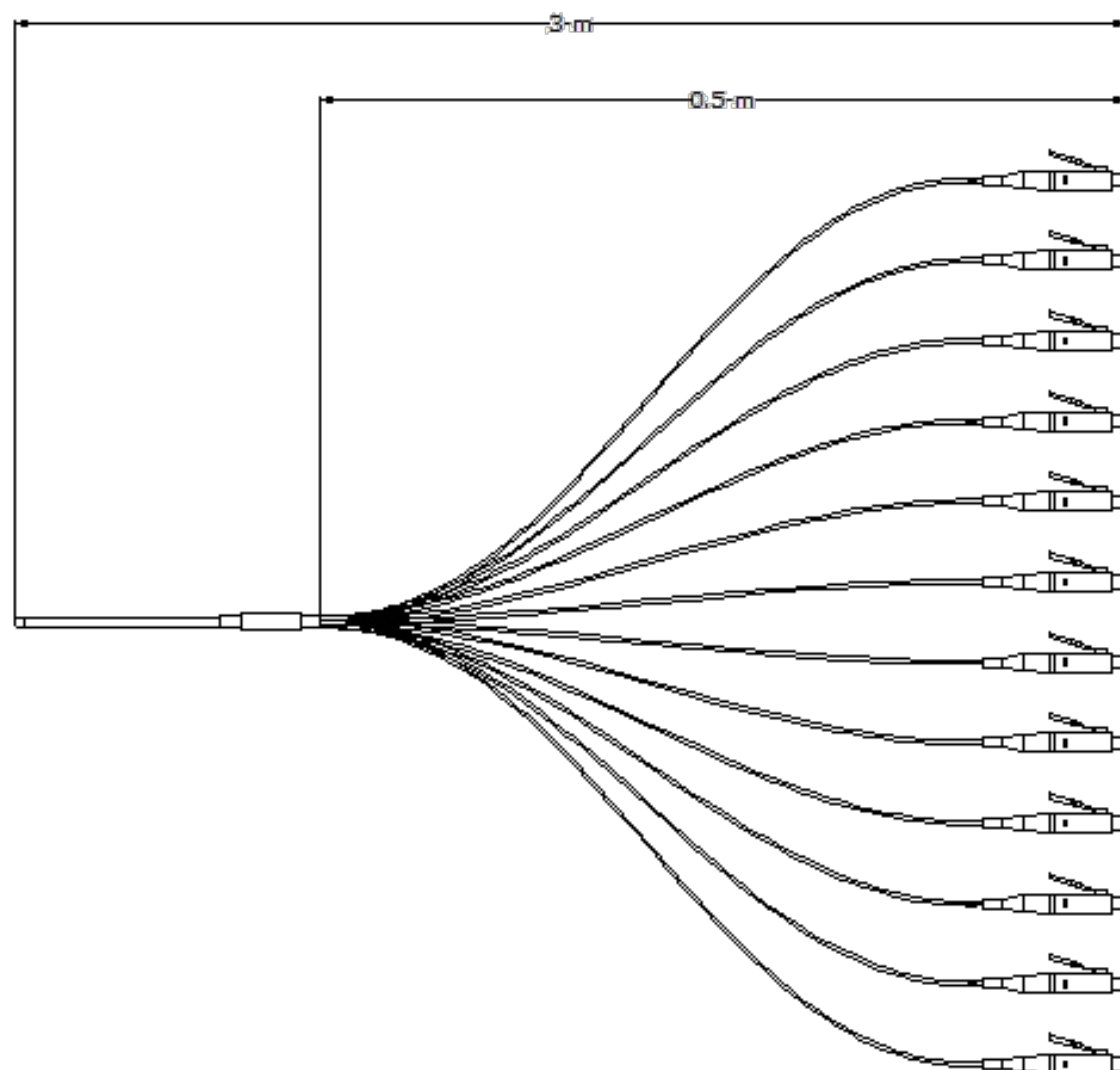

Specification	
Connector Type	LC
Fiber Strands	12 Strands (900 Micron)
Fiber Strand Identification	TIA - 598 C
Jacket Type	PVC
Glass Type	9μm (OS1) Distribution
Glass Manufacturer	Corning
Insertion Loss	≤0.2 dB
Return Loss	≥50dB
Operating Wavelength	850/1300 nm
Connector Polish	UPC

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±
ANGULAR: MACH ± BEND ±
TWO PLACE DECIMAL ±
THREE PLACE DECIMAL ±

The information contained in this document is the sole property of Black Box Corporation of Pennsylvania. Any reproduction in part or whole without the written permission of Black Box Corp. is prohibited.
©Copyright 2012 Black Box Corporation of Pennsylvania d/b/a Black Box Network Services. All Rights Reserved.
DO NOT SCALE DRAWING



NAME	DATE	TITLE:		
DRAWN Larry		Fiber Optic Pigtail Cable Single Mode, 12 Strand, with LC Connectors		
ENG APPR.		SIZE	DWG. NO.	REV
CHECKED			FOPT50S1-LC-12YL-3	
COMMENTS:		SCALE: 1:1	SHEET 1 OF 1	