
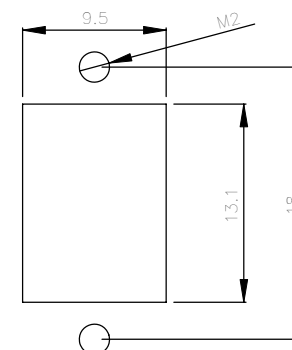

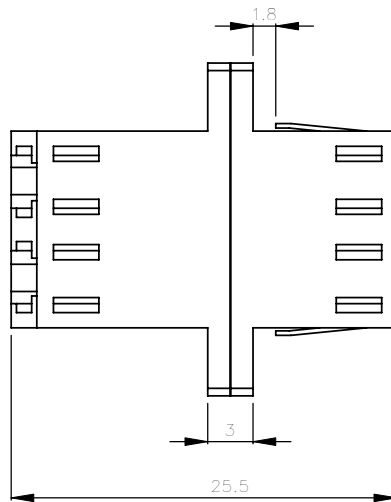


FILE NO.	FOT123,FOT126
PART NO.	-

REVISIONS				
REV.	DESCRIPTION	DATE	ECO No.	APP'VD
A	RELEASE TO PRODUCT	2010/11/05		CHANG

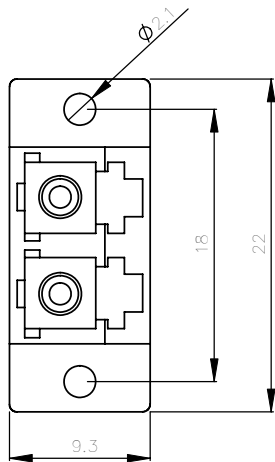

RECOMMENDED MOUNTING HOLE

- NOTES:
- 1.INSERTION LOSS: 0.20dB/0.30dB (TYP./MAX.)
 - 2.RETENTION FORCE IS 200GF(1.96N)~600GF(5.88N).
 - 3.DURABILITY (500 MATINGS) 0.15dB MAX INCREASE.
 - 4.OPERATING TEMPERATURE -40° ~+80° C.
 - 5.HUMIDITY 95% R.H.(NON-CONDENSING).
 - 6.ALL MATERIAL COMPLIANT WITH RoHS.
 - 7.BLACK BOX P/N :
S.M. PhBr : FOT123
S.M. ZrO2 : FOT126

MATERIAL	PEI		SIGNATURE	DATE	Another quality product from BLACK BOX NETWORK SERVICES 724-745-5500 • www.blackbox.com			
QUANTITY		DRAWN	LU	2010/11/05	DWG. NAME DUPLEX LC ADAPTOR FOOTPRINT			
		PROJECT ENGINEER	LU	2010/11/05				
		CHECKED	LIU	2010/11/05				
		APPROVED	CHANG	2010/11/05	SIZE	DWG. NO.	REV.	
		DRAWING MANAGER	CHUNG	2010/11/05	C	FOT123,FOT126	A	
					SCALE : N/A		2010/11/05	SHEET 1 OF 1