


FILE NO.	FOT125,FOT128
PART NO.	-

REVISIONS			
REV.	DESCRIPTION	DATE	ECO No.
A	RELEASE TO PRODUCT	2010/11/05	---

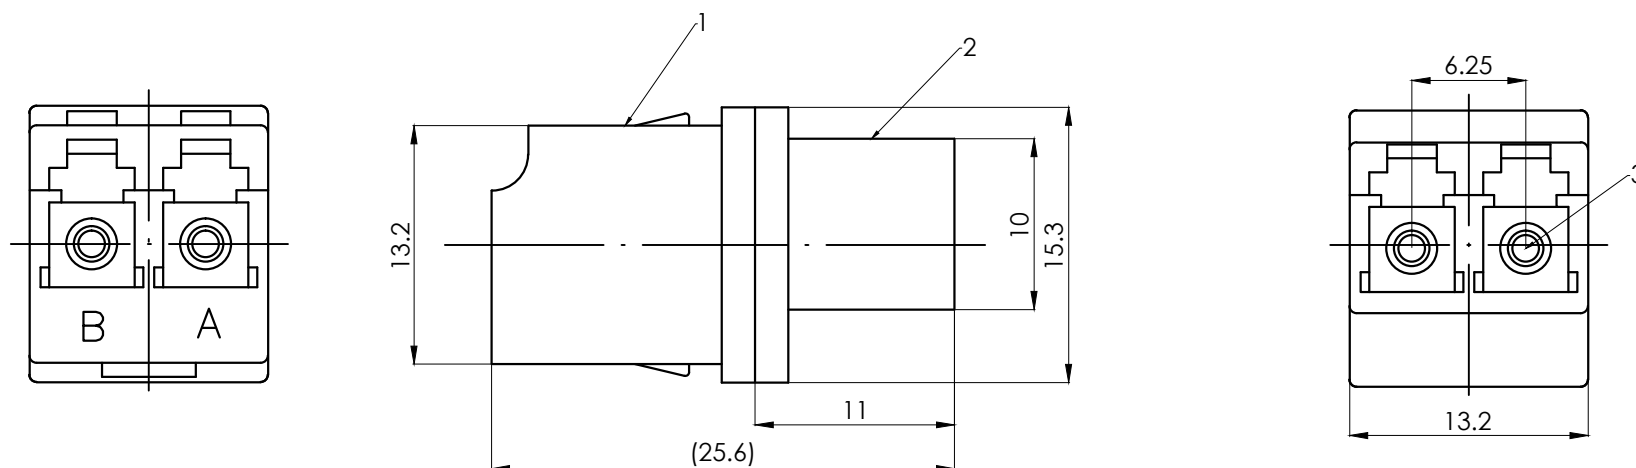

NOTE:

1.LC ADAPTOR IS FULLY COMPLIANCE WITH IEC/PAS 61754-20

LC TYPE CONNECTOR SPECIFICATIONS.

2.INSERTION LOSS : 0.2dB MAX(ZrO₂).

0.3dB MAX(PhBr).

3.DURABILITY (500 MATINGS) : 0.15dB MAX. INCREASE.

4.RETENTION FORCE : 100gf~250gf(ZrO₂).

100gf~300gf(PhBr).

5.OPERATING TEMPERATURE : -40°C~+80°C

STORAGE TEMPERATURE : -40°C~+80°C

6.ALL MATERIAL COMPLIANT WITH ROHS.

7.BLACK BOX P/N :

S.M. ZrO₂ : FOT125

M.M. PhBr : FOT128

3	SLEEVE	1	ZrO2/PhBr		---	
2	HOUSING B	1	PEI		---	
1	HOUSING A	1	PEI		---	
NO.	PART NAME	Q'TY	MATERIAL			PROCESSING
MATERIAL			SIGNATURE	DATE	Another quality product from  BLACK BOX NETWORK SERVICES 724-746-5500 • www.blackbox.com	
QUANTITY		DRAWN	LU	2010/11/05		
	PROJECT ENGINEER	LU	2010/11/05	DWG. NAME		
	CHECKED	LIU	2010/11/05	DUPLEX LC ADAPTOR{LOW PROFILE		
	APPROVED	CHANG	2010/11/05	SIZE	DWG. NO.	REV.
	DRAWING MANAGER	CHUNG	2010/11/05	C	FOT125,FOT128	A
			SCALE : N/A		2010/11/05	SHEET 1 OF 1