


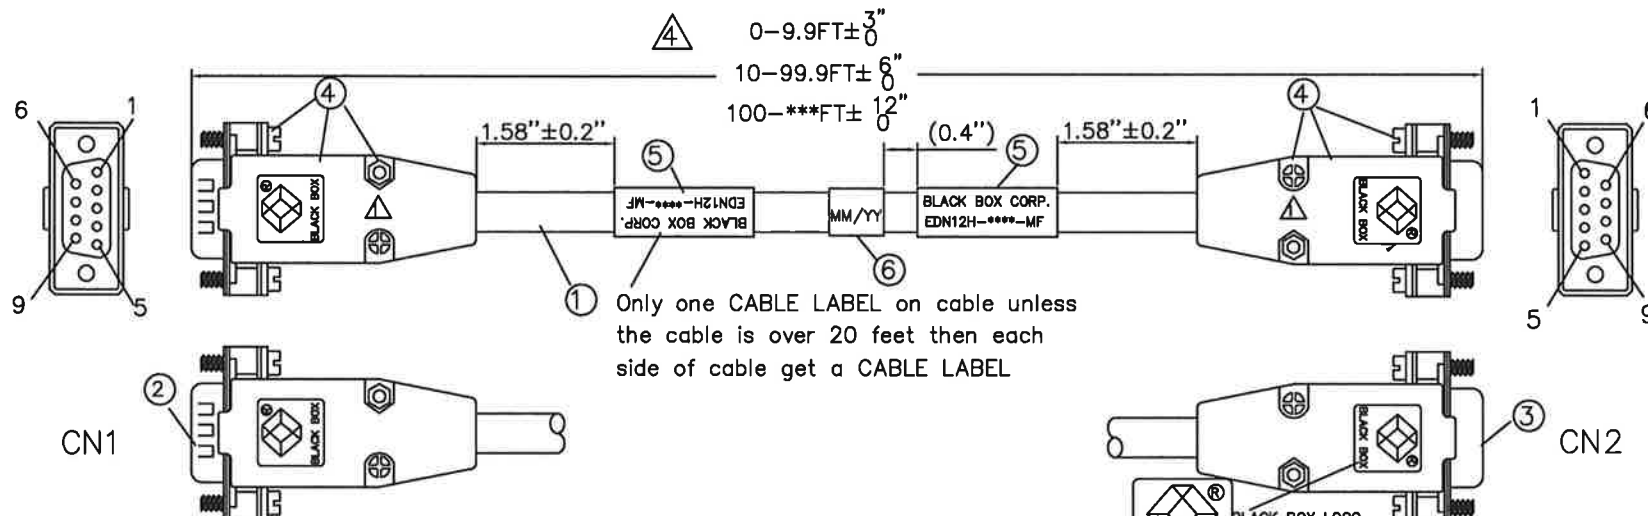


NOTE:

- 1.CABLE:UL2919 24*#5PR+EA COLOR:GRAY OD:8.0MM
MARKING:BLACK BOX CORPORATION GUARANTEED FOR LIFE (724)
746-5500 --- RS232 SERIAL CABLE --- R E223178
AWM STYLE 2919 80℃ 30V LOW VOLTAGE COMPUTER CABLE
- 2.CONNCTOR:DB9P MALE CRIMPING INSULATOR BLACK
NICKEL PLATED SHELL
- 3.CONNCTOR:DB9P FEMALE CRIMPING INSULATOR BLACK
NICKEL PLATED SHELL
- 4.MATEL SHELL:DV-9P WITH SCREW, T-WASHER ASSEMBLY TYPE
- 5.LABEL:BLACK BOX P/N LABEL
- 6.LABEL: YEAR/MONTH LABEL

ELECTRONIC TEST:

- A.OPEN/SHORT/INTERMITTENCE: 100%.
- B.HI-POT: 300V DC/sec
- C.INSULATION RESISTANCE: 20M ohm (MIN)
- D.CONDUCTIVE RESISTANCE: 0<L≤10FT 2 ohm (MAX)
10FT<L≤15FT 3 ohm (MAX)
15FT<L≤30FT 4 ohm (MAX)
30FT<L≤100FT 6 ohm (MAX)
L>100FT 10 ohm (MAX)

PART NO	LENGTH
EDN12H-0005-MF	5FT
EDN12H-0010-MF	10FT
EDN12H-0015-MF	15FT
EDN12H-0020-MF	20FT
EDN12H-0025-MF	25FT
EDN12H-0050-MF	50FT
EDN12H-0075-MF	75FT
EDN12H-0100-MF	100FT
EDN12H-0150-MF	150FT
EDN12H-0200-MF	200FT
EDN12H-0250-MF	250FT

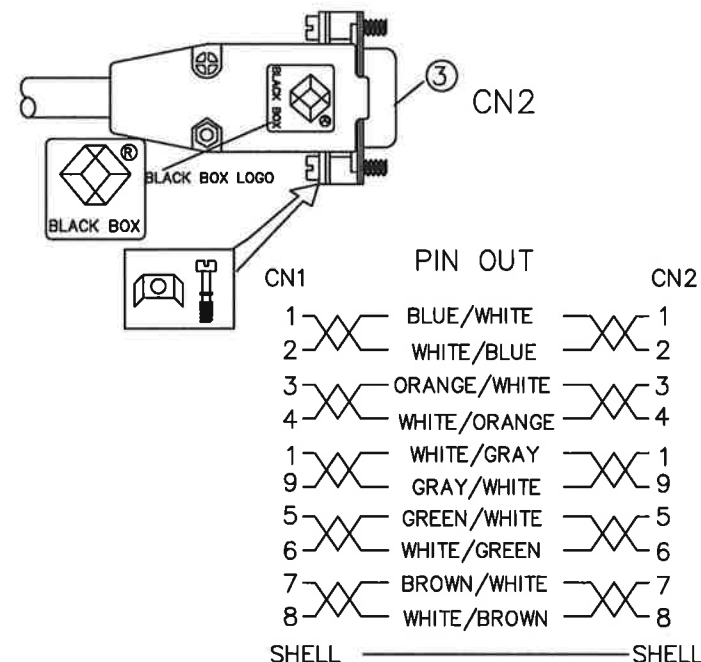

BLACK BOX			
Tolerance:	Approved by:		
X. ±	Checked by:	BLACK BOX P/N:	
.X ±	Drawn by:	EDN12H-****-MF	
.XX ±	Jingxu	Description:	
.XXX ±	Date:	DB9M/DB9F	
Angle:	11.02.10	DWG. NO:	
X* ±	Scale:	RFS-92081521	
.X* ±	Unit:mm	SHEET: 1 OF 4	
		REV: 07	

06	980618001		dong	09.06.19
05	980601001		dong	09.06.05
04	980622001		Mars	07.07.06
07	R101215002		Jingxu	11.02.10
REV	ECN NO	DESCRIPTION	APPD.	DATE