


BEL GROUPS

DCCM15SCBRPN

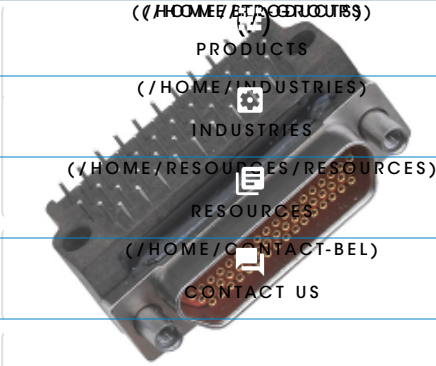

DESCRIPTION

| 15 Positions | Electroless Nickel | Thermoset, Glass-Reinforced, Diallyl Phthalate | Female | 90° PCB |

SUPPORT

REQUEST QUOTE

- > [About Us \(/home/about-us\)](/home/about-us)
- > [Newsroom \(/news/index\)](/news/index)
- > [Stock Check \(/home/stock-check\)](/home/stock-check)
- > [Careers \(/resource-center/careers\)](/resource-center/careers)
- > [Order Status \(/home/order-status\)](/home/order-status)
- > [Investors \(/investor-relations\)](/investor-relations)

DOCUMENTS

Connector Type	Socket
 Number of Positions	15
Shell Material	Aluminum alloy
Shell Finish	Electroless Nickel
Insulation Material	Thermoset, Glass-Reinforced, Diallyl Phthalate
Contact Gender	Female
Contact Material	Copper alloy
Contact Finish	Gold
Termination Type	90° PCB
Profile	Narrow
Mounting Hardware	Jackpost
Min Operating Temp. °F (°C)	-65°F (-55°C)
Max Operating Temp. °F (°C)	275°F (135°C)
Current Rating	3 Amps
Withstanding Voltage	600 VAC RMS @ sea level
Contact Resistance	8 mOhm
Max Mating Cycles	500
Contact Insertion Force	6 oz (170 gm)
Contact Withdrawal Force	0.5 oz (14 gm)