


SERIES: WCC | DESCRIPTION: WIRELESS CHARGING COIL (MULTI WINDING)

FEATURES

- Pin cooling technology and tight pin tolerance control within ± 1.0 mm after the Tin Immersion process
- Size and shape characteristics are customizable
- Qi standard compliance
- Low profile & high mechanical intensity
- Inductance tolerance is $\pm 10\%$ for (K) with inductance of 7R for $7.3 \mu\text{H}$
- Performance had been confirmed based on WPC equipment

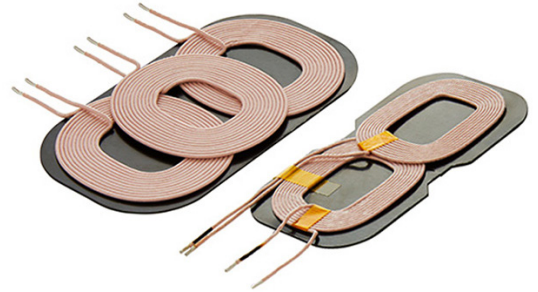

MODEL	Inductance 1 (Lo1)	Inductance 2 (Lo2)	Inductance 3 (Lo3)	Tolerance	DC Resistance 1 (DCR)	DC Resistance 2 (DCR)	DC Resistance 3 (DCR)	I _{rms}	I _{sat}
	typ [μH]	typ [μH]	typ [μH]	typ [$\pm \%$]	max [$\text{m}\Omega$]	max [$\text{m}\Omega$]	max [$\text{m}\Omega$]	typ [A]	typ [A]
WTM-7R3K-S7	7.3	7.3	-	10	50	50	-	7.0	12.0
WTM-7R1K-A28	7.1	7.1	-	10	45	45	-	7.0	10.0
WTM-7R0K-A28	7.0	7.0	6.5	10	45	45	45	7.0	12.0
WTM-12R5K-A28	12.5	11.5	12.5	10	65	65	65	7.0	10.0
WTM-12R5K-A6	12.5	11.5	12.5	10	65	65	65	7.0	10.0
WTM-9R8K-A9	9.8	10.2	9.8	10	60	65	60	8.0	10.0

Notes:

1. Test frequency: 100 kHz, 1.0V
2. Electrical specifications measured at 25°C / RH 65% unless otherwise stated.

PART NUMBER KEY

WTMX - 7R1K - A11

Type / Product Series

W = Wireless
T = Transmitter
M = Multiple Winding

Standard Code or Other

Inductance Tolerance

K = $\pm 10\%$

Inductance *

7R0 = $7.0 \mu\text{H}$
7R1 = $7.1 \mu\text{H}$
7R3 = $7.3 \mu\text{H}$
9R8 = $9.8 \mu\text{H}$
12R5 = $12.5 \mu\text{H}$

* Note: Inductance expressed by three figures. The unit is micro henry (μH). The first and second figures are significant digits, the third figure expresses the number of zeros which follow the two figures. If there is a decimal point, it is expressed by the capital letter "R" (7R1 = $7.1 \mu\text{H}$). In that case, all figures are significant digits.

SAFETY AND COMPLIANCE

Parameter	Compliant
RoHS	Compliance with ROHS, REACH, Prop 65 & Conflict Minerals

ENVIROMENTAL

Parameter	Conditions	Min	Typ	Max	Units
Operating temperature	general applications	-20		85	°C
	automotive	-40		125	°C


MECHANICAL

Parameter	Conditions	Min	Typ	Max	Units
Dimensions	WTM-7R3K-S7: 100.0 x 55.0 x 4.0				mm
	WTM-7R1K-A28: 94.0 x 52.0 x 4.0				mm
	WTM-7R0K-A28: 94.0 x 52.0 x 4.0				mm
	WTM-12R5K-A28: 94.0 x 54.0 x 4.0				mm
	WTM-12R5K-A6: 100.0 x 55.0 4.0				mm
	WTM-9R8K-A9: 101.0 x 57 x 4.0				mm


MECHANICAL DRAWING

Units: mm

WTM-7R3K-S7

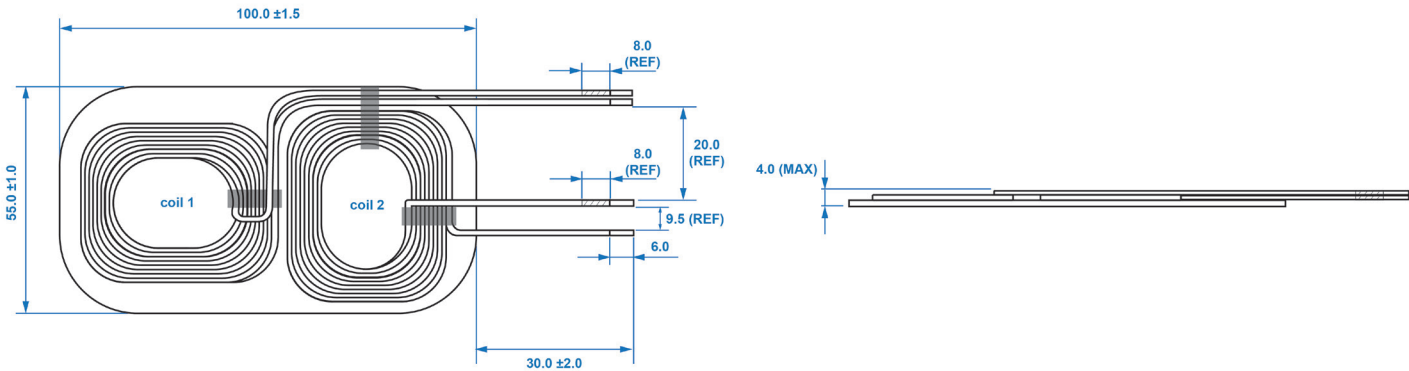


WTM-7R1K-A28

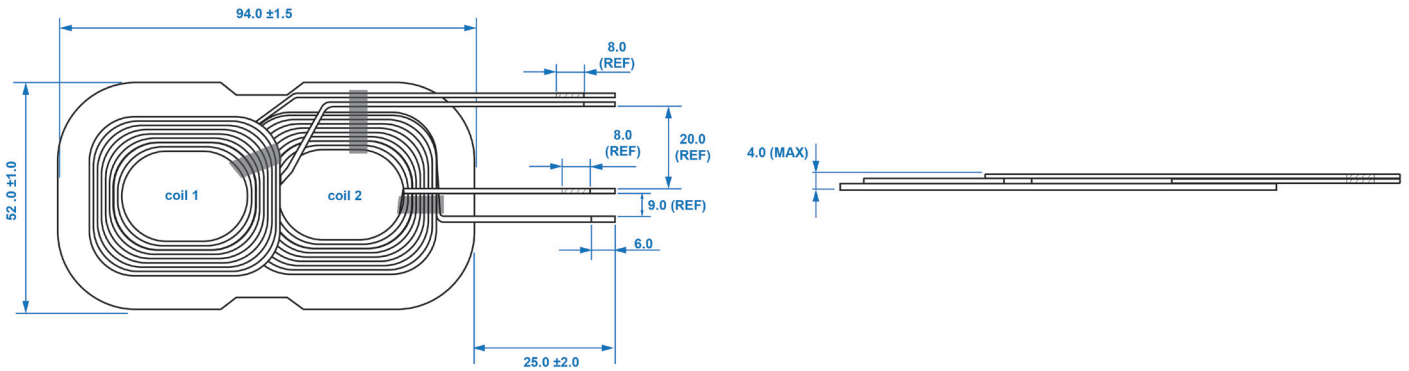



MECHANICAL DRAWING (CONTINUED)

Units: mm

WTM-7R0K-A28

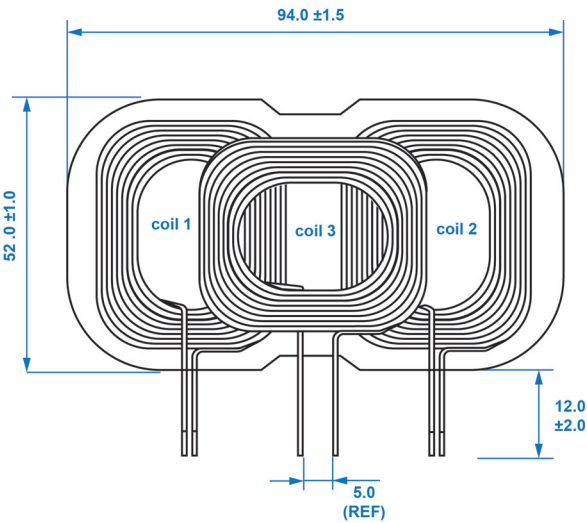


WTM-12R5K-A28

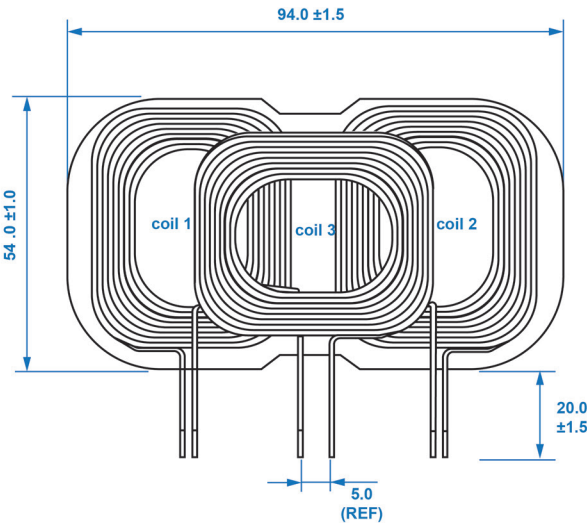



MECHANICAL DRAWING (CONTINUED)

Units: mm

WTM-12R5K-A6

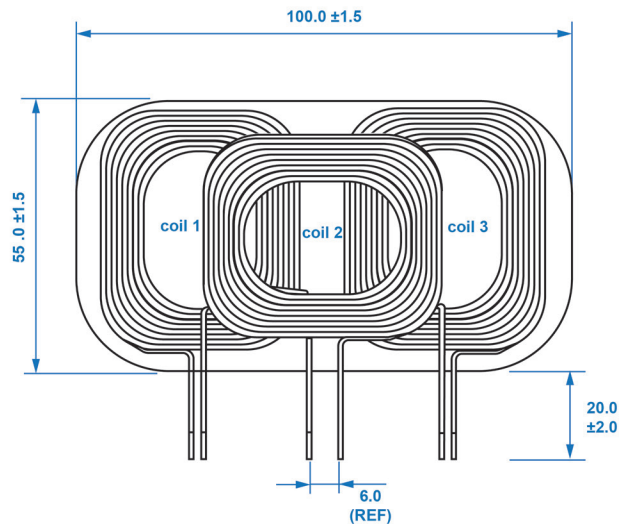

WTM-9R8K-A9

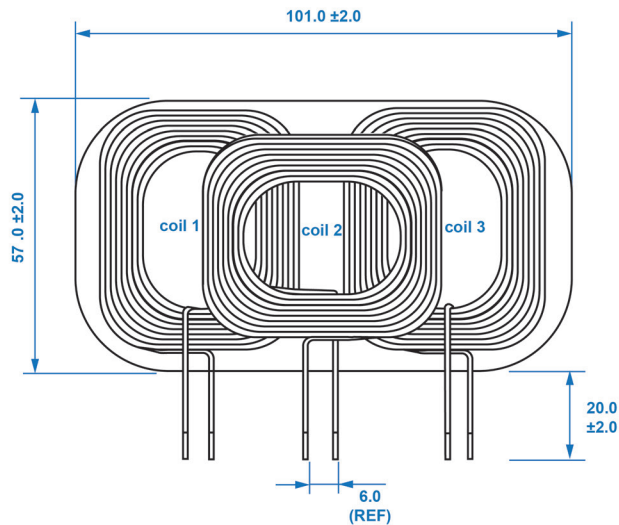

REVISION HISTORY

Rev.	Description	Date
1	initial release	June/20/2020
A	datasheet updated	July/15/2025

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Bel Fuse Inc.
300 Executive Drive, Suite 300
West Orange, NJ 07052
United States

© 2025 Bel Fuse Inc.

Toll Free 866-239-5777
Tel 516-239-5777 | Fax 516-239-7208
sales@signaltransformer.com
techhelp@signaltransformer.com

belfuse.com