


ELECTRICAL SPECIFICATIONS @25°C

RoHS



SCHEMATIC

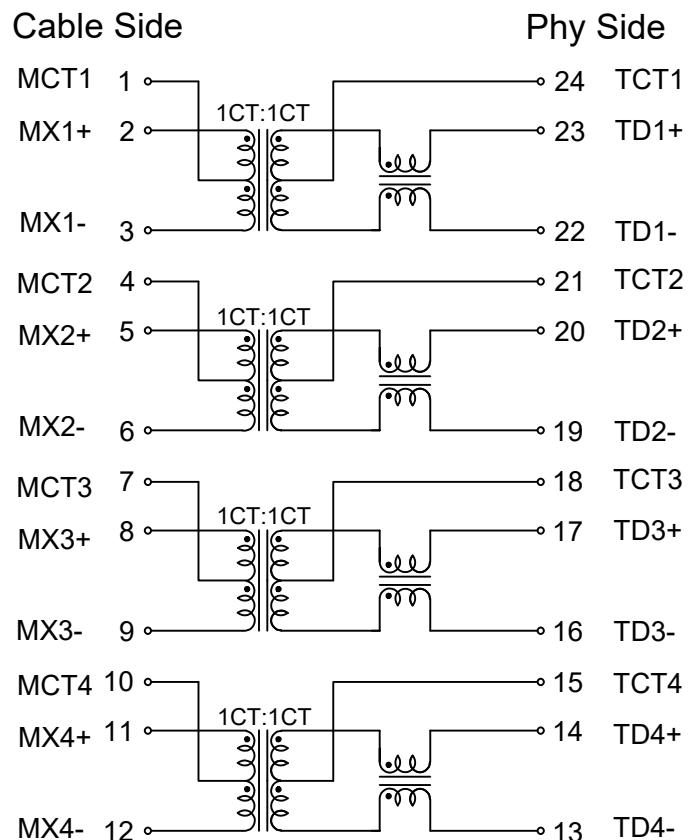

URNS RATIO

1CT : 1CT

PHASE

2 TO 23, 5 TO 20,
8 TO 17, 11 TO 14 IN PHASE

QCL

(2-3), (5-6), (8-9), (11-12)

350uH MIN. AT 100kHz, 100mV
WITH 8mA DC BIAS,

D.C.R

(22-23), (19-20), (16-17), (13-14) 1.2ΩHM Max

INSERTION LOSS

-1.0dB MAX. @ 1 TO 100MHz
-2.0dB MAX. @ 125MHz

RETURN LOSS

MEASURED UNDER A 100 Ω I/O

-18dB MIN. @ 1-30MHz
-13.1dB MIN. @ 60MHz
-12dB MIN. @ 80MHz
-10dB MIN. @ 100MHz

CROSSTALK

-30dB MIN. AT 10 TO 100 MHz

COMMON TO COMMON REJECTION

-30dB MIN. AT 100kHz TO 100MHz

HIPOT

LEAKAGE CURRENT LESS THAN 1mA AT 1500VAC

Applicable Operating temp

-40°C~+85°C

ORIGINATED BY		DATE	TITLE	PART NO. / DRAWING NO.	STANDARD DIM.		[] METRIC DIM. AS REF.	 POWER PROTECT CONNECT
yan bin zhang		2025-8-19	Electrical specification 1000BASE-T module	S558-5999-EL	TOL. IN INCH		UNIT : mm [INCH]	
DRAWN BY		DATE		FILE NAME	.X		SCALE : N/A	
ya chen zhou		2025-8-19		S558-5999-EL_A.DWG	.XX		SIZE : A4	
					.XXX			

REV. : A/2



PAGE : 1



THE INFORMATION CONTAINED HEREIN IS CONSIDERED
"PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE
COPIED, REPRODUCED OR DISCLOSED WITHOUT THE
WRITTEN APPROVAL OF BEL FUSE INC.



SUGGESTED PCB PAD LAYOUT

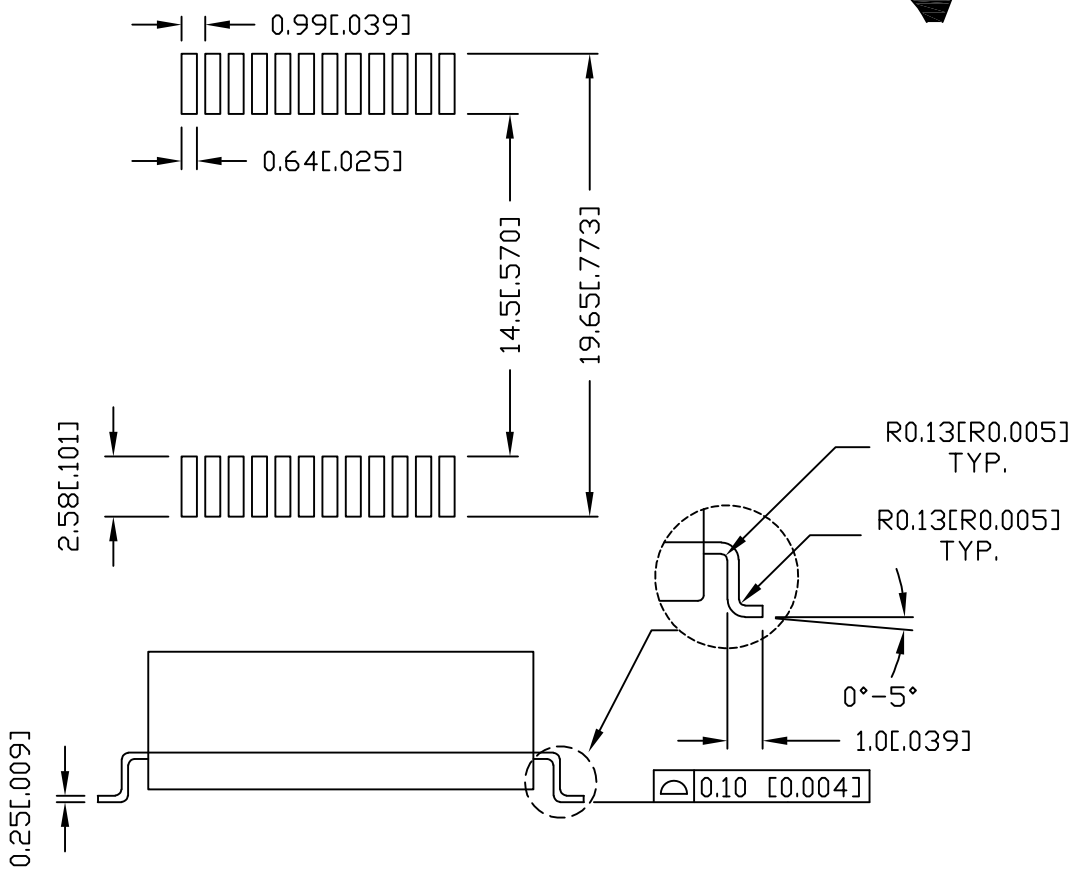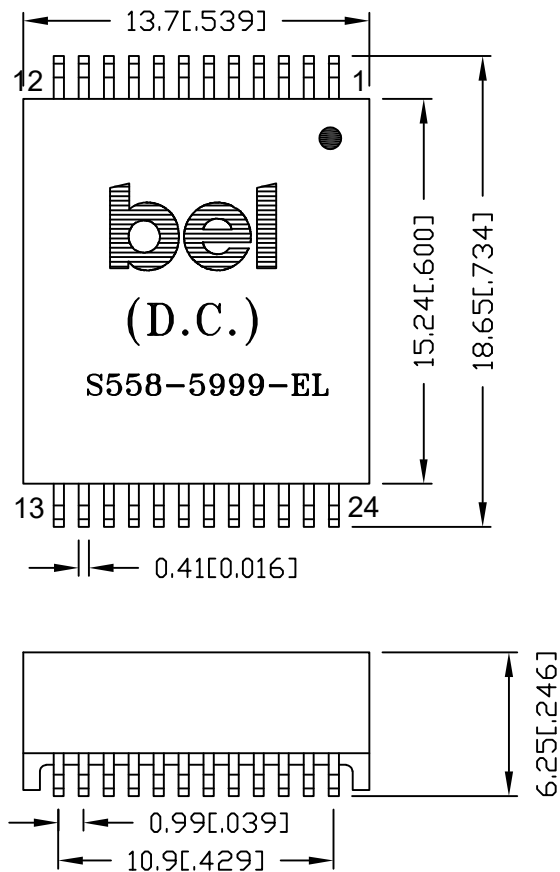

ORIGINATED BY	DATE
yan bin zhang	2025-8-19
DRAWN BY	DATE
ya chen zhou	2025-8-19


TITLE
Mechanical specification 1000BASE-T module

PART NO. / DRAWING NO.
S558-5999-EL
FILE NAME
S558-5999-EL_A.DWG

STANDARD DIM.	[] METRIC DIM. AS REF.
TOL. IN INCH	UNIT : mm[INCH]
.X	SCALE : N/A
.XX	SIZE : A4
.XXX	

REV. : A/2	PAGE : 2

THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

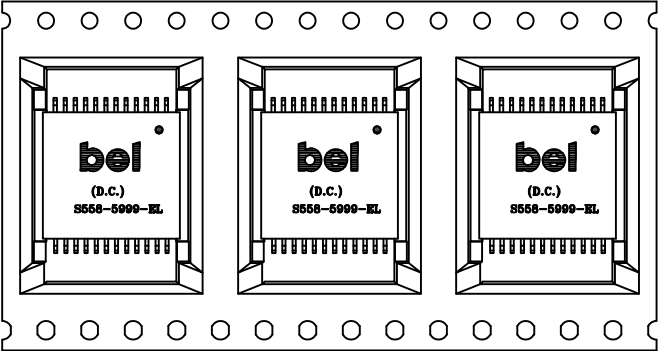

USER FEED DIRECTION

ORIENTATION OF COMPONENT INSIDE POCKET

TAPE WIDTH	32.5MM
POCKET PITCH	19.45MM
QUANTITY OF COMPONENTS PER REEL	450
PLASTIC REEL OUTER DIAMETER	13 INCHES
PLASTIC REEL HUB DIAMETER	4 INCHES
COMPLY WITH EIA-481-E	

NOTES:

- 1. HUMIDITY SENSITIVITY LEVEL:FOR PRODUCTS ACCORDING TO MSL1 CONTROL.
- 2. 2 Reels per carton.

ORIGINATED BY	DATE	TITLE	PART NO. / DRAWING NO.	STANDARD DIM.		[] METRIC DIM. AS REF.	
yan bing zhang	2025-8-19	PACKING SPECIFICATION FOR S558-5999-EL	S558-5999-EL	TOL. IN INCH		UNIT : mm [INCH]	
DRAWN BY	DATE		FILE NAME	.X		SCALE : N/A	
ya cheng zhou	2025-8-19		S558-5999-EL_A.DWG	.XX		SIZE : A4	
				.XXX			

REV. : A/2PAGE : 3


POWER | PROTECT | CONNECT

