


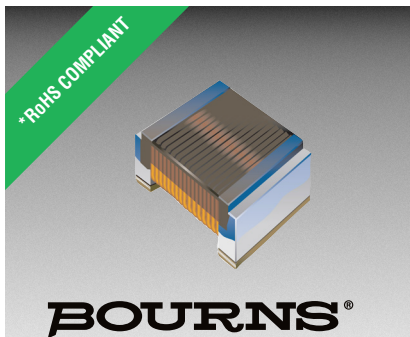

Features

- 0805 size
- Available in E12 series
- High Q up to 80 typ.
- High operating temperature of 125 °C
- Small size of only 2.0 mm
- RoHS compliant*

Applications

- Mobile phones
- Cellular phones
- CTV, VCR, HIC, FDD

CW201212 Series - High Q Chip Inductors

Electrical Specifications

Bourns® Part No.	Inductance		Q	Test Freq. (MHz)		SRF (MHz)	RDC (Ohms)		I _{rms} (mA)
	nH	Tol. %		L	Q		Min.	Max.	
CW201212-2N2J	2.2	±5	50	250	1000	6000	0.06		600
CW201212-2N7J	2.7	±5	35	250	1000	6000	0.08		600
CW201212-2N8J	2.8	±5	32	250	1000	6000	0.06		800
CW201212-3N3J	3.3	±5	30	250	1500	6000	0.08		600
CW201212-3N9J	3.9	±5	60	250	1000	6000	0.06		600
CW201212-4N7J	4.7	±5	60	250	1000	5800	0.06		600
CW201212-5N6J	5.6	±5	60	250	1000	5800	0.08		600
CW201212-6N8J	6.8	±5	60	250	1000	5800	0.06		600
CW201212-8N2J	8.2	±5	60	250	1000	5500	0.06		600
CW201212-10N2J	10	±5	60	250	500	4800	0.08		600
CW201212-12N2J	12	±5	60	250	500	4100	0.08		600
CW201212-15N2J	15	±5	60	250	500	3600	0.08		600
CW201212-18N2J	18	±5	60	250	500	3400	0.08		600
CW201212-22N2J	22	±5	60	250	500	3300	0.10		600
CW201212-27N2J	27	±5	60	250	500	2600	0.12		600
CW201212-33N2J	33	±5	60	250	500	2400	0.15		500
CW201212-39N2J	39	±5	60	250	500	2100	0.18		500
CW201212-47N2J	47	±5	60	200	500	1700	0.15		500
CW201212-56N2J	56	±5	60	200	500	1600	0.25		500
CW201212-68N2J	68	±5	60	200	500	1450	0.27		500
CW201212-82N2J	82	±5	60	150	500	1350	0.32		500
CW201212-R10J	100	±5	60	150	500	1200	0.43		400
CW201212-R12J	120	±5	50	150	250	1100	0.48		400
CW201212-R15J	150	±5	50	100	250	950	0.67		400
CW201212-R18J	180	±5	50	100	250	900	0.85		350
CW201212-R22J	220	±5	50	100	250	860	1.10		300
CW201212-R27J	270	±5	45	100	250	850	1.46		250
CW201212-R33J	330	±5	45	100	250	800	1.65		200
CW201212-R39J	390	±5	45	100	250	780	2.20		170
CW201212-R47J	470	±5	33	50	100	375	1.72		250
CW201212-R56J	560	±5	23	25	50	340	1.90		230
CW201212-R68J	680	±5	23	25	50	270	2.05		190
CW201212-R82J	820	±5	23	25	50	230	2.30		180
CW201212-R91J	910	±5	22	25	50	220	2.50		150

Note: 2 % tolerance available for inductance ranges of 12 nH and above.
Replace "J" with "G".


General Specifications

Temperature Rise40 °C max. at rated current
Operating Temperature-40 °C to +125 °C
Storage Temperature-40 °C to +125 °C
Reflow Soldering .. 230 °C, 50 sec. max.
Resistance to Soldering Heat +260 °C, 5 seconds
Moisture Sensitivity Level2
ESD Classification (HBM)..... N/A


Materials

Core Material
-2N2J through -R39J.....Ceramic
-R47J through -R91J.....Ferrite
Wire Enameled copper (1W1E180)
Terminal Mo/Mn+Ni+Au
Packaging 2,000 pcs. per reel

Product Dimensions

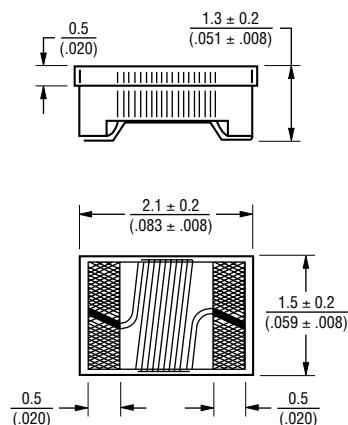

Recommended Layout

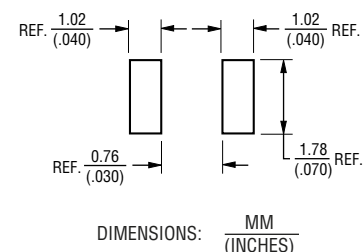

WARNING Cancer and Reproductive Harm - www.P65Warnings.ca.gov

* RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice. Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf