

Self-Laminating Vinyl Wrap Around Labels for BMP61 BMP71 M611 - 0.75"x 0.5", White / Clear


Overview Specifications Support Related Items



PTL-11-427 has been discontinued.

Replacement Product:
We recommend this product which provides similar performance

Self-Laminating Vinyl Wrap Around Wire and Cable...
M6-11-427
\$51.99

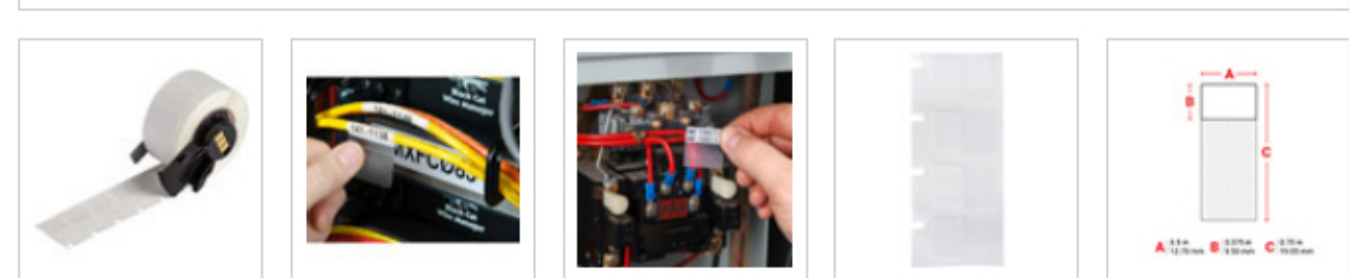

Add To Compare

Part Number: PTL-11-427
DISCONTINUED

Overview

Self-Laminating Vinyl (B-427) is an excellent material for wire and cable identification. This material has good clarity, conformability and is self-extinguishing.

- Provided in a self-laminated format with a white printable zone and translucent overlaminating area to protect text
- Durable, permanent acrylic adhesive has outstanding water and oil resistance
- UL approved
- Service temperature of -40°F to 158°F (-40°C to 70°C)
- A ribbon is required to print this material. Use Part Number M61-R4310 for the BMP®61 Label Printer / BradyPrinter M611 Mobile Label Printer or M71-R4300 for the BMP®71 Label Printer. This label is no longer compatible with TLS Series Printers

Specifications

Key Characteristics	Catalog Page # ?	130
	Product Number	18346
	UPC	662820183464
	Applications ?	Cable & Wire Marking, Panel Labeling
	UOM	Roll of 500 Labels
	Quantity per Roll	500
	Unit Price	\$0.00/Label
	Trade Name	BMP®61 BMP®71 TLS 2200® TLS-PC Link™
	Brand Name	Brady®
	Country of Origin ?	Mexico
	HTS Code (Harmonized Tariff Schedule) ?	8443.99.2550
	ECCN (Export Commodity Control Number) ?	EAR99

Dimensions	Dimensions	0.75 in H x 0.5 in W
	Height	0.75 in
	Width	0.5 in
	Label/Tape Size	0.75 in H x 0.5 in W
	Printable Area Dimensions ?	0.375 in H x 0.5 in W
	Printable Area Height	0.375 in
	Printable Area Width	0.5 in
	Thickness	0.004 in
	Vertical Repeat	0.625 in
	Web Width	1.062 in

Material Characteristics	Material Number ?	B-427 (View Technical Data Sheet)
	Material ?	Self-laminating Vinyl
	Material Properties	Flame-retardant, Self-laminating
	Label Properties	Self Laminating & Wrap Around
	Adhesive Type	Permanent Acrylic
	Finish	Matte
	Color	White, Clear
	Resistance Properties	Chemical-Resistant, Humidity-Resistant, Oil-Resistant, Water-Resistant, Weather-Resistant
	Indoor or Outdoor Use	Outdoor Use
	Service Temperature Range °F	-94 °F - 158 °F
	Minimum Service Temperature °F	-94 °F
	Minimum Service Temperature °C	-94 °C
	Maximum Service Temperature °F	158 °F
Compatible Surface Types	General	

Product Features	Application ?	Data and Telecommunications Labeling, Electrical Labeling, Laboratory Labeling, Wire and Cable Labeling
	Shape	Rectangle
	Corner Type	Rounded Corners
	Label/Media Format	Roll
	Quantity per Row	1

Printing Specifications	Print Technology	Thermal Transfer
--------------------------------	------------------	------------------

Compatibility	Printer Compatibility	BMP61, BMP71 (with media adapter)
	Recommended Ribbon ?	M61-R4310, M71-R4300
	Suggested Ribbon Series	R4300, R4500
	Wire Diameter Range	0.060 in to 0.119 in
	Wire Gauge Range ?	22 AWG - 16 AWG

Preprinted Information	Pre-Printed Areas on Label	Colored Write-On Area
-------------------------------	----------------------------	-----------------------

What's Included	Overlamine Included	Overlamine Included
	Secondary Label Included	Secondary Label is Not Included

Compliance	UNSPSC ?	55121612
	California Prop 65 ?	Due to inconclusive data, this product may not ship to California at this time
	RoHS Compliance Status	Please contact our CS department for more information

Related Items

R4300 Series Halogen Free Ribbon for M6 Printers - Black
M61-R4310
\$35.09 (USD)

Support

LITERATURE



Material Conversion Sheet

Corporate

- About
- Careers
- ESG
- Investors
- Do Not Sell or Share My Personal Info
- Privacy Policy
- Accessibility Statement
- Terms and Conditions
- ISO Certificates

Other Brady Sites

- Distributor Portal
- International Sites
- Brady Virtual Showroom

Help

- Contact Us
- Customer & Technical Support
- Resource Center
- Searchable Support Articles
- Certificate Request
- Website Feedback

Contact

6555 W. Good Hope Rd
Milwaukee, WI 53223
Phone: 888-250-3082
Hours: 7:00am-5:00pm CT
Monday-Friday