

# Single-phase, primary switched mode power supply **PC-0112-150-0**



Picture shows PC-0124-200-0

## Advantages

Stabilized and adjustable output voltage
Fast tripping of conventional circuit breakers
DC OK indicator
Parallel operation
Push-in terminals
Robust DIN rail mounting
Resistant to transient overvoltages up to 4 kV
3 years warranty

## Applications

Power Compact combines the basic functionality of an economic switched mode power supply with key additional features to ensure high system availability. A powerful and flexible option that's still light and compact. Our real all-rounders, these power supply units are suitable for a highly diverse range of applications in solar, measurement and control technology and they really come into their own in industrial and building automation. The devices cover the average power requirement from 120 W to 480 W. Versions with 12 V, 24 V, and 48 V are available, which allow a range of applications. A version with 5 A rated current is available for a single or two-phase supply from 180 V to 550 V. The output voltage can be set easily using the rotary potentiometer on the front of the housing. The robust DIN rail fastening method and push-in connection terminals enable fast and secure mounting.

For applications in the medical field, power supplies are available with approval according to UL 60601-1.

## Standards

Primary switched mode power supply  
to UL 60950, UL 508

Safety:  
EN 61558-2-16, EN 60950-1

EMC:  
EN 61204-3

## Approvals



UL/CSA 60950 recognised, UL508 listed, Germanischer Lloyd




# Single-phase, primary switched mode power supply

## PC-0112-150-0

Type	PC-0112-150-0
<b>Electrical data</b>	
<b>Special features</b>	
Characteristics	Active inrush current limit
<b>Input</b>	
Input rated voltage	100 - 240 Vac
Input voltage range	85 - 264 Vac (120 - 372 Vdc)
Input voltage derating	-2.5 %/Vac < 100 Vac
Rated frequency range	44 Hz - 66 Hz / 0 Hz
Input rated current (rated load)	2.07 A (100 Vac) / 0.95 A (230 Vac)
Starting current limiter	< 30 A, NTC (active)
Switch-on time	0.71 s (100 Vac) / 0.43 s (230 Vac)
Mains buffering (rated load)	28 ms (100 Vac) / 28 ms (230 Vac)
Power factor	0.91 (active PFC)
Input fuse internal	6.3 A
Recommended back-up fuse (circuit breaker)	10 A, 16 A, characteristic B, C
Transient surge voltage protection	Varistor
<b>Output</b>	
Output rated voltage	12 Vdc
Output voltage range	11.5 - 15 Vdc
Output rated current	15 A
Output limited current	typ. 16.5 A (constant current)
Tripping of LS circuit breakers	max. B4
Parallel connection	Yes
Serial operation	Yes
Power dissipation, no load/rated load	4.4 W / 21.8 W (230 Vac)
Max. power losses	24.7 W (100 Vac / 12 V / 15 A)
Efficiency	typ. 90 %
Ripple factor	typ. 35 mVss
Resistance to reverse feed max.	35 Vdc
Over-voltage-protection	max. 20 Vdc
<b>Signaling</b>	
Typ. switching threshold for LED and signal output (DC OK)	-
Status indicator	LED green
Signal output	Relay contact
<b>Approvals</b>	
Approvals	cURus, cULus, GL
<b>Environment</b>	
Type of cooling	natural convection
Ambient temperature	-13 °F to +158 °F
Storage temperature	-13 °F to +185 °F
Derating	-5 %/K > +140 °F @ 196 - 264 Vac -2.5 %/K > +122 °F @ 85 - 195 Vac
Required minimum spacing (left/right)	0.00 inch
Required minimum spacing (over/under)	1.97 inch
<b>Safety and protection</b>	
Protection index	IP 20
Safety class	I, with PE connection
<b>Order numbers</b>	
<b>Order Number</b>	<b>PC-0112-150-0</b>

Type	PC-0112-150-0
<b>Mechanical data</b>	
<b>Environment</b>	
Mounting position	horizontal for standard rail DIN TS35
<b>Terminal and mounting</b>	
Terminals signalling (direct plug-in technology Push-in)	max 2,5 mm <sup>2</sup>
Terminals input (direct plug-in technology Push-in)	max 2,5 mm <sup>2</sup>
Terminals output (direct plug-in technology Push-in)	max 2,5 mm <sup>2</sup>
<b>Measures and weights</b>	
Weight	2.05 lbs
<b>Dimensions in inch</b>	

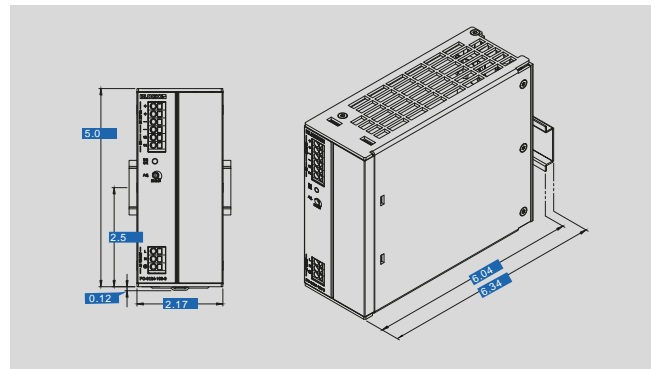

Subject to change.