

# Single-phase, primary switched mode power supply **PM-0124-038-0**



Picture shows PM-0124-040-0

## Advantages

Stabilized and adjustable output voltage
Low stand-by consumption <1 W
Constant current limiting without overload shutdown
DC OK indicator
Push-in terminals
Robust DIN rail mounting
In compliance with EN 60335-1
3 years warranty

## Applications

Efficient, primary switched mode power supply in slim plastic housing. A powerful and flexible option that's still light and compact. Our real all-rounders, these power supply units are suitable for a highly diverse range of applications in solar, measurement and control technology as well as industrial and building automation. The devices cover the lower and average power requirements from 25 W to 100 W. Versions with 12 V, 24 V, 30.5 V and 48 V are available, enabling a whole range of applications. A version with 3.8 A rated current is available for establishing NEC Class 2 circuits. All power supplies also comply with the EN 60335-1 standard for domestic appliances. The output voltage can be easily set using the rotary potentiometer on the front of the housing. The DIN rail fastening method and push-in connection terminals enable fast and secure mounting.

Versions for construction of AS-i circuits as well as for medical applications according to UL 60601 are available.

## Standards

Primary switched mode power supply for NEC Class 2 applications to UL 60950, UL 508

Safety:  
EN 61558-2-16, EN 60950-1, EN 60335-1

EMC:  
EN 61204-3

## Approvals



UL/CSA 60950 recognised, UL508 listed, Germanischer Lloyd




# Single-phase, primary switched mode power supply

## PM-0124-038-0

Type	PM-0124-038-0
<b>Electrical data</b>	
Special features	
Characteristics	For establishing NEC Class 2 circuits
Input	
Input rated voltage	100 - 240 Vac
Input voltage range	85 - 264 Vac (120 - 372 Vdc)
Input voltage derating	-2,5 %/Vac < 95 Vac
Rated frequency range	44 Hz - 66 Hz / 0 Hz
Input rated current (rated load)	1.5 A (100 Vac, 91 W) / 0.6 A (240 Vac, 91 W)
Starting current limiter	< 30 A, NTC
Switch-on time	<0.5 s (100 Vac) / <0.2 s (230 Vac)
Power factor	0.5
Input fuse internal	4 A
Recommended back-up fuse (circuit breaker)	6 A, 10 A, 16 A, characteristic B, C
Mains buffering (rated load)	>15 ms (100 Vac) / >80 ms (230 Vac)
Transient surge voltage protection	varistor
Output	
Output rated voltage	24 Vdc
Output voltage range	23 - 28.5 Vdc (> 24 Vdc constant capacity)
Output rated current	3.8 A / NEC Class 2
Output limited current	3.8 ... 3.2 A (constant current, Class 2)
Class 2 output (UL Limited Power Source, LPS)	Yes
Parallel connection	Yes
Serial operation	Yes
Power dissipation, no load/rated load	2.8 W / 14 W (230 Vac)
Max. power losses	<20 W (100 Vac / 91 W)
Ripple factor	typ. 20mVss
Resistance to reverse feed max.	35 Vdc
Over-voltage-protection	max. 40 Vdc
Efficiency	87 %
Signaling	
Status indicator	LED green Uout > typ. 21.5 Vdc LED lit permanently
Signal output	Active high signal Uout > typ. 21.5 Vdc max. 20 mA@24 Vdc short circuit proof
Approvals	
Approvals	cURus, cULus, GL
Environment	
Storage temperature	-13 °F to +185 °F
Ambient temperature	-13 °F to +158 °F
Derating	-3 %/K > +122 °F
Mounting position	horizontal for standard rail DIN TS35
Type of cooling	Natural convection
Required minimum spacing (left/right)	0.00 inch
Required minimum spacing (over/under)	1.97 inch
Safety and protection	
Protection index	IP 20
Safety class	II, without PE connection
Order numbers	
Order Number	<b>PM-0124-038-0</b>

Type	PM-0124-038-0
<b>Mechanical data</b>	
Terminal and mounting	
Terminals input (direct plug-in technology Push-in)	max 2,5 mm <sup>2</sup>
Terminals output (direct plug-in technology Push-in)	max 2,5 mm <sup>2</sup>
Terminals signalling (direct plug-in technology Push-in)	max 2,5 mm <sup>2</sup>
Measures and weights	
Weight	0.86 lbs

### Dimensions in inch

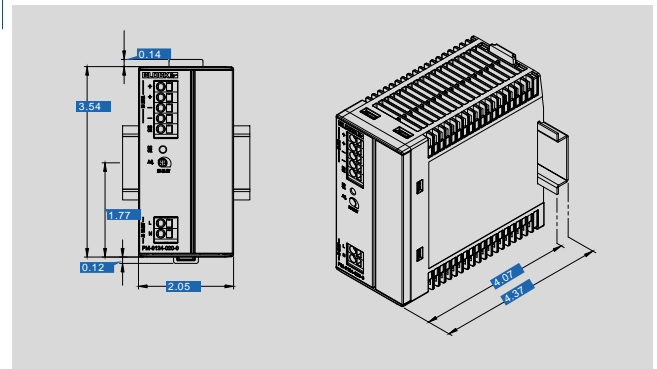

Subject to change.