



Shielded Power Inductors – MSS6132



- 6.1 × 6.1 mm footprint; 3.2 mm high shielded inductors
- Low DCR and excellent current handling

Designer's Kit C364 contains 3 of each value

Core material Ferrite

Core and winding loss See www.coilcraft.com/coreloss

Terminations RoHS compliant matte tin over nickel over phos bronze (current production) or gold over nickel over phos bronze (prior production). Other terminations available at additional cost.

Weight 0.33 – 0.38 g

Ambient temperature –40°C to +85°C with (40°C rise) Irms current.

Maximum part temperature +125°C (ambient + temp rise). [Derating](#).

Storage temperature Component: –40°C to +125°C.

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 500/7" reel, 1500/13" reel; Plastic tape: 16 mm wide, 0.3 mm thick, 12 mm pocket spacing, 3.1 mm pocket depth

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

Part number ¹	Inductance ² ±20% (µH)	DCR max (Ohms)	SRF typ ³ (MHz)	Isat (A) ⁴			Irms (A) ⁵	
				10% drop	20% drop	30% drop	20°C rise	40°C rise
MSS6132-472ML	4.7	0.043	65.0	2.18	2.60	2.84	2.30	3.10
MSS6132-562ML	5.6	0.048	60.0	2.10	2.50	2.74	2.20	2.95
MSS6132-682ML	6.8	0.052	47.0	1.80	2.12	2.30	2.10	2.80
MSS6132-822ML	8.2	0.055	45.0	1.78	2.06	2.22	2.00	2.65
MSS6132-103ML	10	0.070	39.0	1.36	1.64	1.84	1.90	2.50
MSS6132-123ML	12	0.079	33.0	1.30	1.54	1.70	1.75	2.35
MSS6132-153ML	15	0.106	27.0	1.16	1.42	1.56	1.65	2.20
MSS6132-183ML	18	0.118	24.0	1.04	1.22	1.36	1.55	2.05
MSS6132-223ML	22	0.158	21.0	0.97	1.12	1.22	1.45	1.90
MSS6132-273ML	27	0.180	19.0	0.91	1.08	1.18	1.30	1.75
MSS6132-333ML	33	0.250	18.0	0.81	0.96	1.10	1.20	1.60
MSS6132-393ML	39	0.275	17.0	0.79	0.92	0.99	1.10	1.45
MSS6132-473ML	47	0.300	16.0	0.72	0.86	0.93	0.95	1.30
MSS6132-563ML	56	0.380	14.0	0.61	0.72	0.79	0.85	1.15
MSS6132-683ML	68	0.410	12.0	0.55	0.63	0.69	0.73	1.00
MSS6132-823ML	82	0.510	10.0	0.53	0.62	0.67	0.60	0.85
MSS6132-104ML	100	0.660	9.0	0.45	0.54	0.59	0.50	0.69

SPICE models
ON OUR WEB SITE

1. Please specify **termination** and **packaging** codes:

MSS6132-823MLC

Termination: L = RoHS compliant matte tin over nickel over phos bronze (current production) or gold over nickel over phos bronze (prior production)

Special order:

T = RoHS tin-silver-copper

(95.5/4/0.5) over gold over nickel over phos bronze or

S = non-RoHS tin-lead (63/37) over

gold over nickel over phos bronze.

Packaging: **C** = 7" machine-ready reel EIA-481 embossed plastic tape (500 per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).

D = 13" machine-ready reel EIA-481 embossed plastic tape. Factory order only, not stocked (1500 per reel per full reel).

B = Less than full reel Less than full reel.

In an effort to simplify our part numbering system, Coilcraft is eliminating the need for multiple packaging codes.

When ordering, simply change the last letter of your part number from B to C.

2. Inductance tested at 100 kHz, 0.1 Vrms, 0 Adc using an Agilent/HP 4263B LCR meter or equivalent.
3. SRF measured using Agilent/HP 4191A or equivalent.
4. DC current at which the inductance drops the specified amount from its value without current.
5. DC current at 25°C that causes the specified inductance drop from its value without current.
[Click for temperature derating information.](#)
6. Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings. [Click for temperature derating information.](#)
7. Electrical specifications at 25°C.
Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com

UK +44-1236-730595 sales@coilcraft-europe.com

Taiwan +886-2-2264 3646 sales@coilcraft.com.tw

China +86-21-6218 8074 sales@coilcraft.com.cn

Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 641-1 Revised 09/02/15


© Coilcraft Inc. 2020

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.





SMT Power Inductors – MSS6132

Typical L vs Current

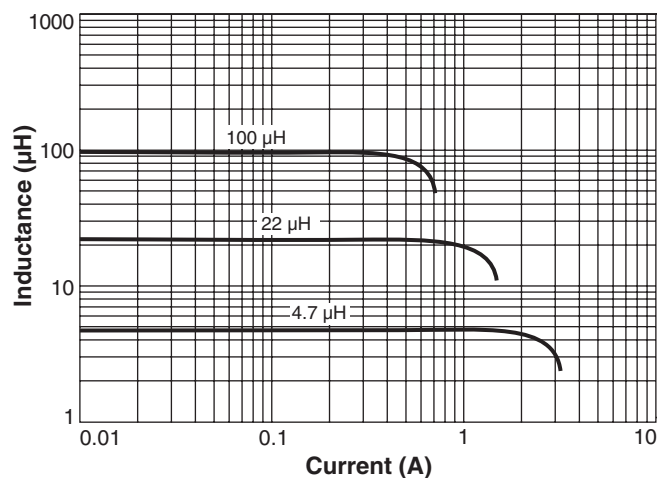

Typical L vs Frequency

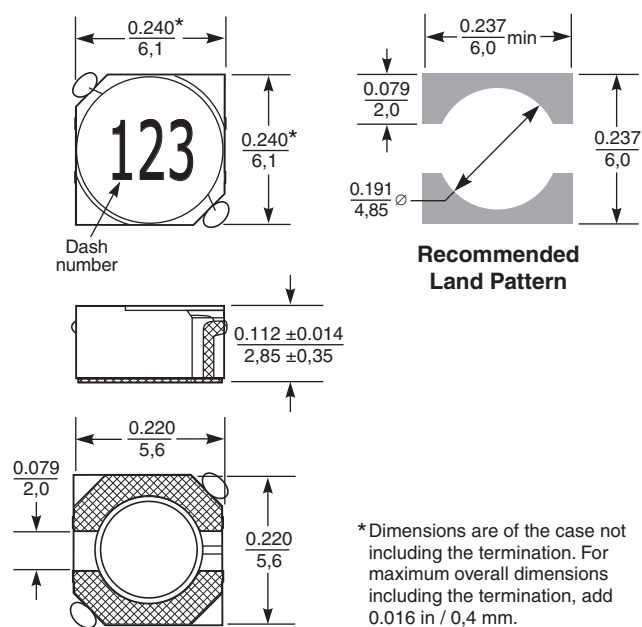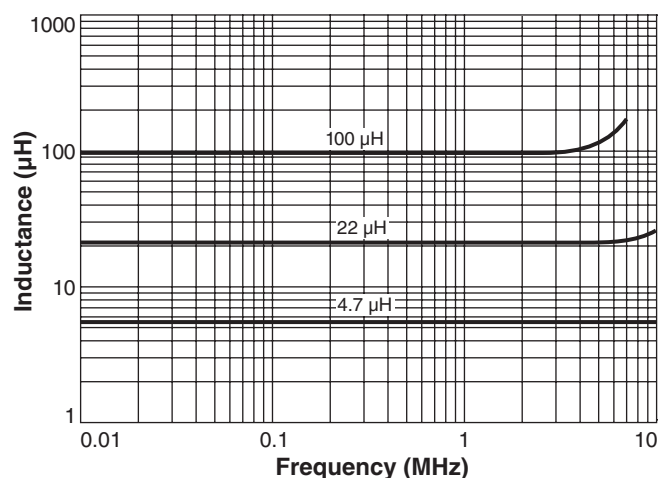

*Dimensions are of the case not including the termination. For maximum overall dimensions including the termination, add 0.016 in / 0,4 mm.

Dimensions are in $\frac{\text{inches}}{\text{mm}}$