

CentralTM Semiconductor Corp.

145 Adams Ave., Hauppauge, NY 11788 USA

Phone (631) 435-1110 FAX (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

www.centrasemi.com

C103Y
C103YY
C103A
C103B

SILICON CONTROLLED RECTIFIER
0.8 AMP, 30 THRU 200 VOLTS

TO-92 CASEDESCRIPTION

The CENTRAL SEMICONDUCTOR C103 Series types are Epoxy Molded Silicon Controlled Rectifiers designed for control systems and sensing circuit applications.

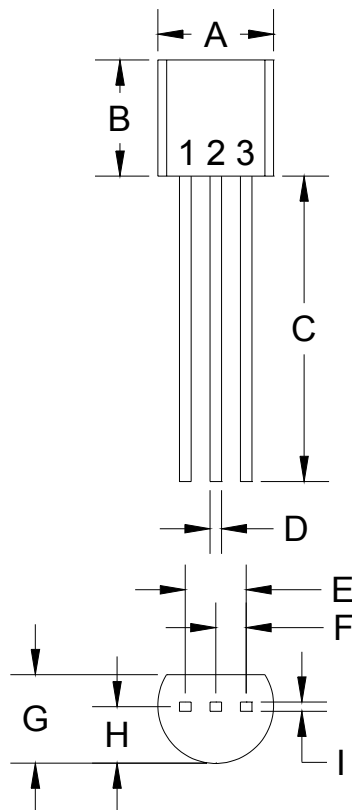
MAXIMUM RATINGS ($T_C=25^\circ\text{C}$ unless otherwise noted)

	<u>SYMBOL</u>	<u>C103Y</u>	<u>C103YY</u>	<u>C103A</u>	<u>C103B</u>	<u>UNITS</u>
Peak Repetitive Off-State Voltage	V_{DRM}, V_{RRM}	30	60	100	200	V
RMS On-State Current ($T_C=60^\circ\text{C}$)	$I_{T(RMS)}$		0.8			A
Peak One Cycle Surge	I_{TSM}		8.0			A
Peak Forward Gate Current	I_{GM}		0.5			A
Peak Reverse Gate Voltage	V_{GM}		8.0			V
Peak Gate Power Dissipation ($t_p=8.3\text{ms}$)	P_{GM}		1.0			W
Average Gate Power Dissipation	$P_{G(AV)}$		0.01			W
Storage Temperature	T_{stg}		-65 to +150			$^\circ\text{C}$
Junction Temperature	T_J		-65 to +125			$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$ unless otherwise noted)

<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>MIN</u>	<u>TYP</u>	<u>MAX</u>	<u>UNITS</u>
I_{DRM}, I_{RRM}	Rated $V_{DRM}, V_{RRM}, R_{GK}=1\text{K}\Omega$			1.0	μA
I_{DRM}, I_{RRM}	Rated $V_{DRM}, V_{RRM}, T_C=125^\circ\text{C}, R_{GK}=1\text{K}\Omega$			50	μA
I_{GT}	$V_D=6.0\text{V}, R_L=100\Omega, R_{GK}=1\text{K}\Omega$			200	μA
I_{GT}	$V_D=6.0\text{V}, R_L=100\Omega, R_{GK}=1\text{K}\Omega, T_C=-65^\circ\text{C}$			500	μA
I_H	$R_{GK}=1\text{K}\Omega$			5.0	mA
I_H	$R_{GK}=1\text{K}\Omega, T_C=-65^\circ\text{C}$			10	mA
V_{GT}	$V_D=6.0\text{V}, R_L=100\Omega$			0.8	V
V_{GT}	$V_D=6.0\text{V}, R_L=100\Omega, T_C=-65^\circ\text{C}$			1.0	V
V_{GT}	$V_D=6.0\text{V}, R_L=1\text{K}\Omega, T_C=125^\circ\text{C}$	0.1			V
V_{TM}	$I_{TM}=1.0\text{A}$			1.5	V
dv/dt	$V_D=V_{DRM}, T_C=125^\circ\text{C}, R_{GK}=1\text{K}\Omega$		20		V/ μs

(SEE REVERSE SIDE)

TO-92 PACKAGE - MECHANICAL OUTLINE

R1

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.175	0.205	4.45	5.21
B	0.170	0.210	4.32	5.33
C	0.500	-	12.70	-
D	0.016	0.022	0.41	0.56
E	0.100		2.54	
F	0.050		1.27	
G	0.125	0.165	3.18	4.19
H	0.080	0.105	2.03	2.67
I	0.015		0.38	

TO-92 (REV: R1)

Lead Code: 1) Anode
 2) Gate
 3) Cathode

Central[™]
Semiconductor Corp.

145 Adams Ave., Hauppauge, NY 11788 USA
 Phone (631) 435-1110 FAX (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

www.centrasemi.com

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms