

PN4391
PN4392
PN4393

**SILICON
N-CHANNEL JFETS**



TO-92 CASE



www.centralemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR PN4391 series devices are N-Channel silicon JFETs designed for analog switching and chopper applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^{\circ}\text{C}$)

Gate-Drain Voltage
Gate-Source Voltage
Gate Current
Power Dissipation
Operating and Storage Junction Temperature

SYMBOL

V_{GD} 40
 V_{GS} 40
 I_G 50
 P_D 625
 T_J, T_{stg} -65 to +150

UNITS

V
V
mA
mW
 $^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	PN4391		PN4392		PN4393		UNITS
		MIN	MAX	MIN	MAX	MIN	MAX	
I_{GSS}	$V_{GS}=20\text{V}$	-	0.1	-	0.1	-	0.1	nA
I_{GSS}	$V_{GS}=20\text{V}, T_A=100^{\circ}\text{C}$	-	0.2	-	0.2	-	0.2	μA
I_{DSS}	$V_{DS}=20\text{V}$	50	150	25	75	5.0	30	mA
$I_D(\text{OFF})$	$V_{DS}=20\text{V}, V_{GS}=12\text{V}$	-	0.1	-	-	-	-	nA
$I_D(\text{OFF})$	$V_{DS}=20\text{V}, V_{GS}=7.0\text{V}$	-	-	-	0.1	-	-	nA
$I_D(\text{OFF})$	$V_{DS}=20\text{V}, V_{GS}=5.0\text{V}$	-	-	-	-	-	0.1	nA
$I_D(\text{OFF})$	$V_{DS}=20\text{V}, V_{GS}=12\text{V}, T_A=100^{\circ}\text{C}$	-	0.2	-	-	-	-	μA
$I_D(\text{OFF})$	$V_{DS}=20\text{V}, V_{GS}=7.0\text{V}, T_A=100^{\circ}\text{C}$	-	-	-	0.2	-	-	μA
$I_D(\text{OFF})$	$V_{DS}=20\text{V}, V_{GS}=5.0\text{V}, T_A=100^{\circ}\text{C}$	-	-	-	-	-	0.2	μA
BV_{GSS}	$I_G=1.0\mu\text{A}$	40	-	40	-	40	-	V
$V_{GS}(\text{OFF})$	$V_{DS}=20\text{V}, I_D=1.0\text{nA}$	4.0	10	2.0	5.0	0.5	3.0	V
$V_{GS}(f)$	$V_{DS}=0, I_G=1.0\text{mA}$	-	1.0	-	1.0	-	1.0	V
$V_{DS}(\text{ON})$	$I_D=12\text{mA}$	-	0.4	-	-	-	-	V
$V_{DS}(\text{ON})$	$I_D=6.0\text{mA}$	-	-	-	0.4	-	-	V
$V_{DS}(\text{ON})$	$I_D=3.0\text{mA}$	-	-	-	-	-	0.4	V
$r_{DS}(\text{ON})$	$I_D=1.0\text{mA}, V_{GS}=0$	-	30	-	60	-	100	Ω
$r_{ds}(\text{on})$	$V_{GS}=0, I_D=0, f=1.0\text{kHz}$	-	30	-	60	-	100	Ω
C_{rss}	$V_{GS}=12\text{V}, V_{DS}=0, f=1.0\text{MHz}$	-	3.5	-	-	-	-	pF
C_{rss}	$V_{GS}=7.0\text{V}, V_{DS}=0, f=1.0\text{MHz}$	-	-	-	3.5	-	-	pF
C_{rss}	$V_{GS}=5.0\text{V}, V_{DS}=0, f=1.0\text{MHz}$	-	-	-	-	-	3.5	pF
C_{iss}	$V_{DS}=20\text{V}, V_{GS}=0, f=1.0\text{MHz}$	-	14	-	14	-	14	pF

R4 (16-November 2020)

PN4391
PN4392
PN4393


SILICON
N-CHANNEL JFETS



ELECTRICAL CHARACTERISTICS - Continued: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	PN4391		PN4392		PN4393		UNITS
		MIN	MAX	MIN	MAX	MIN	MAX	
t_r	$I_{D(ON)}=12\text{mA}$	-	5.0	-	-	-	-	ns
t_r	$I_{D(ON)}=6.0\text{mA}$	-	-	-	5.0	-	-	ns
t_r	$I_{D(ON)}=3.0\text{mA}$	-	-	-	-	-	5.0	ns
t_f	$V_{GS(OFF)}=12\text{V}$	-	15	-	-	-	-	ns
t_f	$V_{GS(OFF)}=7.0\text{V}$	-	-	-	20	-	-	ns
t_f	$V_{GS(OFF)}=5.0\text{V}$	-	-	-	-	-	30	ns
t_{on}	$I_{D(ON)}=12\text{mA}$	-	15	-	-	-	-	ns
t_{on}	$I_{D(ON)}=6.0\text{mA}$	-	-	-	15	-	-	ns
t_{on}	$I_{D(ON)}=3.0\text{mA}$	-	-	-	-	-	15	ns
t_{off}	$V_{GS(OFF)}=12\text{V}$	-	20	-	-	-	-	ns
t_{off}	$V_{GS(OFF)}=7.0\text{V}$	-	-	-	35	-	-	ns
t_{off}	$V_{GS(OFF)}=5.0\text{V}$	-	-	-	-	-	50	ns

TO-92 CASE - MECHANICAL OUTLINE

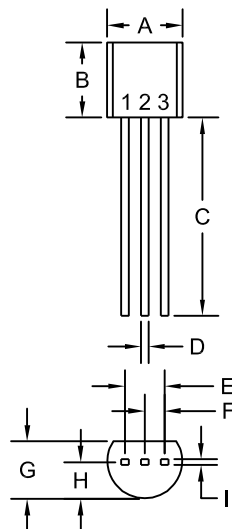

R1

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.175	0.205	4.45	5.21
B	0.170	0.210	4.32	5.33
C	0.500	-	12.70	-
D	0.016	0.022	0.41	0.56
E	0.100		2.54	
F	0.050		1.27	
G	0.125	0.165	3.18	4.19
H	0.080	0.105	2.03	2.67
I	0.015		0.38	

TO-92 (REV: R1)

LEAD CODE:

- 1) Drain
- 2) Source
- 3) Gate

MARKING: FULL PART NUMBER

R4 (16-November 2020)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms