

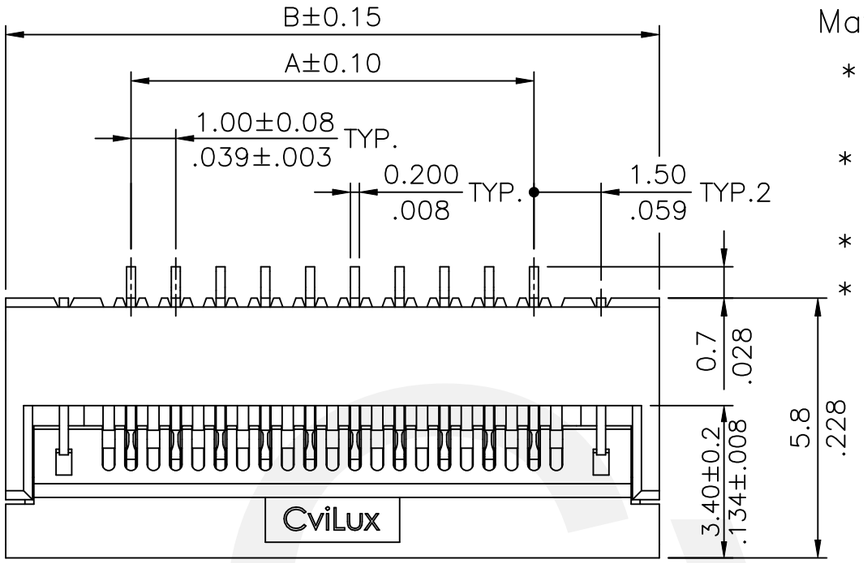


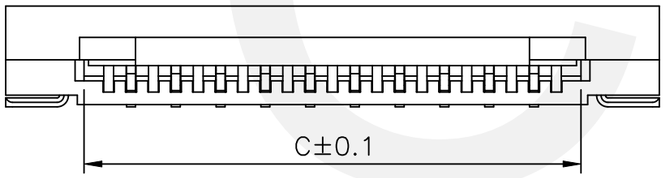


Material :

* Body : Nylon 6T With 30% GF. UL 94V-0, Color Nature
* Slider : Nylon 6T With 30% GF. UL 94V-0, Color Black
* Contact : Phosphor Bronze
* Fixed tab : Brass with Matte Tin Plated

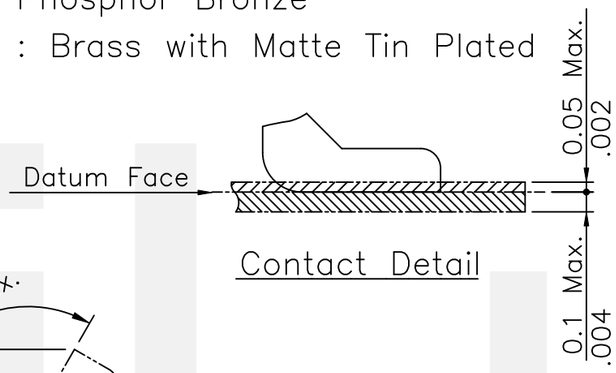

Contact Detail

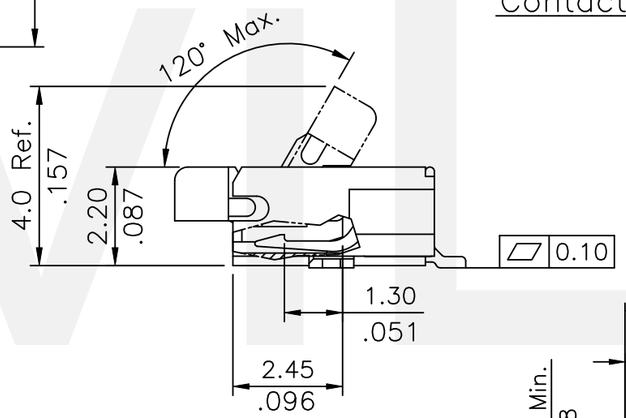


DIM.A = 1.00 x No. of Spaces


DIM.B = DIM.A + 5.6

DIM.C = DIM.A + 2.1

⑤⑥* Available in 3 through 32 circuits

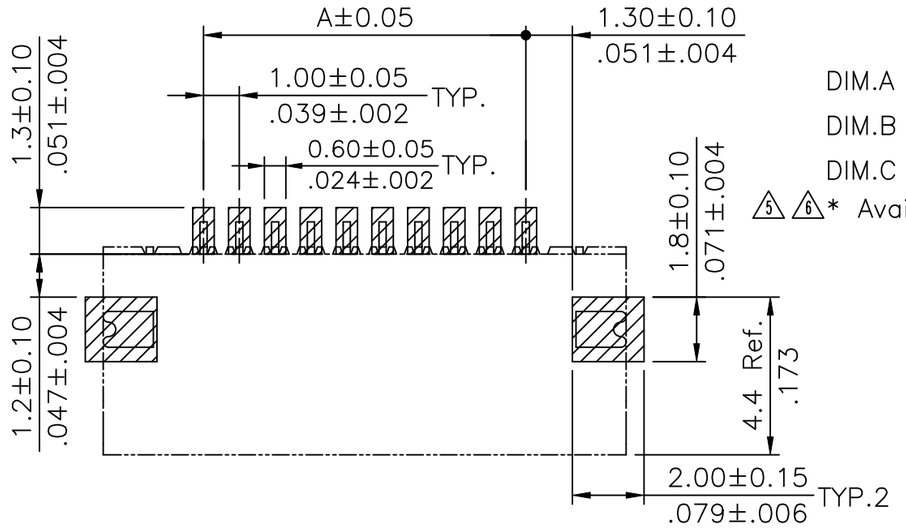

Recommended P.C. Board Layout

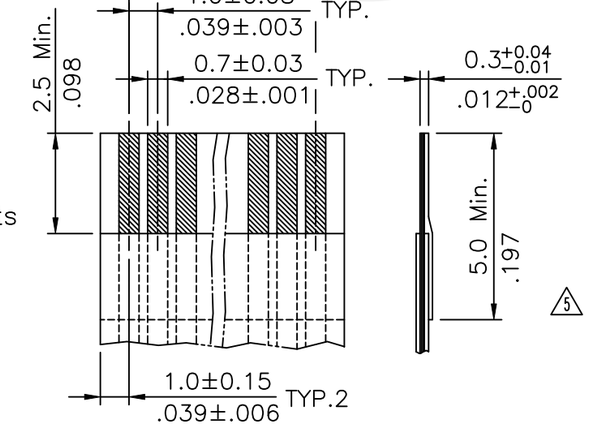

Accommodated FFC/FPC

Ordering Code

CF25 ** * D 0 *0 - 10 -NH

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② No. of Circuits

③ Plating code:
1= Matte Tin plated over Nickel
2= Gold flash over 50μ" min. Nickel


④ Contact style: D= Downside contact

⑤ Color: 0= Nature

⑥ Other option: R0= Tape & Reel
T0= Tube Packing

⑦ Pitch: 10= 1.00 mm

⑧ -NH= For Lead Free Reflow Processes and Halogen-Free

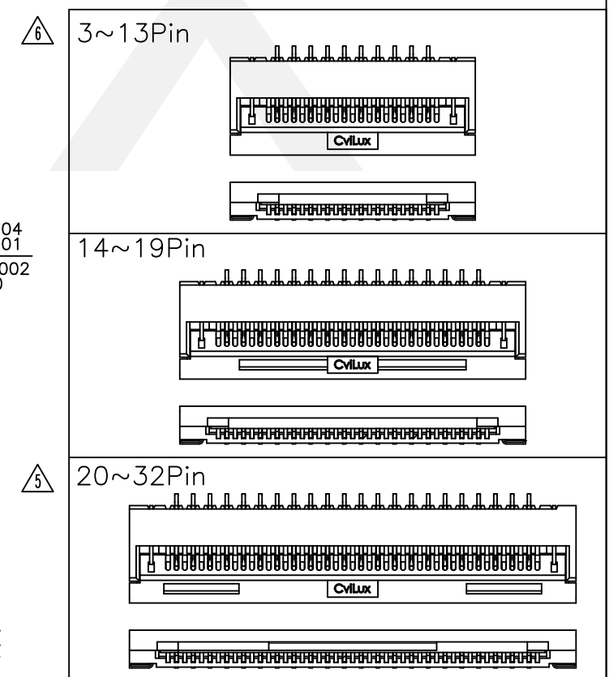


Halogen-Free | Lead Free Process | RoHS Compliant

⑥	Sun	4/08-26'	ECNT126066			DATE	UNIT: mm / inch	TITLE: 1.00mm(.039") ZIF FFC/FPC ONE-TOUCH CONNECTOR
⑤	Karen	3/14-22'	ECNT122032/ECRB122004	DRAWN BY:	Sun	4/15-26'	TOLERANCE UNLESS OTHERWISE SPECIFIED	
④	Sandy	3/8-16'	ECNT116028/ECRB116002	ENGINEER:	Sun	4/15-26'	.X ± 0.15/.006 X.° ± 1°	MATERIAL:
③	Enya	11/06-12'	ECN12272-0/ECR12080-1	CHECKED BY:	Eisley	4/15-26'	.XX ± 0.10/.004 .X° ±	FINISH:
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	4/15-26'	.XXX ± 0.05/.002 .XX° ±	

CviLux Corp 2026-04-17 ISSUED

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CF2519SG	PART NO.	CF25***D0*0-10-NH
SCALE	5 / 1	SHEET 1 OF 2	

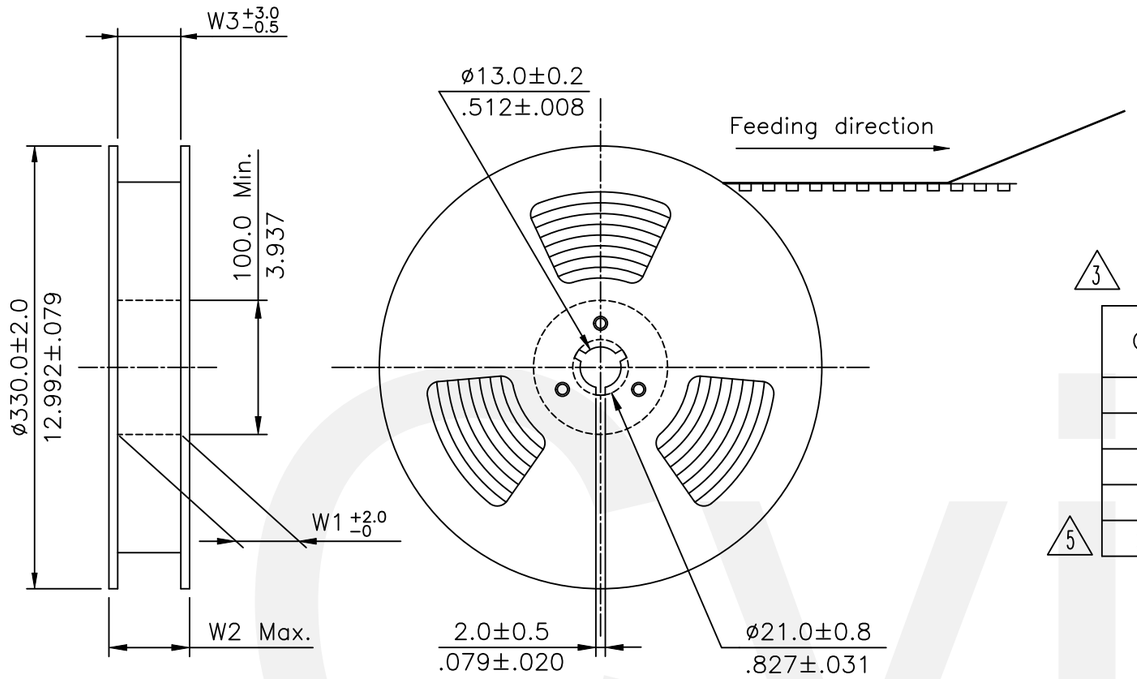



NOTES:

1. 10 sprocket hole pitch cumulative tolerance ±0.20
2. Carrier camber is within 1 mm in 250 mm.
3. Material :Transparent Anti−static Polysyrene.
4. All dimensions meet EIA−481−* requirements.
5. Thickness : 0.35±0.05mm.
6. Quantity : 2000 PCS/Reel


△3 △4

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
3,4	16.0(.630)	—	16.5(.650)	22.5(.885)	16.5(.650)	11
5−12	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9
13−16	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
17−28	44.0(1.732)	40.40(1.596)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
△5 29−32	56.0(2.204)	52.50(2.067)	56.5(2.224)	62.5(2.460)	56.5(2.224)	4

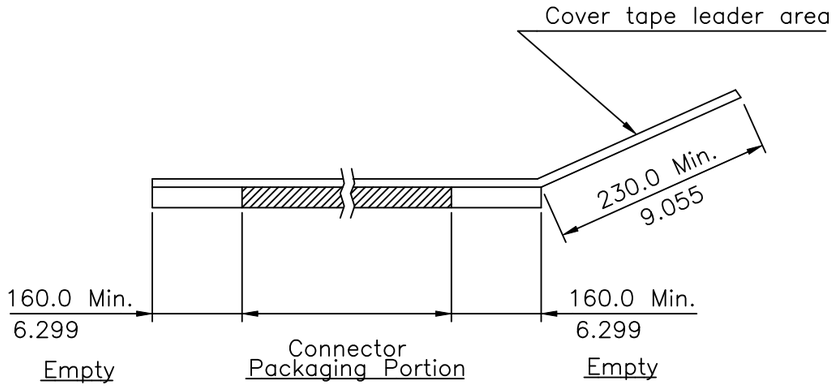

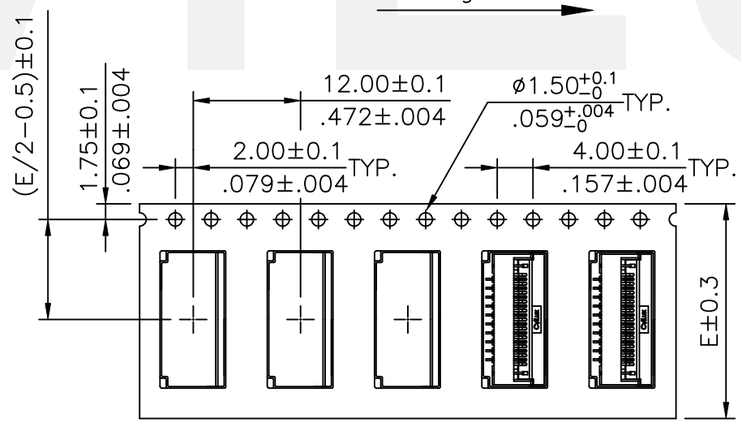

WIDTH : 16,24 mm Carrier

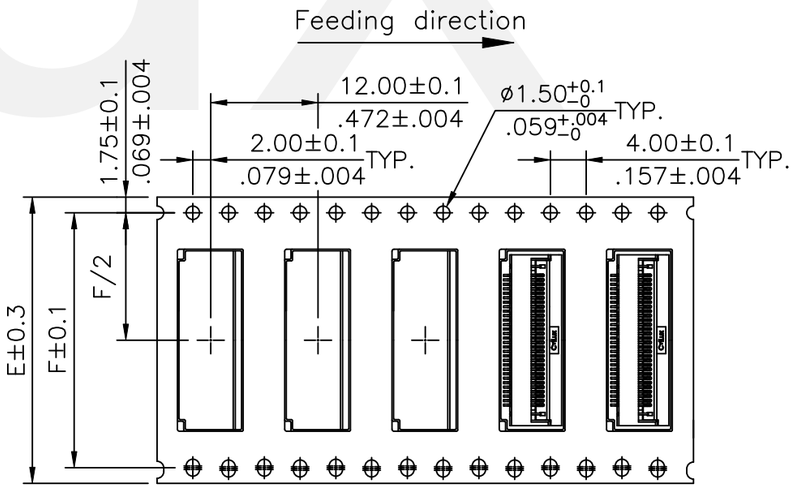

WIDTH : 32,44,56 mm Carrier

RoHS Compliant

SYM	NAME	DATE	REVISIONS
△6	Sun	4/08−26'	ECNT126066
△5	Karen	3/14−22'	ECNT122032/ECRB122004
△4	Sandy	3/8−16'	ECNT116028/ECRB116002
△3	Enya	11/06−12'	ECN12272−0/ECR12080−1

CviLux Corp. 2026-04-17 ISSUED

		DATE
DRAWN BY:	Sun	4/15−26'
ENGINEER:	Sun	4/15−26'
CHECKED BY:	Eisley	4/15−26'
APPROVED BY:	Eisley	4/15−26'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±	X.° ± 1°
.XX ±	.X° ±
.XXX ±	.XX° ±

TITLE: 1.00mm(.039") ZIF FFC/FPC ONE−TOUCH CONNECTOR

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CF2519SG	PART NO.	CF25**1D0*0−10−NH
SCALE		SHEET 2 OF 2	