

The history of revision change for the specification

Document	REV.	Modified date	Description
CYNVC-175-013	A0	2017.5.22	New approval
CYNVC-175-013	A1	2017.6.19	1. Add spec of R78, 1R0, 3R3 2. Add curve of R78, 1R0, 3R3 3. May -> Jun.
CYNVC-175-013	A2	2017.11.3	1. Jun. -> Nov. 2. Add spec of R47 3. Add curve of R47
CYNVC-175-013	A3	2018.3.13	1. Add "AEC-Q200" logo on page 2 2. Nov., 2017 -> Mar., 2018 3. Year code 2017 = 7 -> 2018 = 8
CYNVC-175-013	A4	2018.10.19	1. Mar. -> Oct. 2. Remove spec of R78 3. Remove curve of R78
CYNVC-175-013	A5	2019.6.14	1. Add R78 spec & curve 2. Oct., 2018 -> Jun., 2019 3. Year code 2018 = 8 -> 2019 = 9
CYNVC-175-013	A6	2020.1.13	1. Jun., 2019 -> Jan., 2020 2. Remove frequency: (1MHz) from Features 3. Year code 2019 = 9 -> 2020 = 0 4. Add R19 spec & curve 5. Add Rated voltage (V): 75V

Power Choke Coil VCMT104T MN5 type

AEC-Q200


■ Features

- High performance (Isat) realized by metal dust core.
- Low profile : Thickness max. 4.0mm
- Low loss realized with low DCR
- Capable of corresponding high frequency
- Compliance with RoHS and Halogen Free
- AEC-Q200 qualified

■ Application

Automotive applications


■ Outline Dimensions

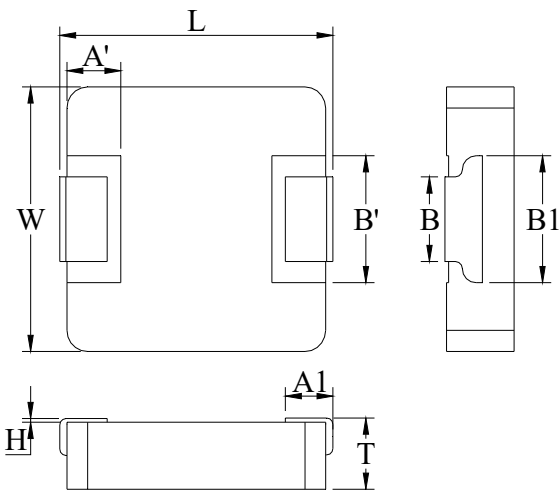

Code	Dimensions (mm)
L	10.85 ± 0.35
W	10.0 ± 0.3
T	3.8 ± 0.2
A1	2.6 ± 0.5
A'	2.5 ± 0.1
B	4.5 ± 0.3
B1	6.5 ± 0.3
B'	6.0 ± 0.3
H	0 ~ + 0.15

■ Recommend Land Pattern Dimensions

The customer shall determine the land dimensions shown below after confirming and safety.

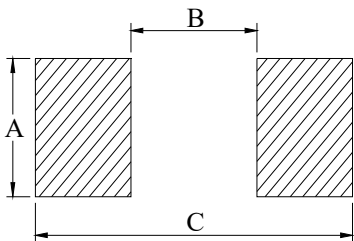

A	4.95
B	5.4
C	13.6

Unit : mm

■ Marking and Date Code

The point on the top surface represents winding direction of choke.

(1) Marking

The inductor is marked with a 3-digit code

Example -- 22.0 μ H → 220

(2) Date Code

X XX
(1) (2)
XXX
(3)

Where (1) Year Code


Ex : 2020 = 0

(2) Weekly Code

Serial number : 01 ~ 53

(3) Taping No.

Serial number : 001 ~ ZZZ

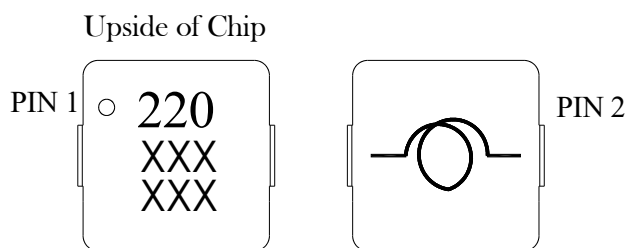

Coil clockwise around

Specifications

Part Number	L0 ◇ Inductance (μ H) @ (0A)	R _{dc} (m Ω) ◇		Heat Rating Current DC Amps. Idc (A)	Saturation Current DC Amps. Isat (A)	Rated Voltage (V)
		Typical	Maximum	Typical	Typical	Maximum
VCMT104T-R19MN5	0.19	0.96	1.15	34.0	55.0	75
VCMT104T-R47MN5	0.47	1.53	1.68	34.0	21.0	75
VCMT104T-R78MN5	0.78	2.15	2.5	30.0	18.3	75
VCMT104T-1R0MN5	1.0	2.7	3.1	23.0	18.0	75
VCMT104T-3R3MN5	3.3	9.94	11.8	11.0	12.0	75
VCMT104T-4R7MN5	4.7	13.2	15.0	9.8	11.0	75
VCMT104T-6R8MN5	6.8	18.5	21.5	9.1	8.5	75
VCMT104T-8R2MN5	8.2	25.3	29.0	7.7	7.1	75
VCMT104T-100MN5	10.0	28.5	33.0	7.5	6.0	75
VCMT104T-150MN5	15.0	42.5	49.0	6.0	5.4	75
VCMT104T-220MN5	22.0	60.4	68.0	5.0	4.6	75
VCMT104T-330MN5	33.0	89.0	102.0	4.0	3.6	75
VCMT104T-470MN5	47.0	164.0	188.0	3.0	3.2	75

◇ : Significant Characteristic

* : If you require another part number please contact with us.

** : Inductance Tolerance $\pm 20\%$

Note 1. : All test data is referenced to 25°C ambient.

Note 2. : Test Condition: 100KHz, 1.0Vrms

Note 3. : Idc : DC current (A) that will cause an approximate ΔT of 40°C

Note 4. : Isat : DC current (A) that will cause L0 to drop approximately 20%

Note 5. : Operating Temperature Range -55°C to + 155°C









Note 6. : The part temperature (ambient + temp rise) should not exceed 155°C under the worst case operating conditions. Circuit design, component placement, PCB trace size and thickness, airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the end application.






Note 7. : The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Note 8. : Cleaning Process Note

- (a) If this power choke is dipped in the cleaning agent, such as toluene, xylene, ketone, and ether system, there is a possibility that the performance decreases greatly
- (b) The high power ultrasonic washing may damage the choke body.
- (c) Please contact us if you need the cleaning via the above agents or ultrasonic washing.


Current Characteristic

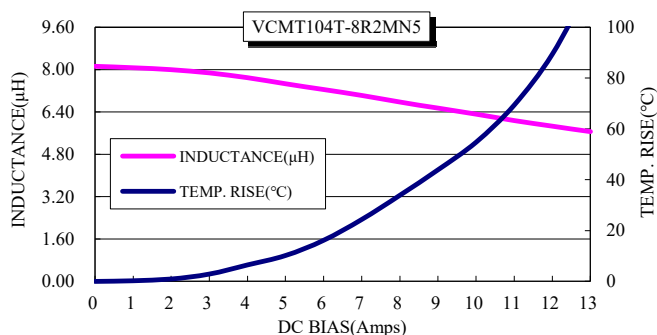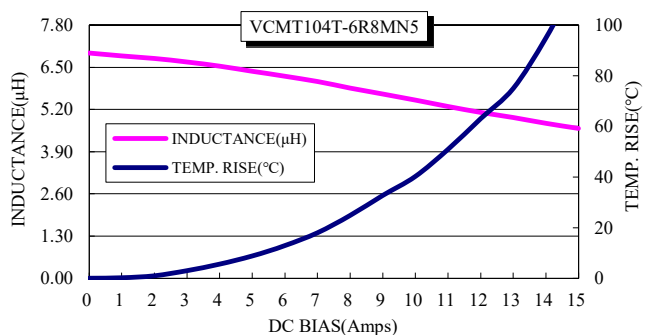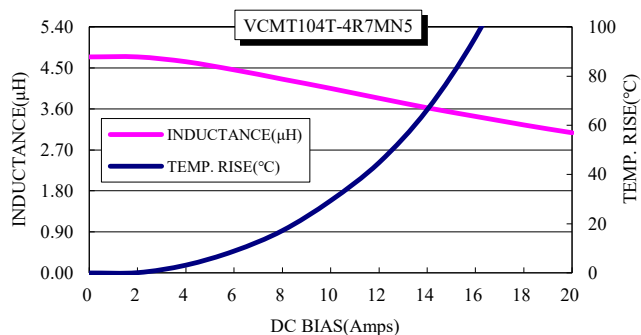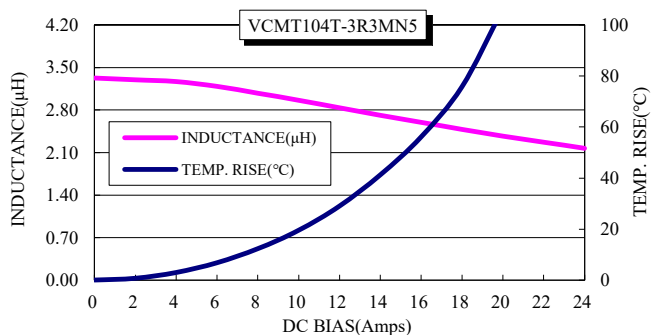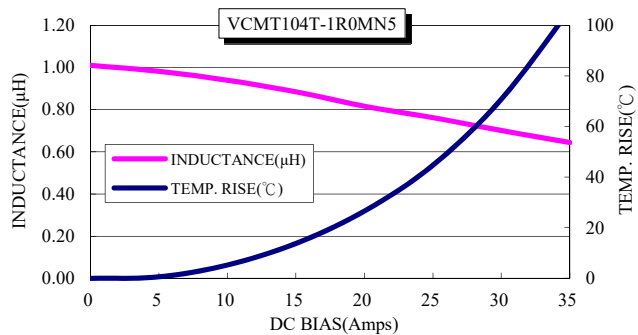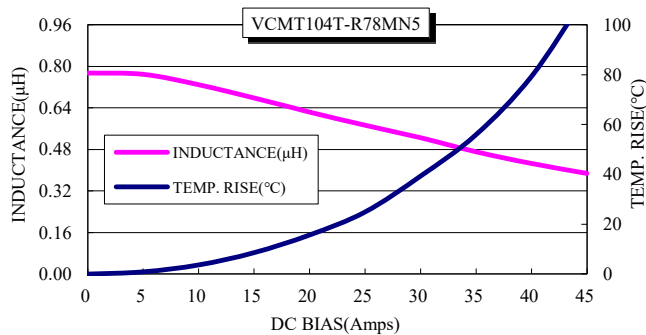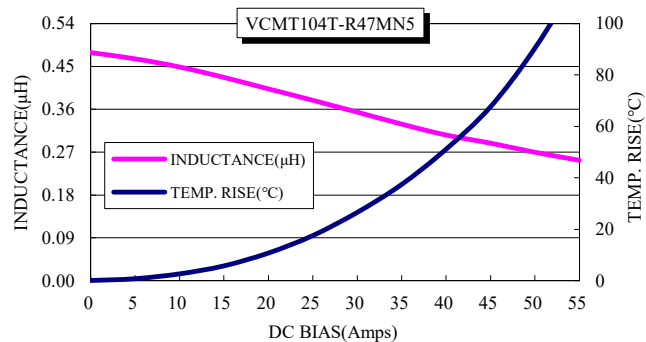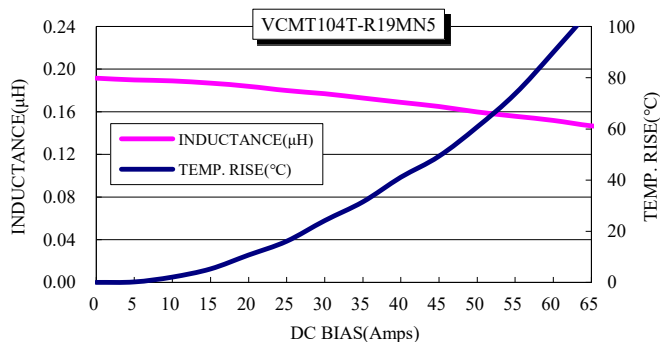

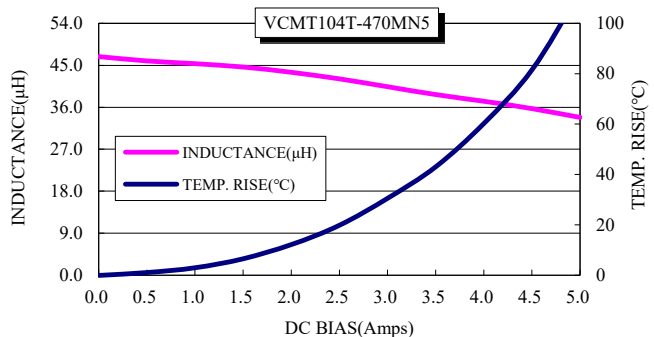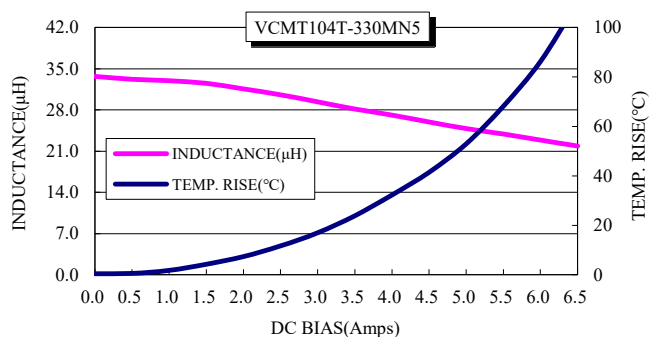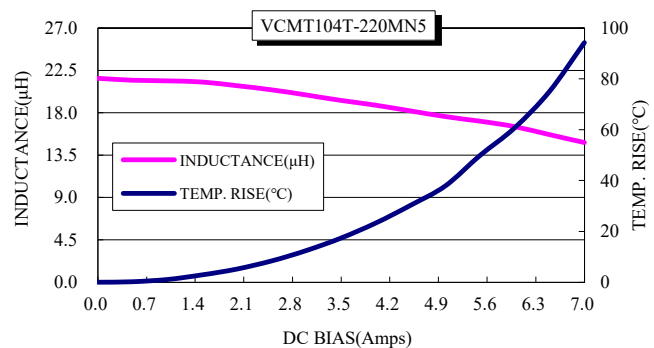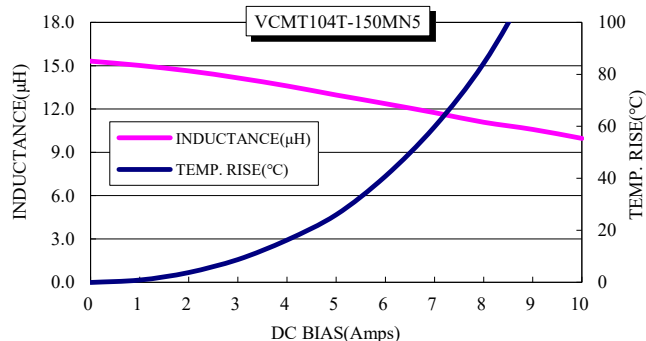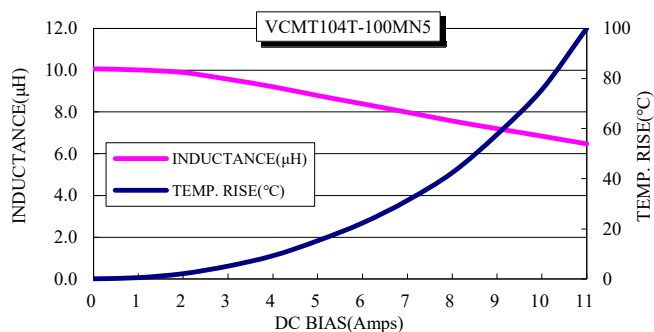

■ Packaging


(1) Tape packaging dimensions

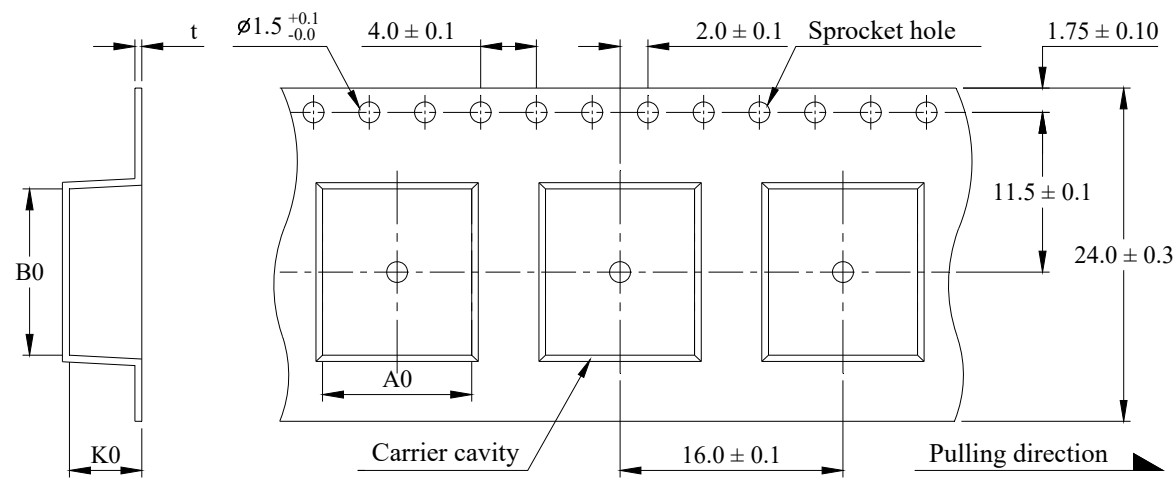


Dimensions Code (mm)				UNITS/REEL
A0	B0	K0	t	
10.7 ± 0.1	12.0 ± 0.1	4.5 ± 0.1	0.35 ± 0.05	500

(2) Tape Direction

The direction shall be seen from the top cover tape side.

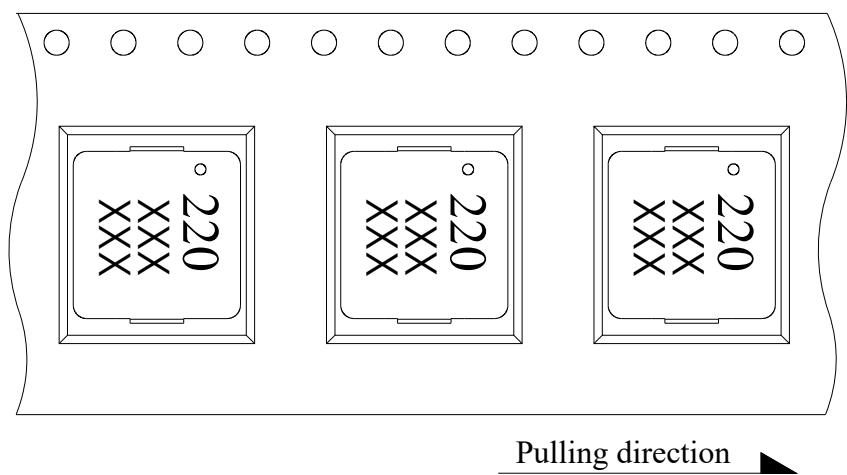


(3) Reel dimensions

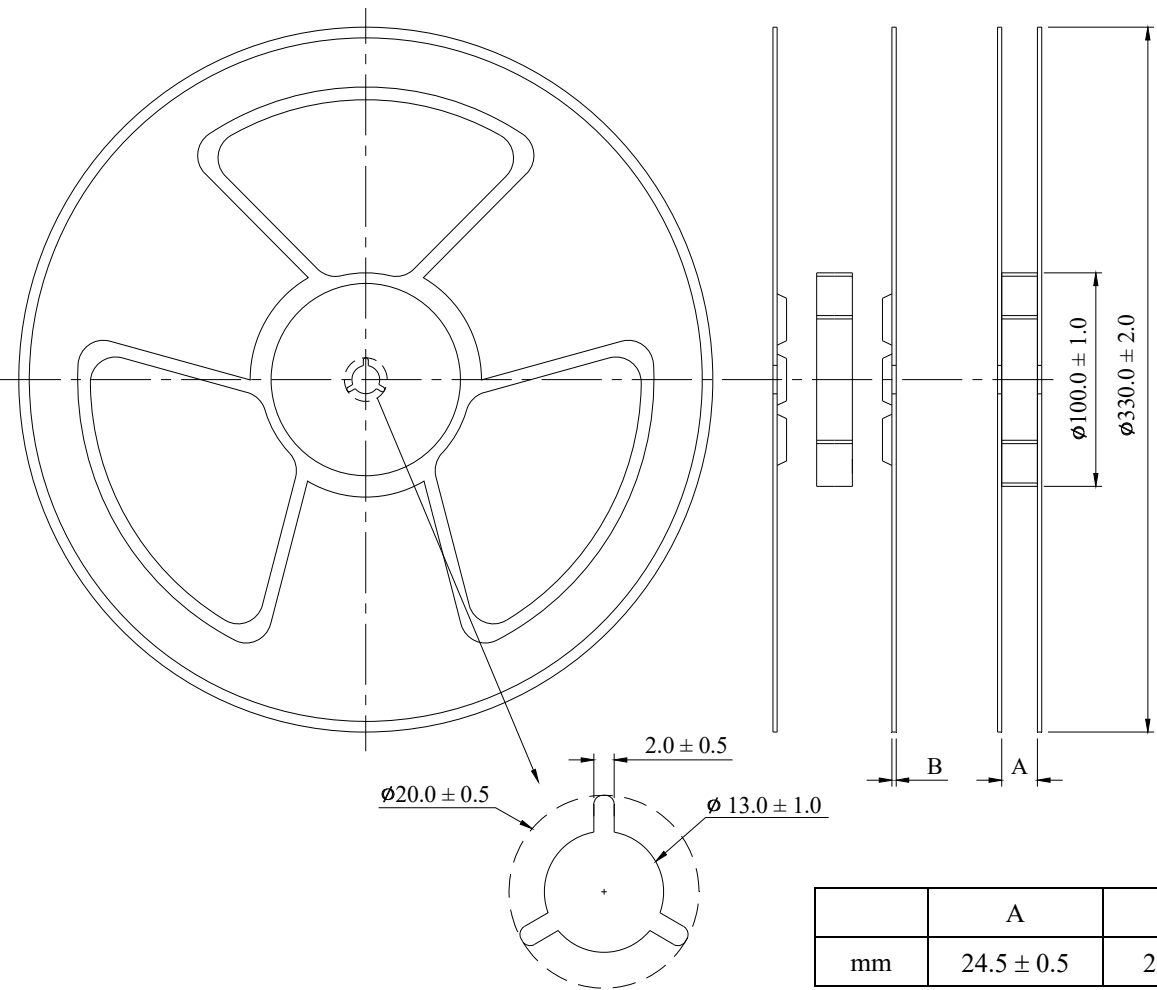


(4) Peel force of top cover tape

The peel speed shall be about 300 mm/minute
The peel force of top cover tape shall be between 0.1 to 1.3N

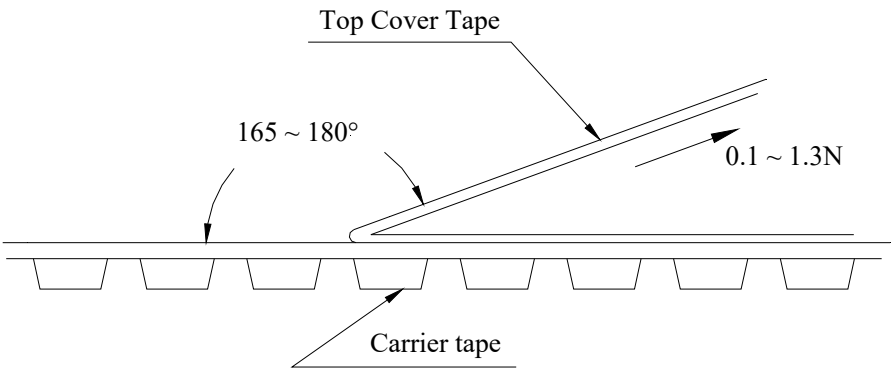

■ Reflow Profile

Power Choke Coil Type

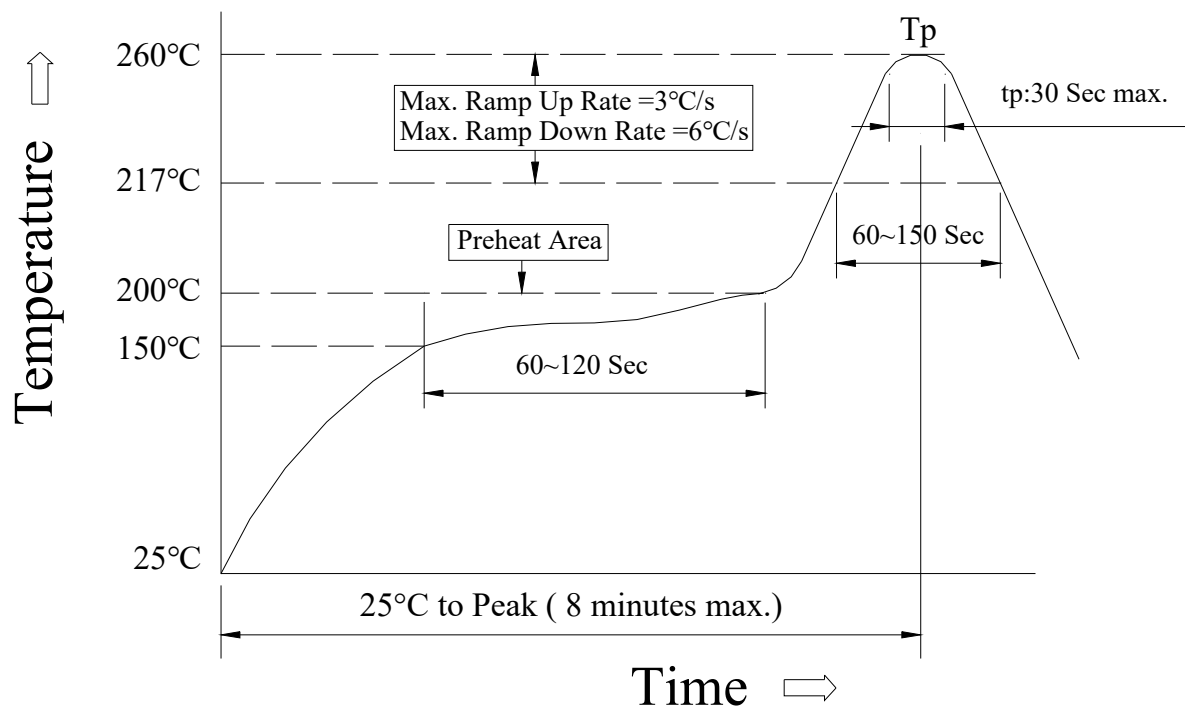

(1) Reflow Soldering Method :

Reflow Soldering	Tp:255~260°C	Max.30 seconds (tp)
	217°C	60~150 seconds
Pre-Heat	150 ~ 200°C	60~120 seconds
Time 25°C to peak temperature	8 minutes max.	

(2) Soldering iron Method : 350± 5°C max.3 seconds