



### Certifications & Ratings

- RoHS compliant
- IP66/IP67
- IK10
- NEMA 4X


### Application

The 621 Series Heavy Duty LED Panel Mount Indicators are elegantly designed for a high-end aesthetic paired with sturdy construction. These indicators are non-magnetic, corrosion resistant for both indoor and outdoor use, and secured to prevent dirt, dust, and water penetration. Ideal for a variety of applications such as:

- Main power indication
- Remote power indication
- Status indication
- Maintenance and warning indication
- Instrumentation
- ... and many more!

### Dimensions

inches [mm]

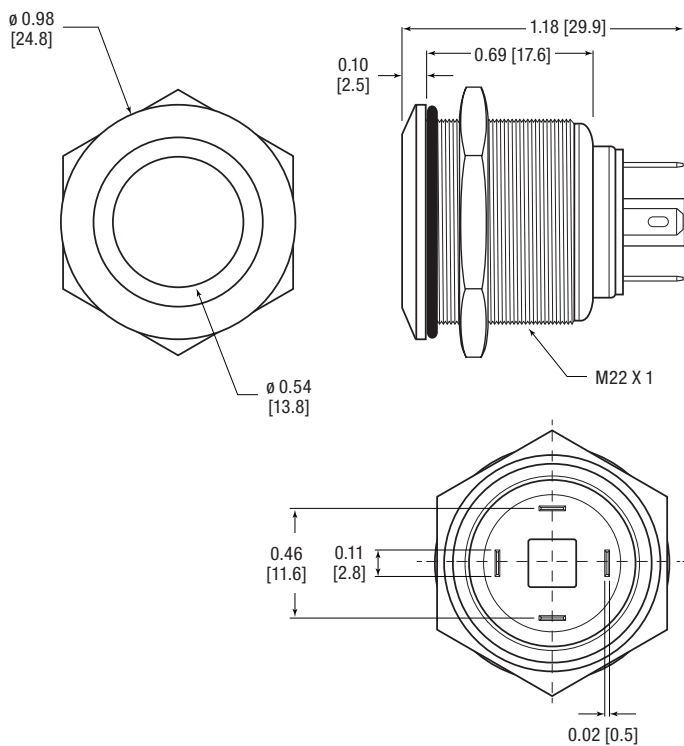

### Mechanical Information

<b>Mounting Hole Size:</b>	0.866" (22mm)
<b>Max Panel Thickness:</b>	0.394" (10mm)
<b>Mounting Torque:</b>	7.01 lbs-ft (9.5 Nm)

### Specifications

<b>Operating Voltage:</b>	3 VDC (external resistor required) 6, 12 & 24 VDC (internal resistor included)
<b>Operating Temp:</b>	-25 °C to +70 °C (-13 °F to 158 °F)
<b>Storage Temp:</b>	-25 °C to +70 °C (-13 °F to 158 °F)
<b>Electrical Connection:</b>	Solder terminals
<b>Housing:</b>	Stainless Steel
<b>Terminals:</b>	Stainless Steel
<b>Nut:</b>	Stainless Steel

## Ordering Information 621 Series

Dialight P/N	Color	Voltage (VDC)	Current (mA)	Typical Intensity (mcd)
--------------	-------	---------------	--------------	-------------------------

### Diffused Lens

621-1121-304F	(TriColor) ● Red ● Green ● Blue	3	15	● Red: 200 ● Green: 250 ● Blue: 300
621-1122-304F		6		
621-1123-304F		12		
621-1124-304F		24		

### Clear Lens

621-1121-314F	(TriColor) ● Red ● Green ● Blue	3	15	● Red: 200 ● Green: 250 ● Blue: 300
621-1122-314F		6		
621-1123-314F		12		
621-1124-314F		24		

### Part Number Guide

6	2	1	-	1	2	X	-	3	X	4	F
						Voltage		Lens			
						1	3VDC	0	Diffused		
						2	6VDC	1	Clear		
						3	12VDC				
						4	24VDC				
Color											
<div><div></div> Red</div>						1	2				
<div><div></div> Green</div>											
<div><div></div> Blue</div>											
(TriColor)											