


## 0.216 x 0.139" (5.49 x 3.53 mm) Mounting Hole

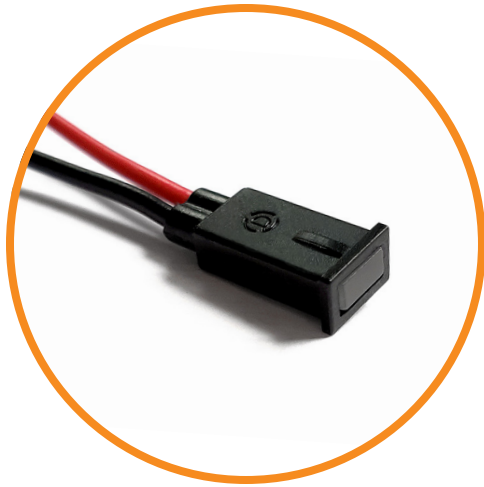

### Certifications & Ratings

- RoHS compliant


### Application

Dialight's 559 series LED panel mount indicator is available with a variety of LEDs including AlInGaP and InGaN technology for high brightness applications, bicolor and integral resistors.

- Fan tray assemblies
- Data-center Infrastructure (Servers and Storage)
- Next-Gen Wireless Infrastructure
- Electronic Test & Measurement Instruments
- Communications Testing Equipment
- Hand held Devices
- ... and many more!

### Dimensions

inches [mm]

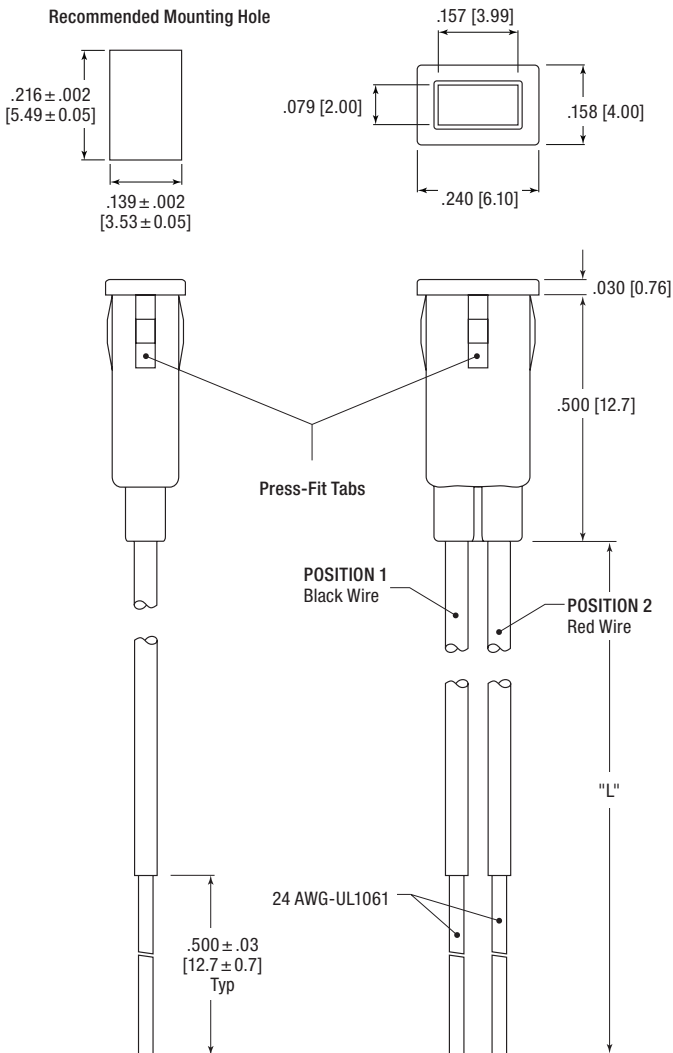

### Mechanical Information

**Mounting Hole Size:** 0.216 ± .002" x .139 ± .002"  
(5.49 ± .05 mm x 3.53 ± .05 mm)

**Max Panel Thickness:** 0.031 – 0.062" (.787 – 1.57 mm)

### Specifications

**Voltage Options:** 1.6 – 2.3 V DC typical  
(resistor required)

**Operating Temp:** See table

**Storage Temp:** See table


**Electrical Connection:** 24 AWG 14" lead wire

**Housing:** Black – UL94V-0 and enhances LED contrast

#### SINGLE COLOR LED SCHEMATIC



#### BICOLOR LED SCHEMATIC

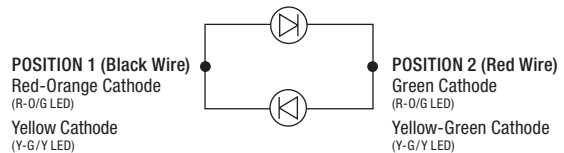

## Ordering Information 559 Rectangle Series

Part Number Guide										RoHS Compliant		
5	5	9	-	8	X	X	0	-	0	0	7	F
											Termination	
											7	24 AWG 14" wire leads
Color												
1	0	● Red										
2	0	● Green										
3	0	● Yellow										
1	2	● Red-Orange / ● Green										
3	2	● Yellow-Green / ● Yellow										

Part Number	Color	Peak Wavelength (nm)	Intensity Typ. (mcd)	If Typ. (mA)	Vf Typ. (V DC)	Viewing Angle	Max DC Forward Current (mA)	Operating Temp	Storage Temp
559-8100-007F	● Red	635	125	20	2.0	104	30	-55 °C to +100 °C	-55 °C to +100 °C
559-8200-007F	● Green	565	120		2.1	104	30	-20 °C to +100 °C	
559-8300-007F	● Yellow	585	140		2.1	104	20	-55 °C to +100 °C	
559-8120-007F	● ● Red-Orange / Green	630/565	90/40		2.1	140	30	-55 °C to +100 °C	
559-8320-007F	● ● Yellow-Green / Yellow	570/591	30/50		2.1	120	20	-30 °C to +85 °C	

Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: [www.dialightsignalsandcomponents.com](http://www.dialightsignalsandcomponents.com)

**Warranty Statement:** Except for the warranty expressly provided for [herein/above/below], Dialight disclaims any and all other warranties, express or implied, including, without limitation, any warranties of merchantability, fitness for a particular purpose, title, and noninfringement.