




DTSHW-6, DTS(G)MW-6 SERIES

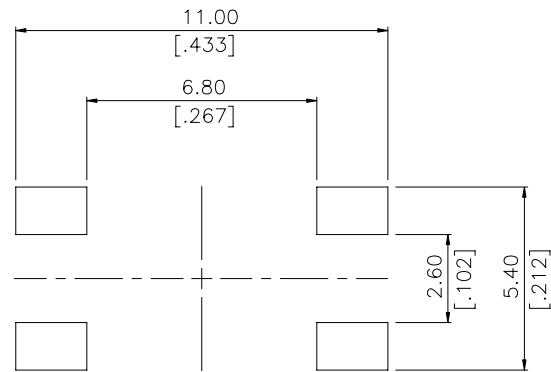



DIMENSIONS

DTSMW-64.65.67.69

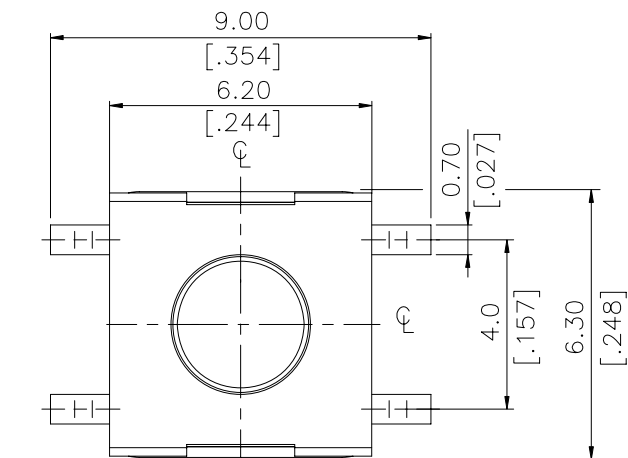

P.C.B. LAYOUT




CIRCUIT DIAGRAM

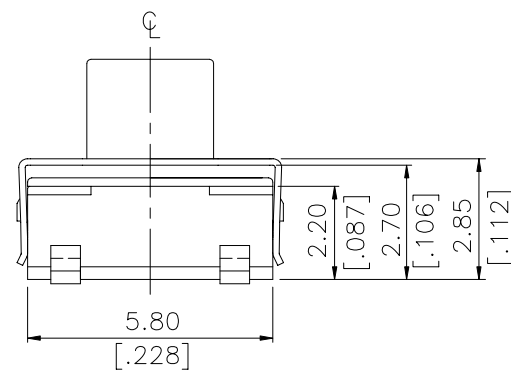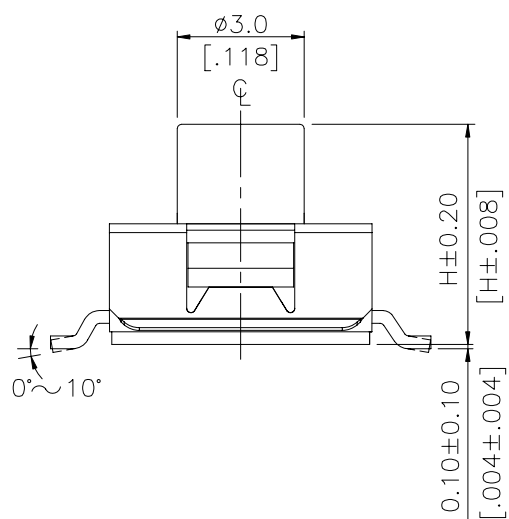

DTSMW-69	3.8mm [.150]
DTSMW-67	5.2mm [.205]
DTSMW-65	3.5mm [.138]
DTSMW-64	4.5mm [.177]
PART NO:	H



General Tolerance : $\pm 0.2\text{mm}$

DTSMW-68

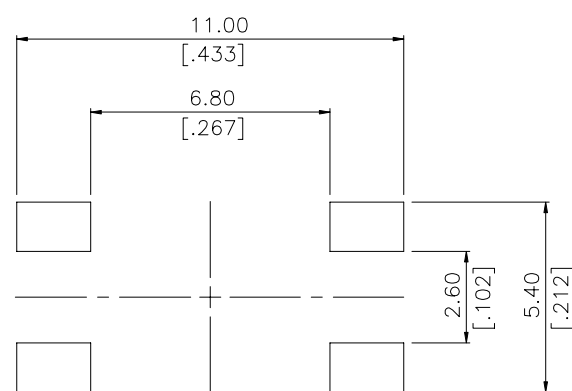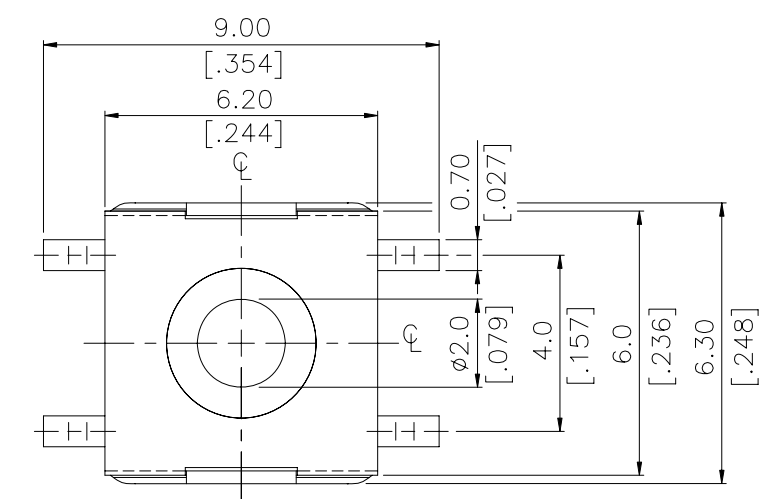


(SCALE 8:1)
P.C.B. LAYOUT

CIRCUIT DIAGRAM

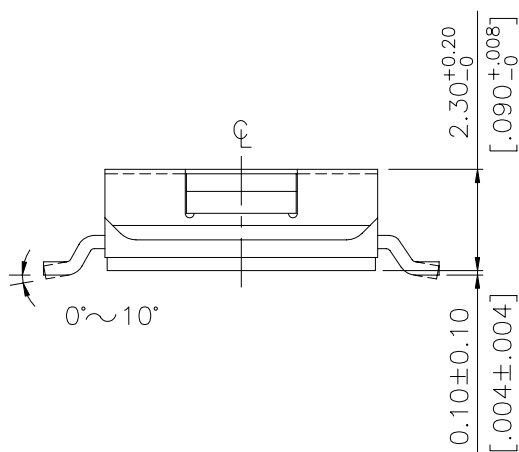


General Tolerance : $\pm 0.2\text{mm}$

DTSMW-66



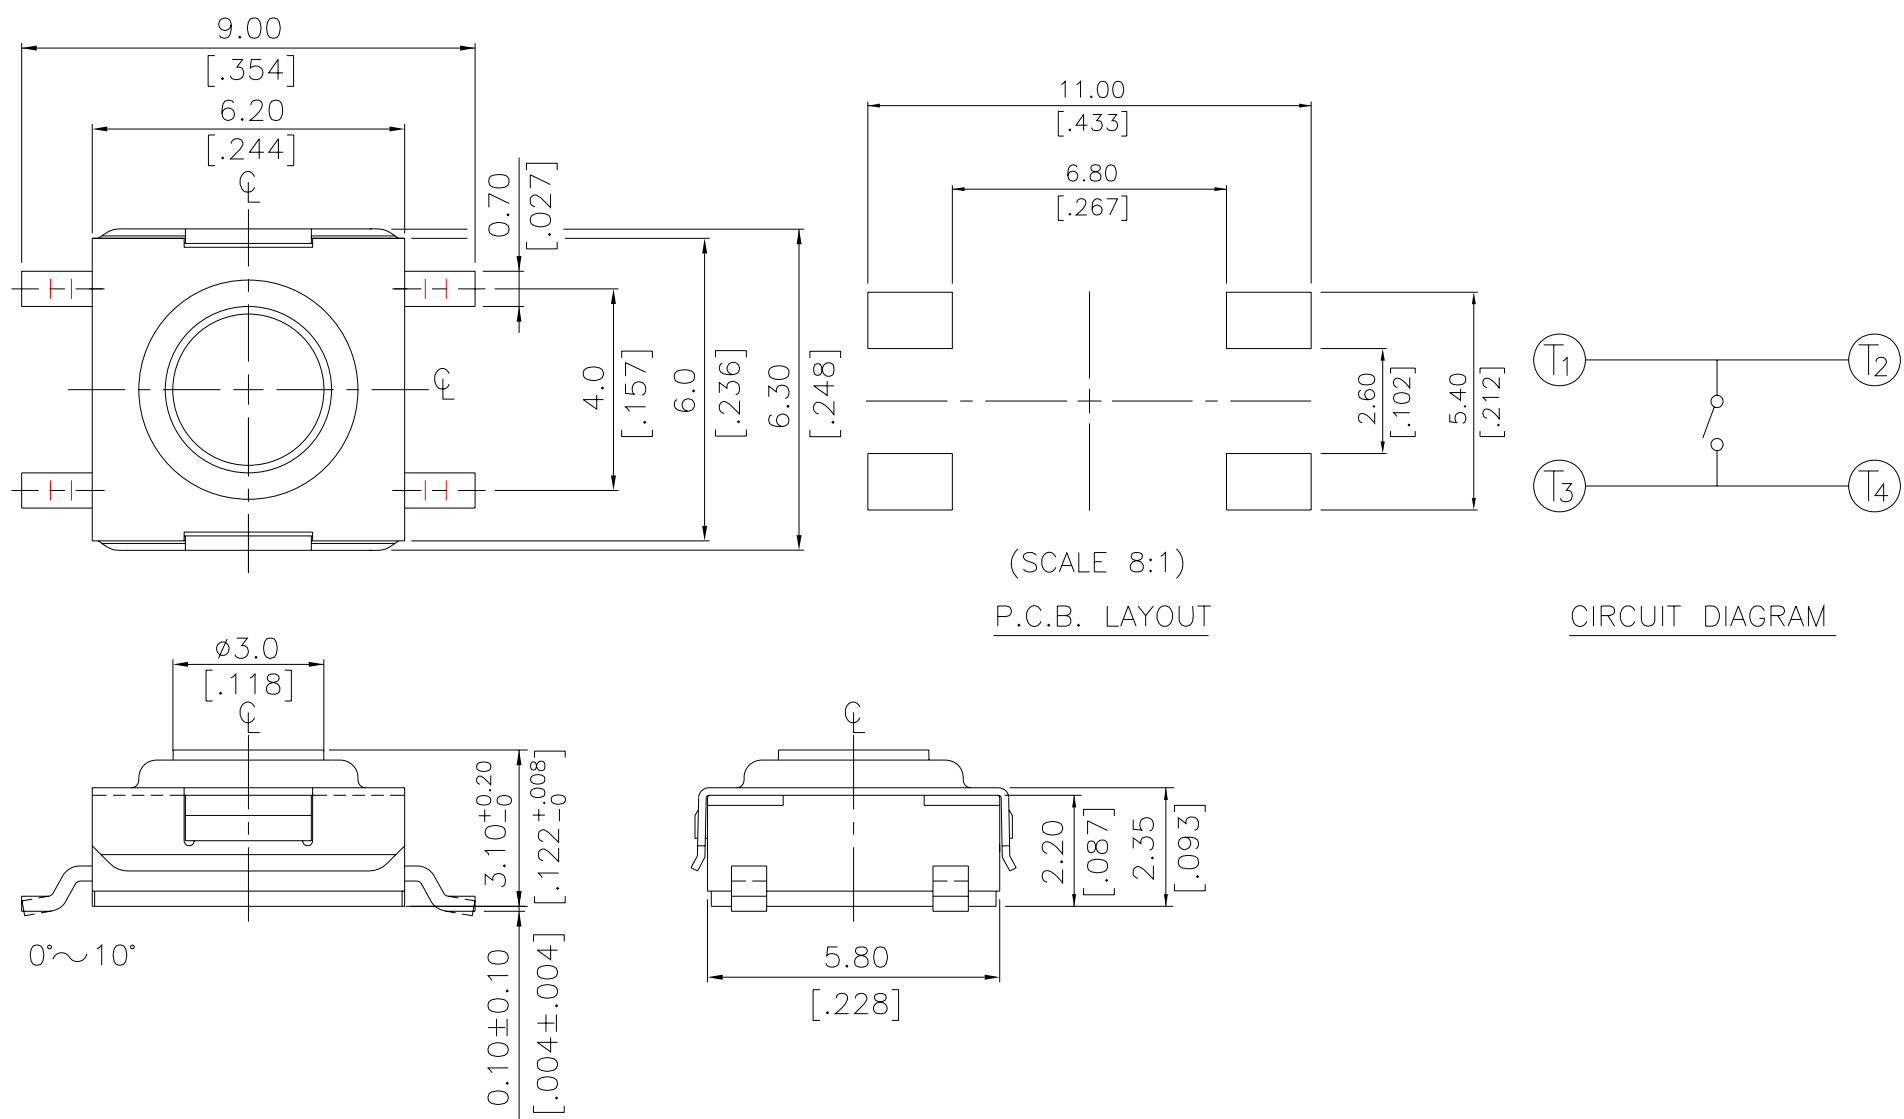


DTSGMW-66

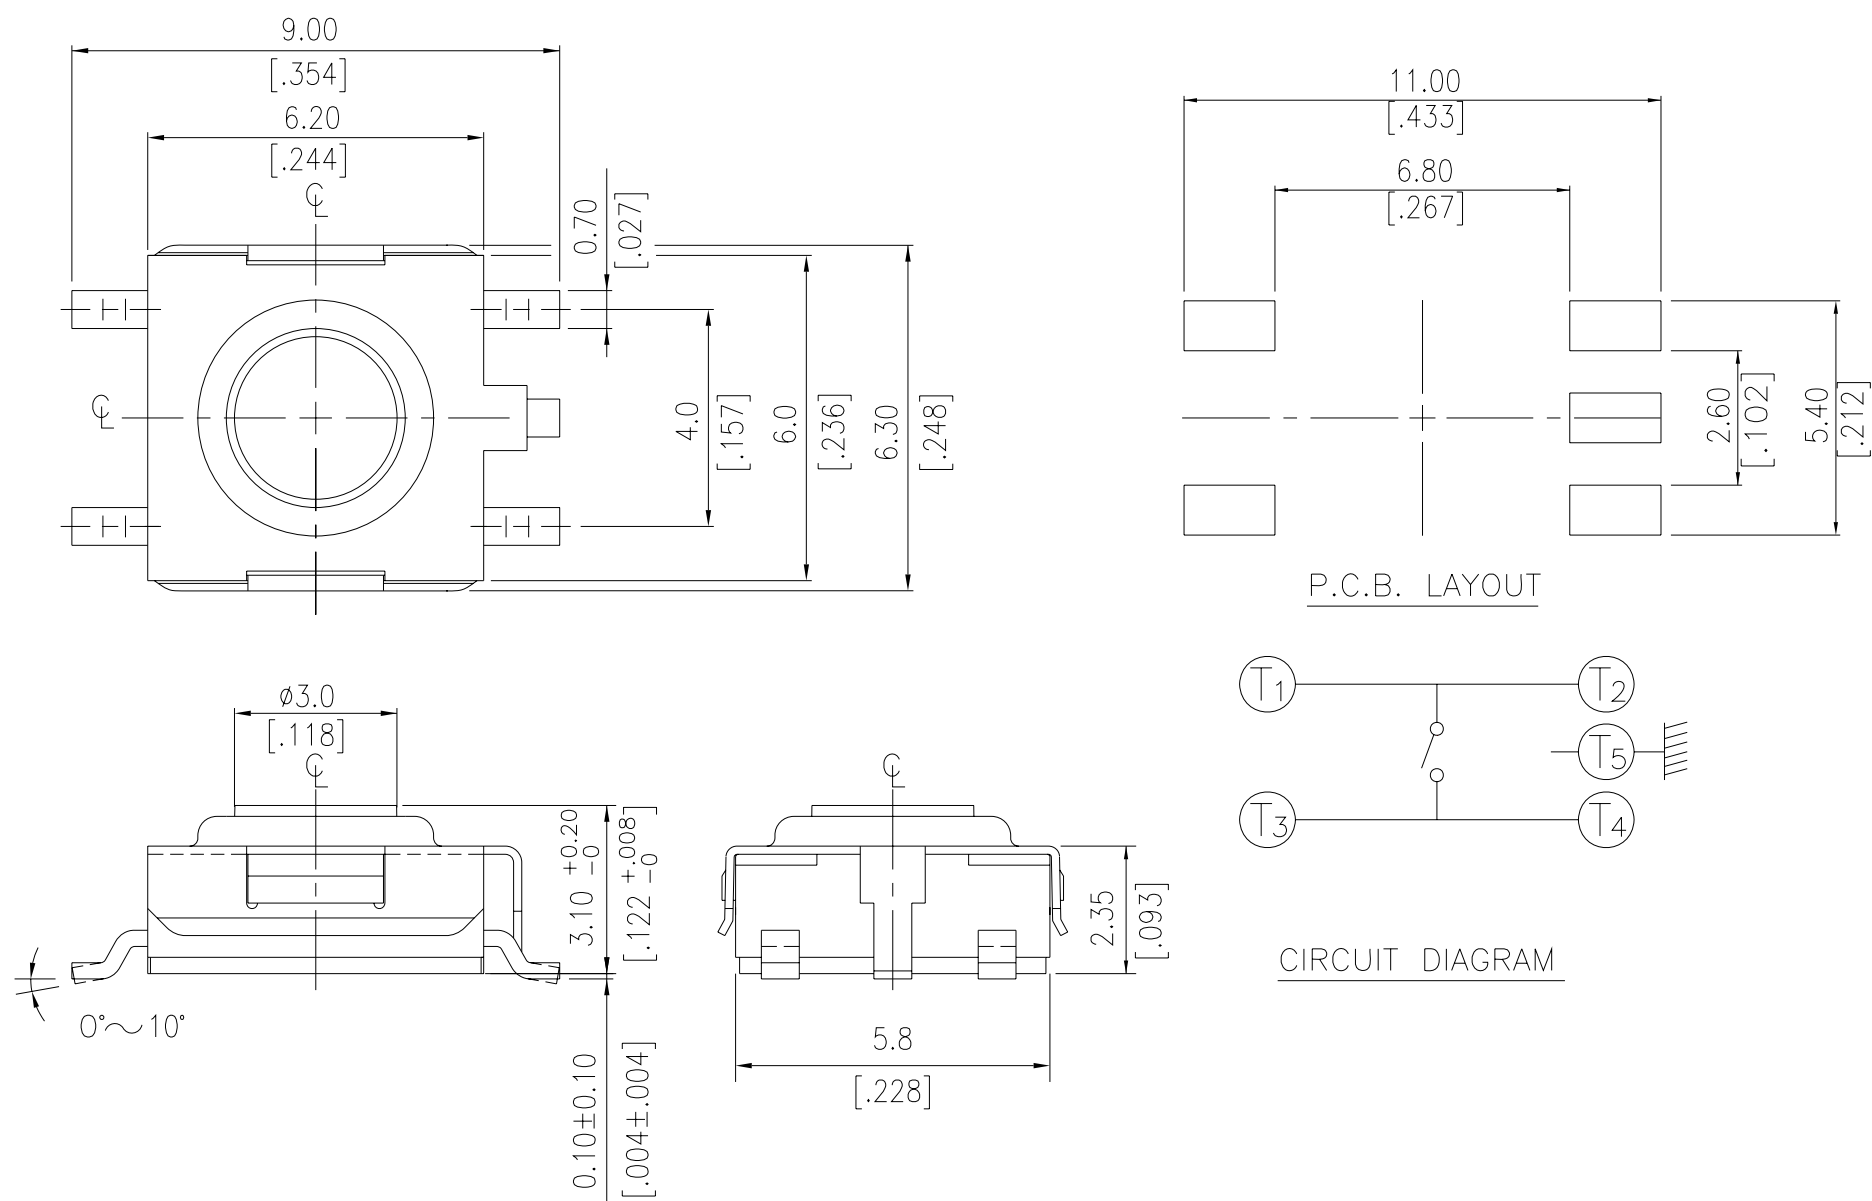



General Tolerance : $\pm$ 0.2mm

DTSHW-64.65.67.69

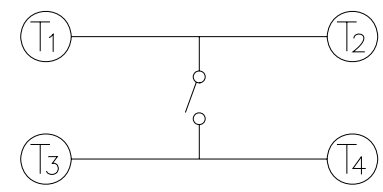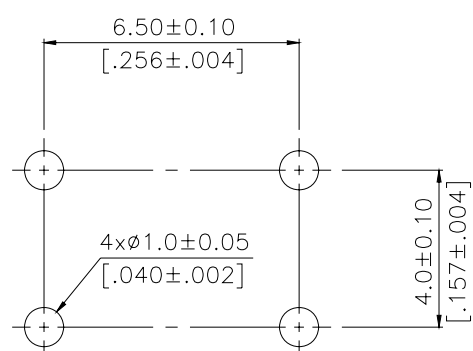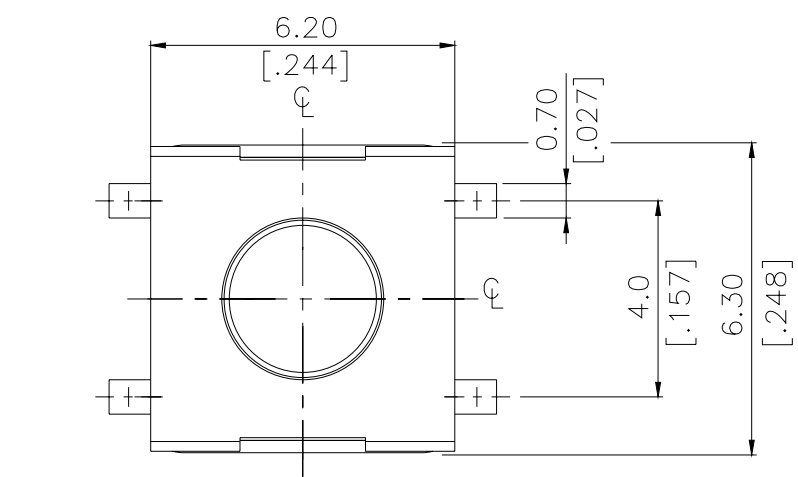




P.C.B. LAYOUT

CIRCUIT DIAGRAM

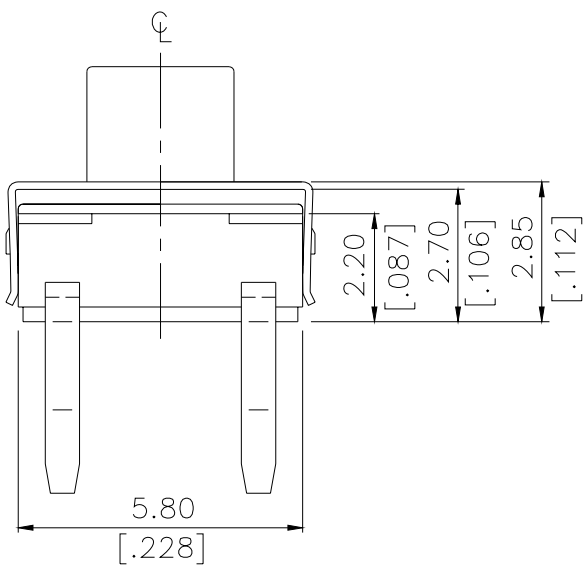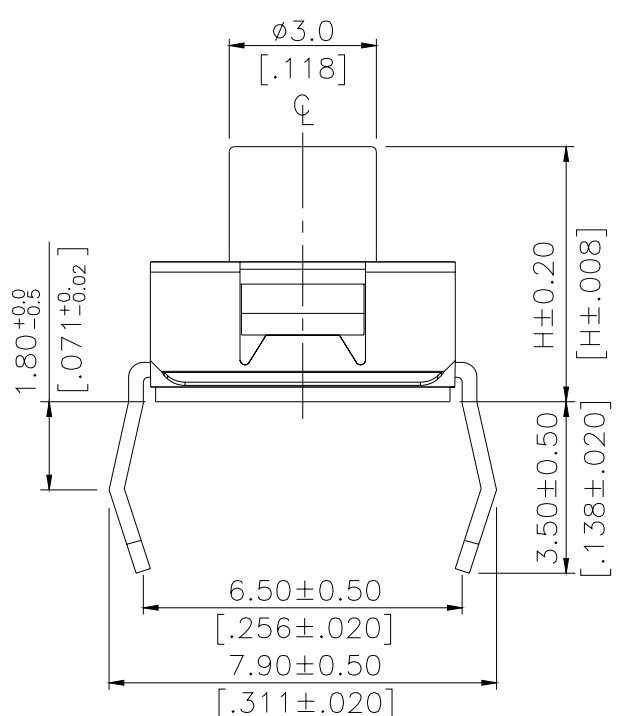



DTSMW-69	3.8mm[.150]
DTSMW-67	5.2mm[.205]
DTSMW-65	3.5mm[.138]
DTSMW-64	4.5mm[.177]
PART NO:	H

DTSHW-68

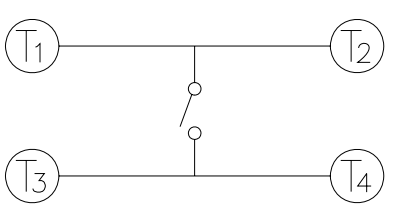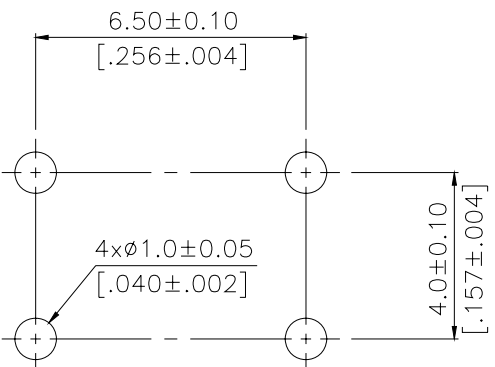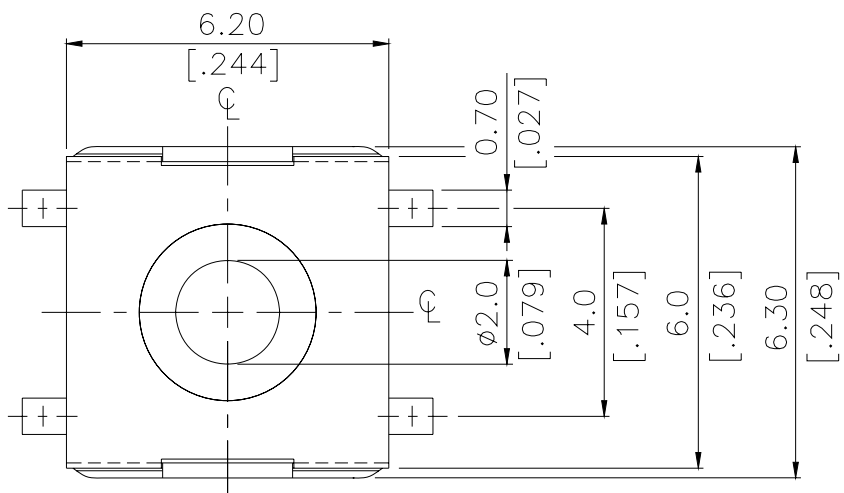


P.C.B. LAYOUT

CIRCUIT DIAGRAM

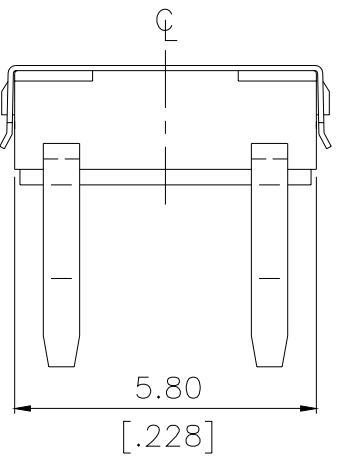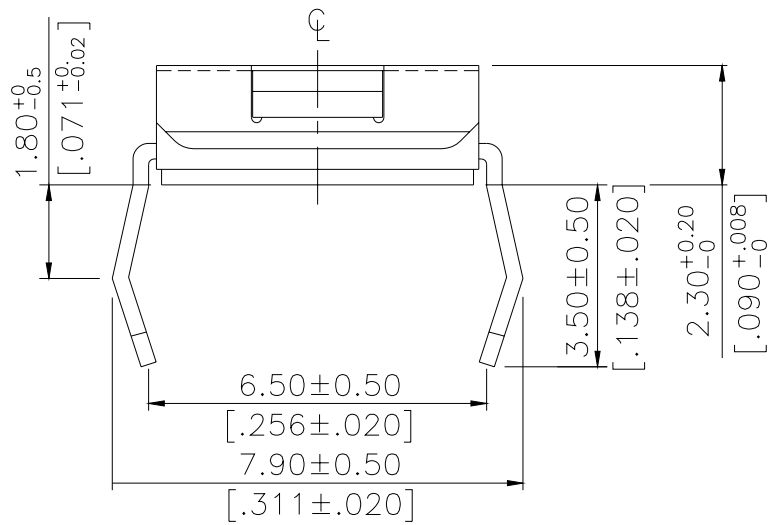


General Tolerance : ±0.2mm

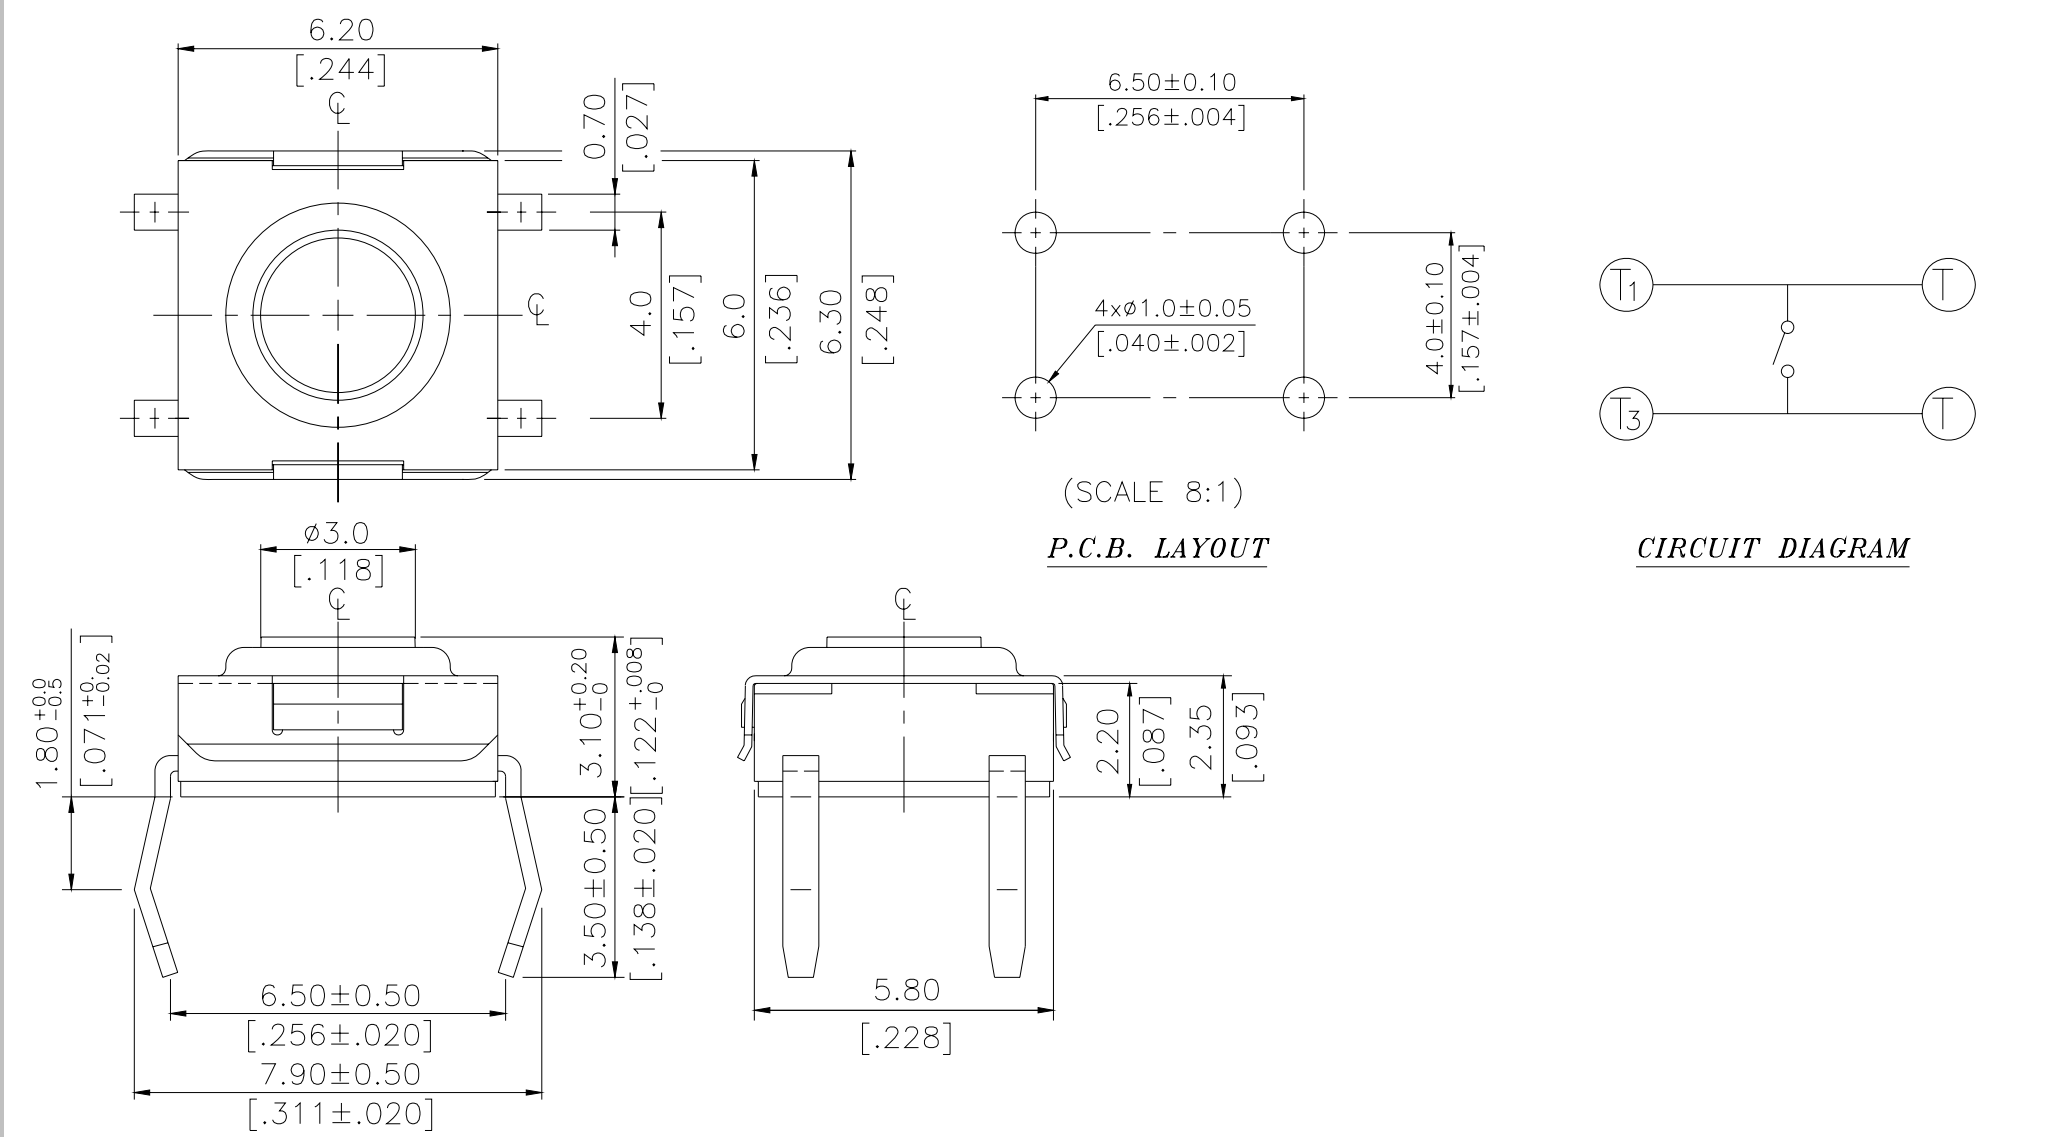

General Tolerance : $\pm 0.2\text{mm}$

HOW TO ORDER

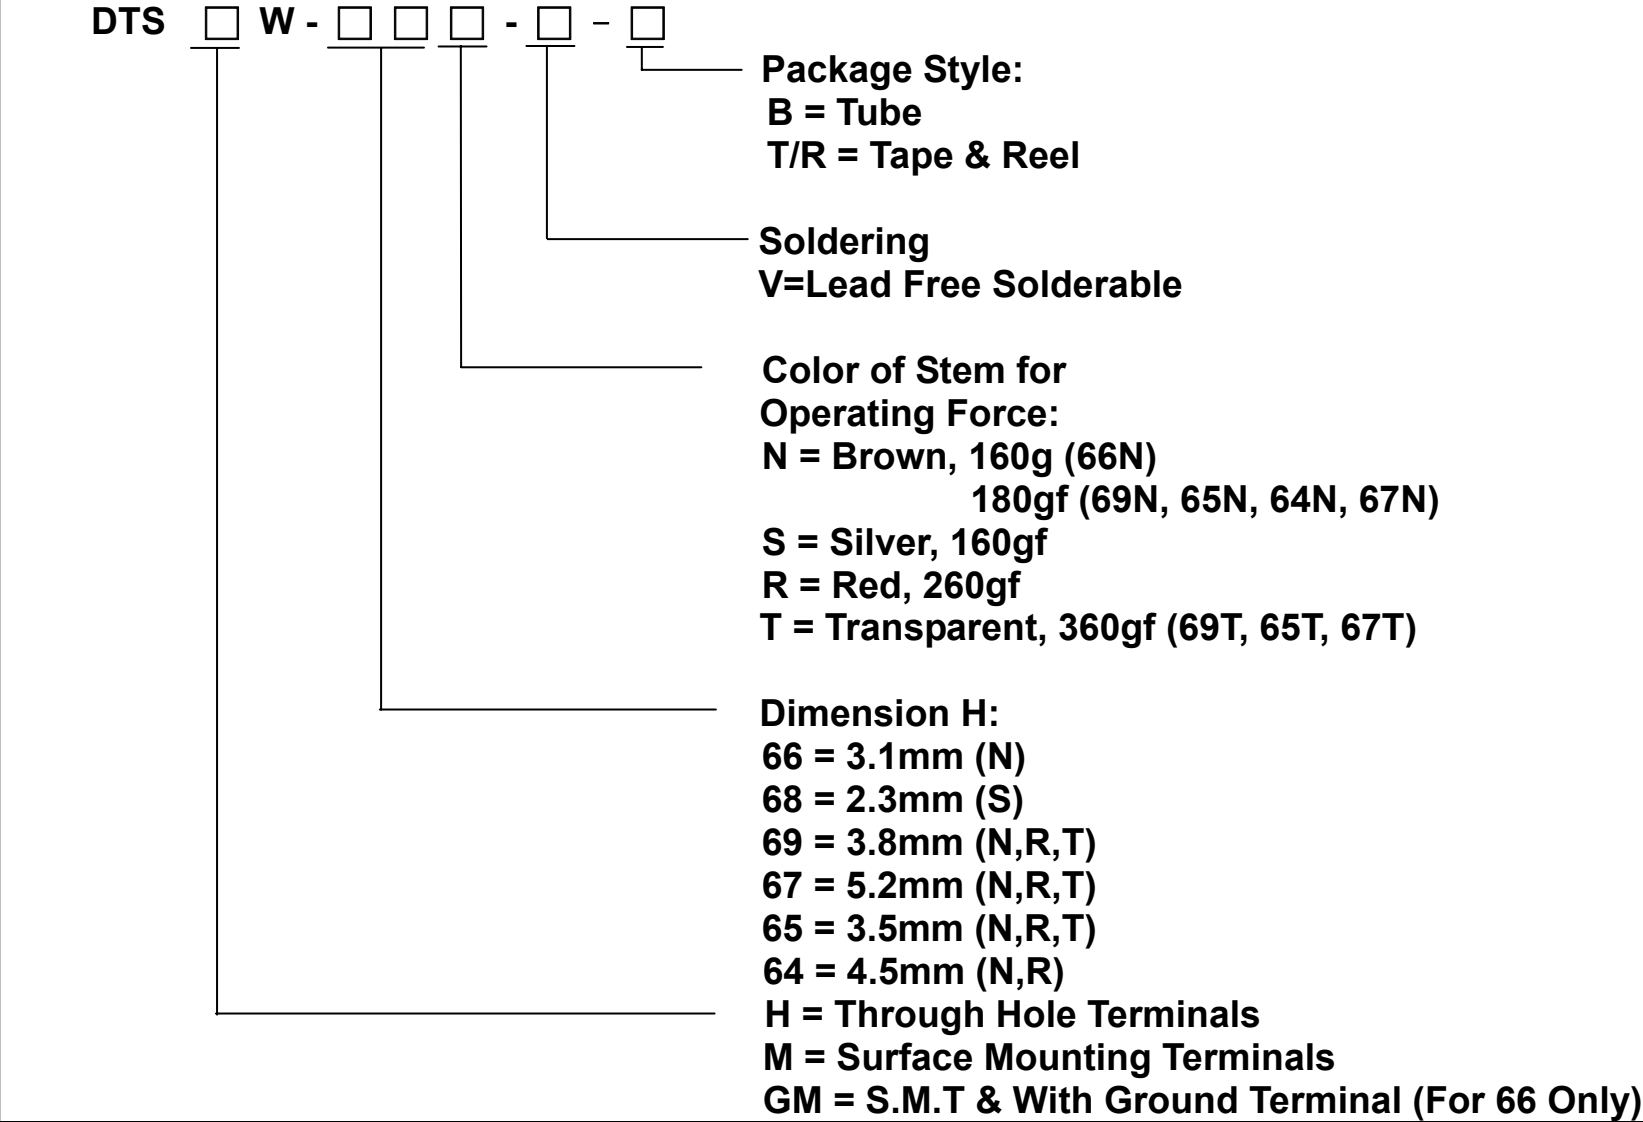

SPECIFICATION

△MECHANICAL

Operation Force:

360± 90gf, Transparent (T), DTSH(M)W – 69, 67, 65

260± 70gf Red (R), DTSH(M)W – 69,67,65,64

180± 50gf Brown (N), DTS(M)W – 69,67,65,64

160 ± 50gf Brown (N), DTS(M)W – 66, DTSGMW-66

160 ± 50gf Silver (S), DTSH(M)W – 68

Stop Strength: Max 3kgf vertical static load continuously for 15 seconds

Stroke: 0.25 +0.20 / - 0.1 mm 66N, 68S

0.6 ±0.2mm, 69, 67T

0.45 ±0.2mm, 69, 67, 64,65N(R),65T

Operation Temperature: -25℃ to +70℃

Storage Temperature: -30℃ to +80℃

△ELECTRICAL

Electrical Life:

500,000 cycles min. for DTS□W-69, 65N(R)T, 64N(R)

500,000 cycles min. for DTS□W-67N(R)T

100,000 cycles min. for DTS□W-66N,68S, DTSGMW-66N

Rating: 50mA, 12VDC

Contact Resistance: 100mΩ max.

Insulation Resistance: 100MΩ min. at 500VDC

Dielectric Strength: 250VAC/ minute

Contact Arrangement: 1 pole 1 throw

MATERIAL

△COVER: Stainless steel

Nickel Silver (DTSGMW-66)

△TERMINAL: Brass with silver plated

△BASE: UL94V-0 Nylon High-Temp. Thermoplastic

Color: Black

ITEM NO.	DTSGMW-66N DTSHW-66N DTSMW-66N	DTSMW-68S DTSHW-68S	DTS(H)MW-69,65N(R)	DTS(H)MW-67N(R)T
STEM	High-Temp Thermoplastic Nylon UL94V-0 Color : Brown (N),160gf	None	Silicone Rubber	Silicone Rubber
ADHESIV TAPE	TEFLON	TEFLON(standard) KAPTON(V-option)	None	None
METAL STEM	Brass with Nickel plated	Brass with Nickel plated Color: silver(s),160gf	None	None
FILLER	None	None	None	Nylon
CONTACT	Stainless steel			


SOLDERING PROCESS

△WAVE SOLDERING : Recommended solder temperature at 500°F (260℃) max. 5 seconds subject to PCB 1.6mm thickness (soldering for through hole type)

△HAND SOLDERING : Use a soldering iron of 30 watts, controlled at 350℃ approximately 5 seconds while applying solder.

△REFLOW SOLDERING :


△ Temperature Profile:

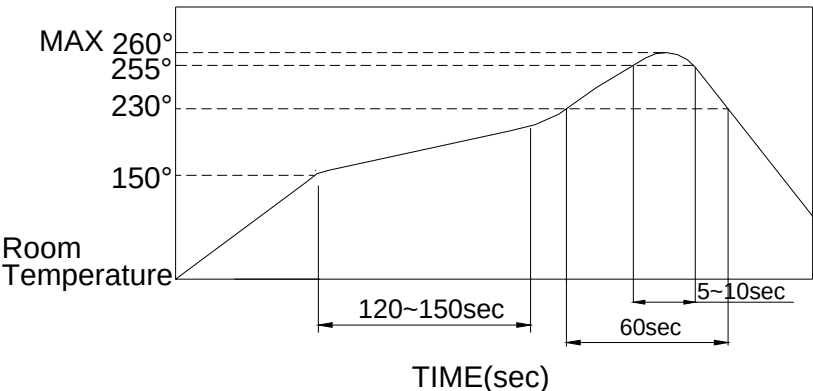

PACKING


Part Number	Number Per Tube	Number Per Reel
DTSHW-6□	75	-
DTSGMW-66	-	2000
DTSMW-66	75	2000
DTSMW-68	75	2000
DTSMW-69	75	1900
DTSMW-65	75	1900
DTSMW-67	75	900
DTSMW-64	75	900

DTSMW-67 、 64 REEL

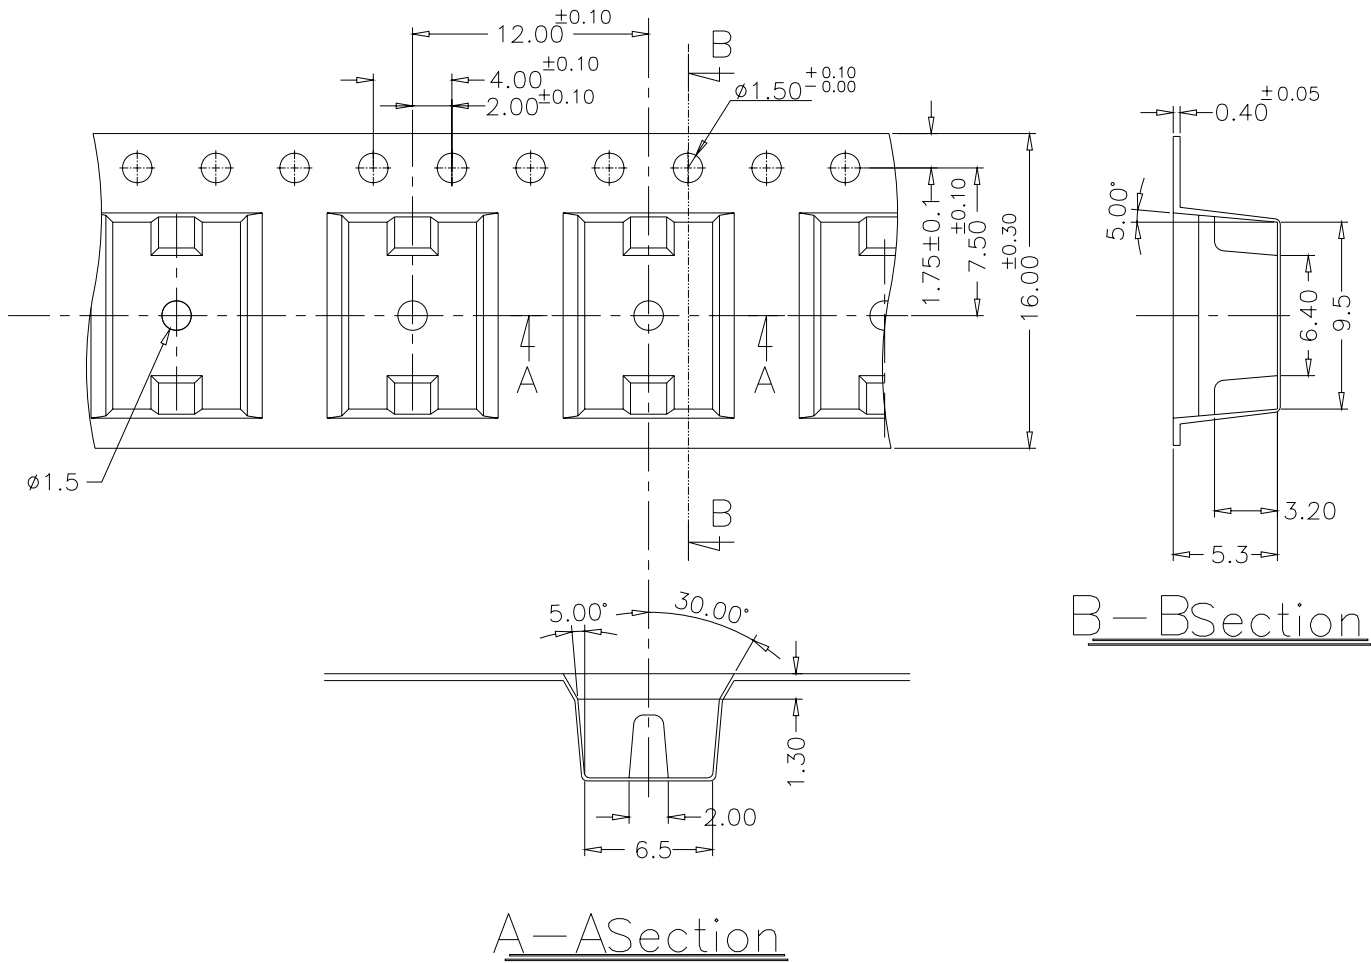


General Tolerance : $\pm 0.1\text{mm}$

DTSHW-6 TUBE

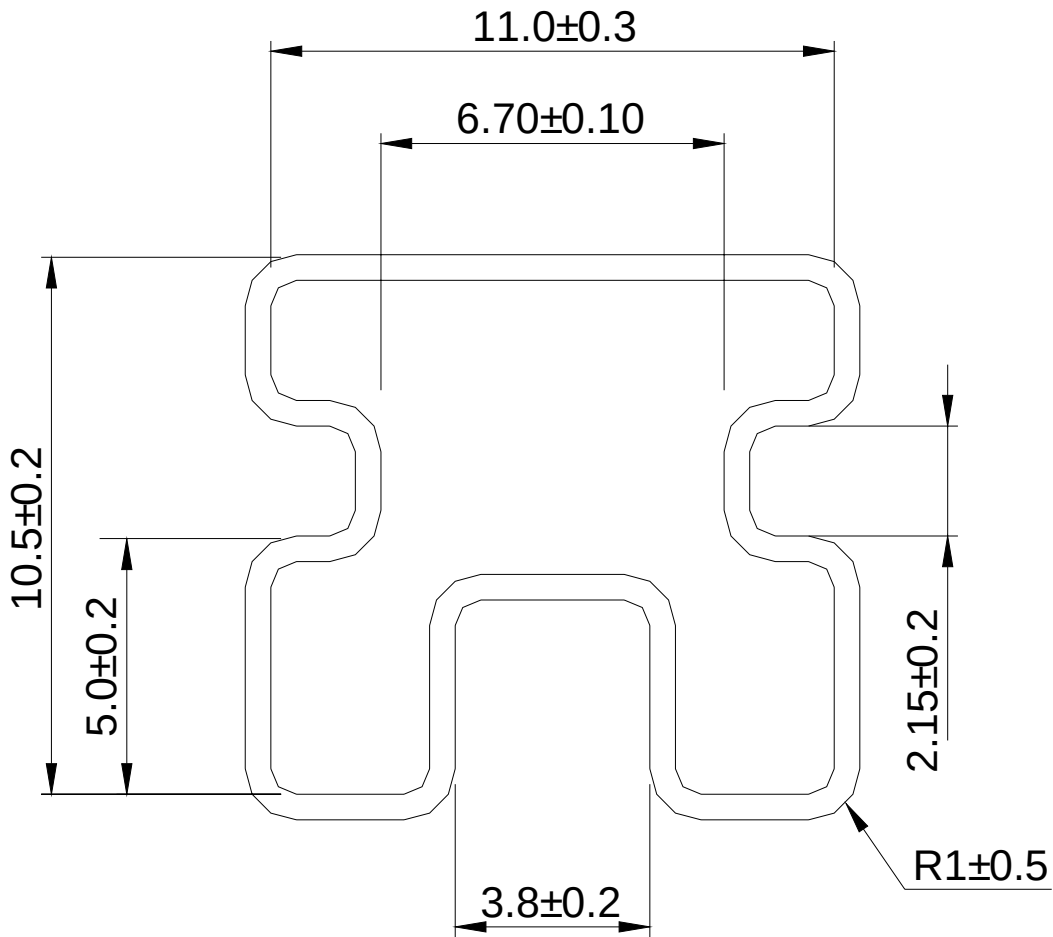


General Tolerance : $\pm 0.2\text{mm}$

DTS(G)MW-66 REEL

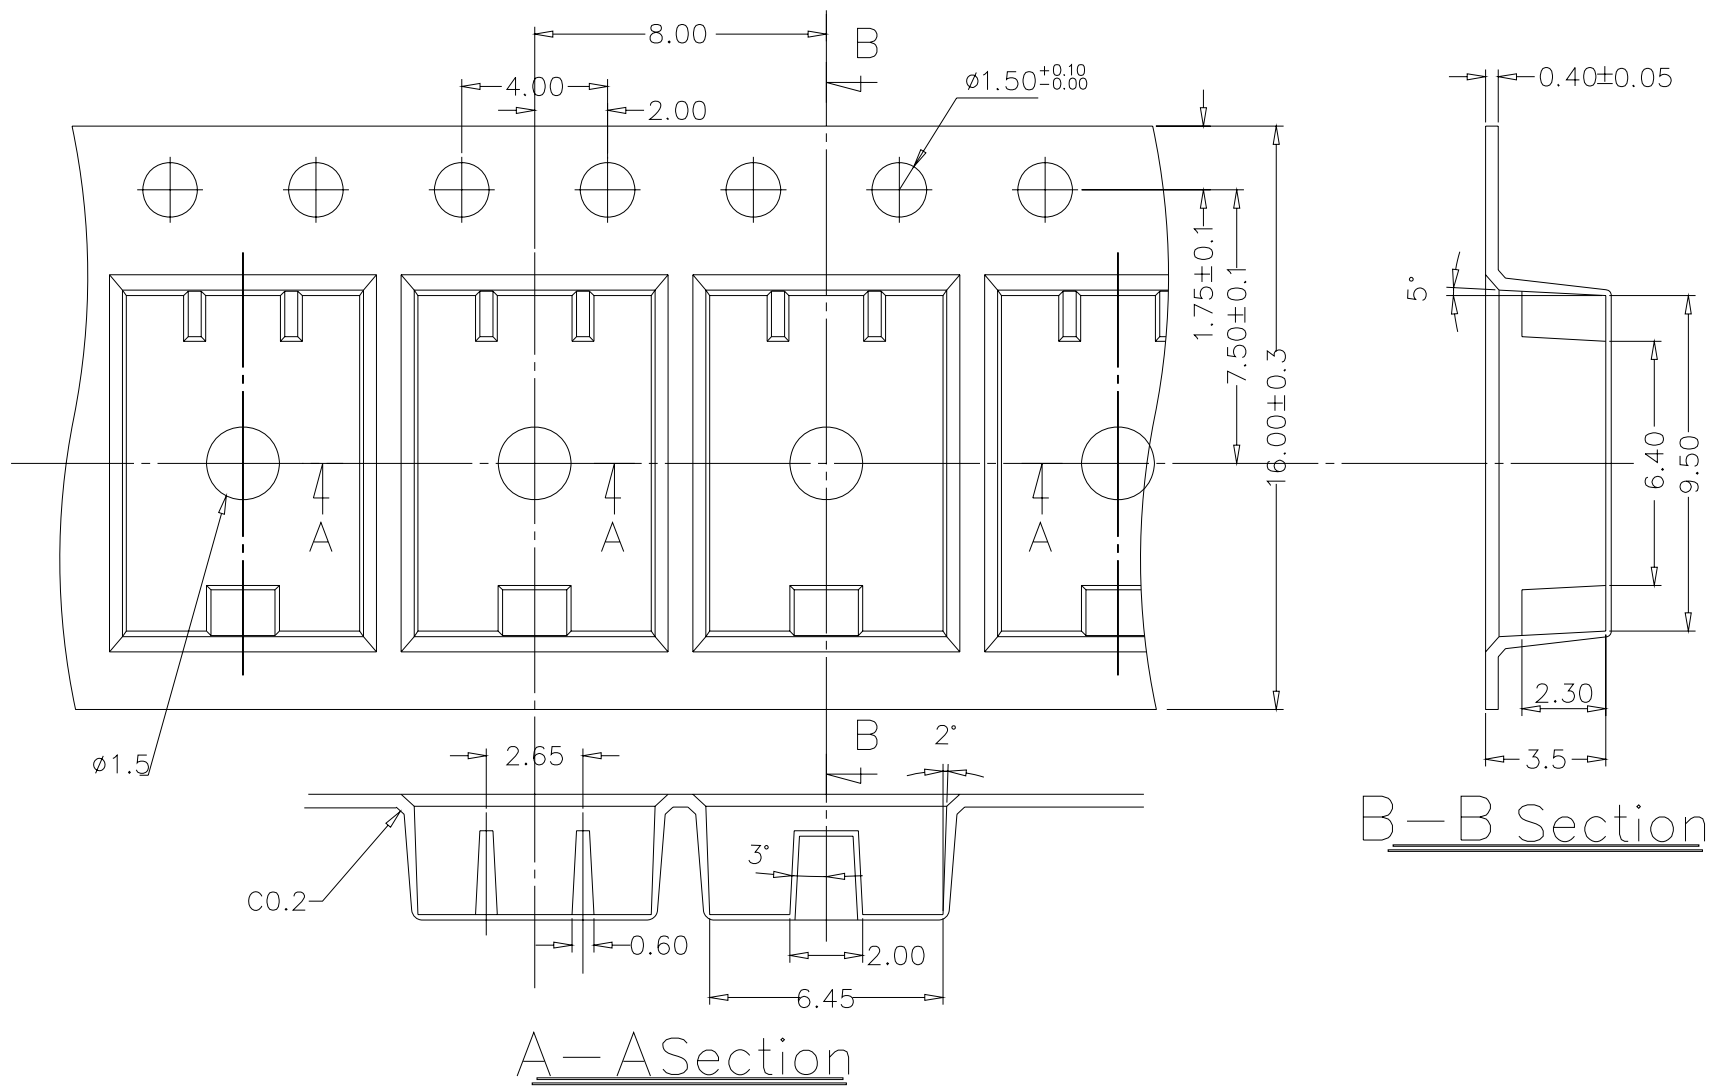

General Tolerance : $\pm 0.1\text{mm}$

DTSMW-6 TUBE

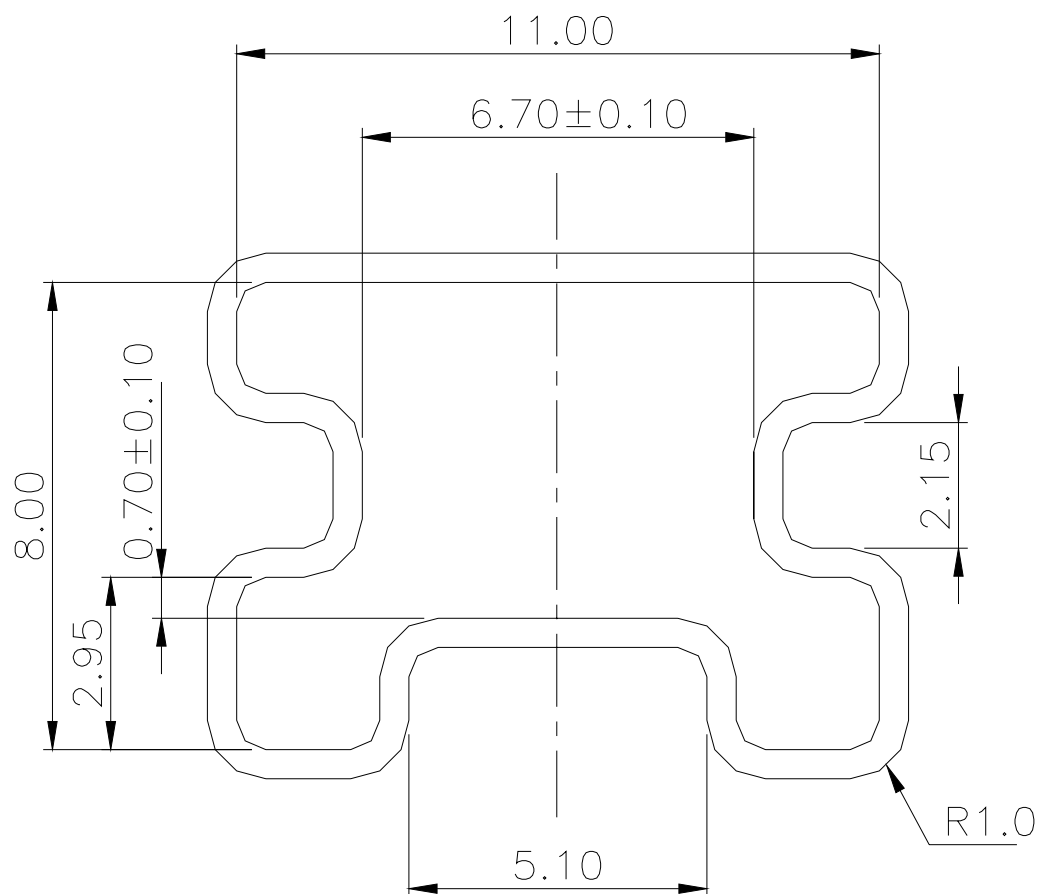

General Tolerance : $\pm 0.2\text{mm}$