


# EB13E2 Series



ECLIPTEK<sup>®</sup>  
CORPORATION

- Crystal Clock Oscillators
- LVCMOS Output
- +3.3V Supply Voltage
- Tri-State Output Function
- 4 Pad Ceramic SMD Package
- Low Stand-by Current
- RoHS Compliant (Pb-Free)

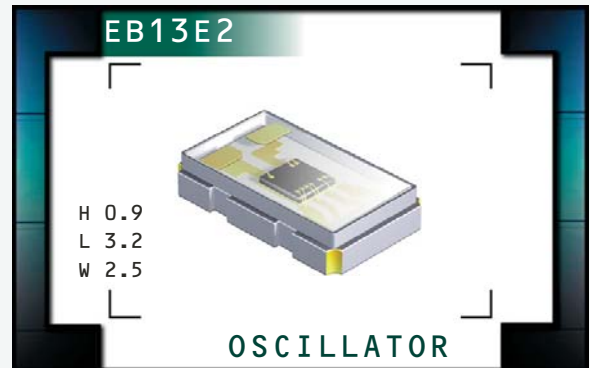

## ELECTRICAL SPECIFICATIONS

<b>Frequency Range (MHz)</b>	1.8463, 2.000, 2.048, 2.4576, 3.6864, 4.000, 4.800, 5.000, 6.000, 7.040, 7.159, 7.3728, 8.000, 8.192, 10.000, 11.0592, 12.000, 12.288, 13.000, 13.1072, 13.500, 14.3181, 14.31818, 14.7456, 15.000, 16.000, 16.384, 16.6666, 16.66667, 16.6667, 18.000, 18.432, 19.200, 19.440, 19.6608, 20.000, 22.1184, 22.400, 24.000, 24.5454, 24.576, 25.000, 26.000, 26.2144, 26.973, 27.000, 28.375, 28.63636, 28.636363, 29.4912, 29.500, 30.000, 32.000, 32.768, 33.000, 33.200, 33.330, 33.333, 33.3333, 36.000, 38.400, 40.000, 40.0908, 48.000, 49.0908, 49.152, 50.000, 54.000, or 100.000MHz
------------------------------	--

<b>Operating Temperature Range (OTR)</b>	-20°C to +70°C -40°C to +85°C
--	----------------------------------

<b>Storage Temperature Range (STR)</b>	-55°C to +125°C
--	-----------------

<b>Supply Voltage (V<sub>DD</sub>)</b>	3.3V <sub>DC</sub> ±5%
--	------------------------

<b>Input Current (I<sub>DD</sub>)</b>	1.8463MHz to 9.999MHz	3mA Maximum
	10.000MHz to 19.999MHz	4mA Maximum
	20.000MHz to 39.999MHz	5mA Maximum
	40.000MHz to 50.000MHz	6mA Maximum
	50.001MHz to 54.000MHz	9mA Maximum
	100.000MHz	14mA Maximum

<b>Frequency Tolerance/Stability</b>	Inclusive of all conditions: Calibration Tolerance at 25°C, Frequency Stability over the Operating Temperature Range, Supply Voltage Change, Output Load Change, First Year Aging at 25°C, Shock, and Vibration	±100ppm Maximum ±50ppm Maximum ±25ppm Maximum
--------------------------------------	--	---

<b>Output Voltage Logic High (V<sub>OH</sub>)</b>	90% of V <sub>DD</sub> Minimum (I <sub>OH</sub> = -4mA)
---	---

<b>Output Voltage Logic Low (V<sub>OL</sub>)</b>	10% of V <sub>DD</sub> Maximum (I <sub>OL</sub> = +4mA)
--	---

<b>Rise Time / Fall Time (T<sub>R</sub>/T<sub>F</sub>)</b>	20% to 80% of Waveform, 1.8463MHz to 24MHz	5nSeconds Maximum
	20% to 80% of Waveform, 24.001MHz to 50MHz	4nSeconds Maximum
	20% to 80% of Waveform, 50.001MHz to 100MHz	3nSeconds Maximum

<b>Duty Cycle (SYM)</b>	at 50% of Waveform	50 ±5(%)
-------------------------	--------------------	----------

<b>Load Drive Capability (C<sub>LOAD</sub>)</b>	15pF Maximum
---	--------------

<b>Tri-State Input Voltage</b>	No Connection	Enables Output
	V <sub>IH</sub> : ≥80% of V <sub>DD</sub>	Enables Output
	V <sub>IL</sub> : ≤20% of V <sub>DD</sub>	Disables Output: High Impedance

<b>Standby Current</b>	Disabled Output: High Impedance	10µA Maximum
------------------------	---------------------------------	--------------

<b>Start Up Time (T<sub>S</sub>)</b>	10 mSeconds Maximum
--------------------------------------	---------------------

<b>RMS Phase Jitter</b>	F <sub>J</sub> = 12kHz to 20MHz	1 pSeconds Maximum
-------------------------	---------------------------------	--------------------

MANUFACTURER ECLIPTEK CORP.	CATEGORY OSCILLATOR	SERIES EB13E2	PACKAGE CERAMIC	VOLTAGE 3.3V	CLASS OS5A	REV. DATE 10/10
--------------------------------	------------------------	------------------	--------------------	-----------------	---------------	--------------------

## PART NUMBERING GUIDE

### EB13E2 E 2 H - 40.000 TR

#### FREQUENCY TOLERANCE / STABILITY

C = ±100ppm Maximum over -20°C to +70°C  
 D = ±50ppm Maximum over -20°C to +70°C  
 E = ±25ppm Maximum over -20°C to +70°C  
 G = ±100ppm Maximum over -40°C to +85°C  
 H = ±50ppm Maximum over -40°C to +85°C  
 J = ±25ppm Maximum over -40°C to +85°C

#### PACKAGING OPTIONS

Blank = Bulk, TR = Tape & Reel

#### FREQUENCY


#### OUTPUT CONTROL FUNCTION

H = Tri-State

#### DUTY CYCLE


2 = 50 ±5(%)

#### MECHANICAL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

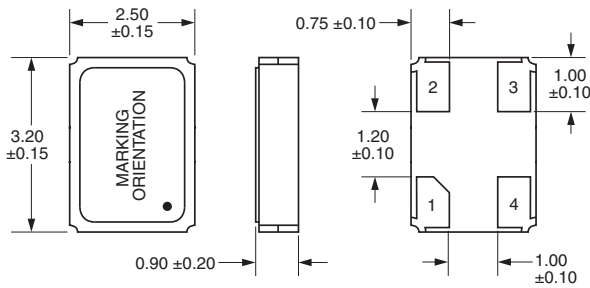


Pin 1: Tri-State  
 Pin 2: Case Ground  
 Pin 3: Output  
 Pin 4: Supply Voltage

#### SUGGESTED SOLDER PAD LAYOUT ALL DIMENSIONS IN MILLIMETERS

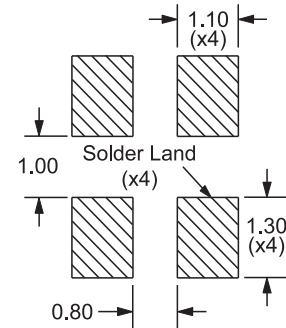


Tolerances = ±0.1

#### TAPE AND REEL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

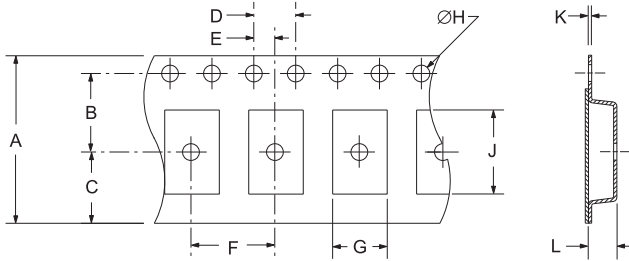

TAPE	A	B	C	D	E	
	8.0±0.2	3.5±0.1	2.75±0.1	4.0±0.1	2.0±0.1	
	F	G	H	J	K	L
	4.0±0.1	2.7±.1	1.55+0.5	3.4±.1	0.25±0.05	1.4±.1

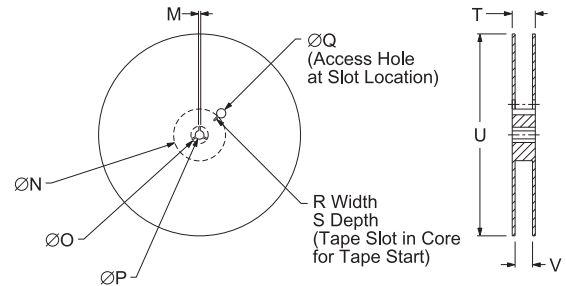


REEL	M	N	O	P	Q	
	1.5 MIN	50 MIN	20.2 MIN	13.0±0.5	40 MIN	
	R	S	T	U	V	QTY/REEL
	2.5 MIN	10 MIN	14.4 MAX	180 MAX	8.4+1.5-0	1,000

\*Compliant to EIA 481A

#### ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

PARAMETER	Specification
ESD Susceptibility	MIL-STD-883, Method 3015, Class 1, HBM: 1500V
Fine Leak Test	MIL-STD-883, Method 1014, Condition A
Flammability	UL94-V0
Gross Leak Test	MIL-STD-883, Method 1014, Condition C
Mechanical Shock	MIL-STD-883, Method 2002, Condition B
Moisture Resistance	MIL-STD-883, Method 1004
Moisture Sensitivity	J-STD-020, MSL 1
Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition K
Resistance to Solvents	MIL-STD-202, Method 215
Solderability	MIL-STD-883, Method 2003
Temperature Cycling	MIL-STD-883, Method 1010, Condition B
Vibration	MIL-STD-883, Method 2007, Condition A

#### MARKING SPECIFICATIONS

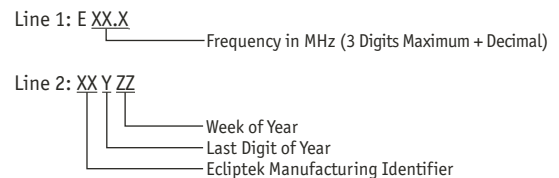

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	EB13E2	CERAMIC	3.3V	OS5A	10/10