


# BNC Connectors - 50 Ohm Commercial

For Flexible Cable

INCHES (MILLIMETERS) • CUSTOMER DRAWINGS AVAILABLE ON REQUEST




## Straight Crimp Type Plug - Solder or Crimp Contact - 3 and 4 Piece

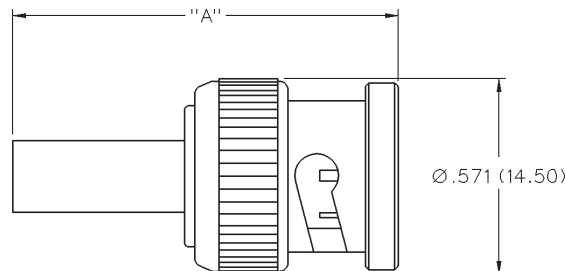

| PART NO.      | CABLE TYPE       | "A"           | CONTACT I.D. | BODY I.D.   | SLEEVE I.D. | TERMINATION           | PIECES |
|---------------|------------------|---------------|--------------|-------------|-------------|-----------------------|--------|
| CPMC-88-19    | RG-174, 188, 316 | 1.142 (29.00) | .0245 (0.62) | .093 (2.36) | .178 (4.52) | Crimp Sleeve          | 3      |
| CPM-88-19     | RG-174, 188, 316 | 0.932 (23.67) | .0245 (0.62) | .167 (4.24) | .118 (3.00) | Crimp Insert          | 4      |
| CPM-88-19 A/S | RG-174, 188, 316 | 1.272 (32.31) | .0245 (0.42) | .167 (4.24) | .118 (3.00) | Extended Crimp Insert | 4      |
| CPM-88-20     | RG-179, 187      | 0.932 (23.67) | .0165 (0.42) | .167 (4.24) | .118 (3.00) | Crimp Insert          | 4      |

Assembly instructions pages 246 and 247.

## Straight Crimp Type Plug - Solder or Crimp Contact - 3 Piece

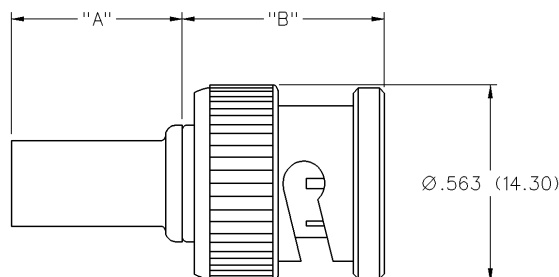

| PART NO.   | CABLE TYPE                 | "A"           | "B"           | CONTACT I.D. | BODY I.D.   | SLEEVE I.D.  |
|------------|----------------------------|---------------|---------------|--------------|-------------|--------------|
| CPMC-88-1  | RG-58, 141                 | .520 (13.20)  | .595 (15.11)  | .044 (1.12)  | .126 (3.20) | .206 (5.23)  |
| CPMC-88-2  | RG-59, 62                  | .520 (13.20)  | .595 (15.11)  | .034 (0.86)  | .173 (4.39) | .261 (6.63)  |
| CPMC-88-3  | BELDEN 8281                | .600 (15.24)  | .645 (16.38)  | .034 (0.86)  | .208 (5.28) | .344 (8.74)  |
| CPMC-88-5  | RG-6                       | .500 (12.70)  | .645 (16.38)  | .044 (1.12)  | .208 (5.28) | .280 (7.11)  |
| CPMC-88-10 | RG-59 PLENUM,<br>62 PLENUM | .520 (13.20)  | .595 (15.11)  | .0325 (0.83) | .141 (3.58) | .206 (5.23)  |
| CPMC-88-11 | RG-58 PLENUM;<br>RG-303    | .541 (13.74)  | .595 (15.11)  | .044 (1.12)  | .126 (3.20) | .192 (4.88)  |
| CPMC-88-13 | RG-142, 223, 400, 55       | .520 (13.20)  | .595 (15.11)  | .044 (1.12)  | .126 (3.20) | .220 (5.59)  |
| CPMC-88-14 | RG-180, 34M, 195           | .520 (13.20)  | .595 (15.11)  | .0165 (0.42) | .107 (2.72) | .175 (4.45)  |
| CPMC-88-17 | RG-8X (MINI 8)             | .520 (13.20)  | .595 (15.11)  | .065 (1.65)  | .173 (4.39) | .261 (6.63)  |
| CPMC-88-18 | BELDEN 8218, MINI 75       | .520 (13.20)  | .595 (15.11)  | .0245 (0.62) | .107 (2.72) | .175 (4.45)  |
| CPMC-88-21 | RG-58, RG-59 PLENUM        | 1.238 (31.45) | 1.143 (29.03) | .034 (0.86)  | .172 (4.37) | .213 (5.41)  |
| CPMC-88-26 | RG-11, BELDEN 1523A        | .709 (18.00)  | .763 (19.38)  | .067 (1.70)  | .291 (7.90) | .417 (10.60) |

Assembly instructions page 246.