

5

4

3

2

1

D

D

C


C

B

B

A

A

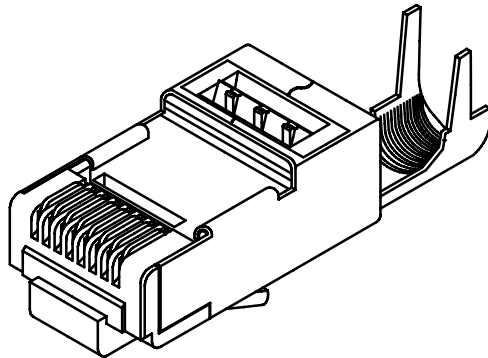

Description: Eight Conductor MOD Plug, Shield

Part No: 32-2298UL

Plug Tolerance and DIM: Complies with F.C.C requirements

Flame and Extinguish: 94-V0

Operation Temperature: -40°C to +85°C

Contact Resistance: 10 Milliohms Max.

Current/Voltage: 30 VAC/42 VDC at 1.5 AMPS





Material: Shield .012THK CDA-260 1/4 HARD BRASS
100-150 MICRO-INCH TIN PLATED

Housing Polycarbonate

Contact Phosphor bronze-.012THK
Gold plated

RoHS Compliance: Yes

Technical Detail: Meets or exceeds Category 5e TIA/EIA 568-B.2

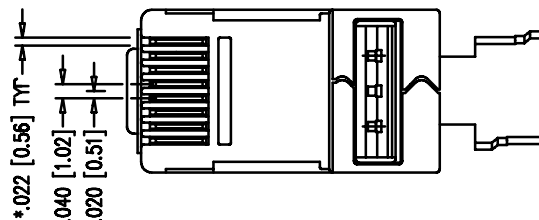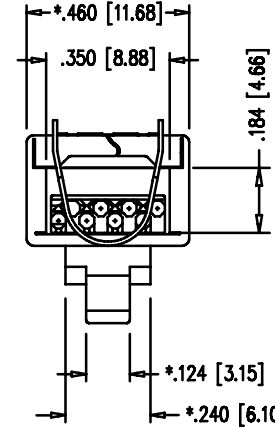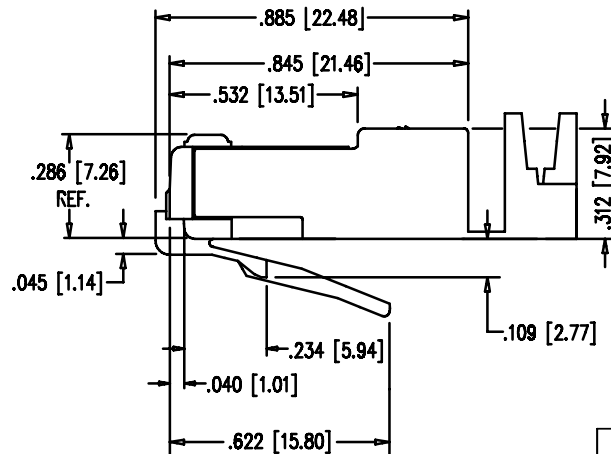

DRAWING NO.

32-2298UL-CUST

REVISIONS

01

OFFICIAL RELEASE

10-13-09

T

W

B

Y

T

02

TYPO MISTAKE: BRESS SHOULD
BE BRASS
UPDATE SPECIFICATIONS

08-14-12

Y

G

Y

G

M

L

ECO-12-0208

CUSTOMER COPY

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE
DECIMALS		TERRY.W	03-13-09
X	± 0.5	CHECKED BY	DATE
X.X	± 0.2	BETTY.YU	03-13-09
X.XX	± 0.1	APPROVED BY	DATE
ANGLES	± 0.5°	THOMAS	03-16-09
		U/M	mm

THIS DRAWING WAS PRODUCED BY COMPUTER,
DO NOT SCALE DRAWING OR UPDATE MANUALLY.

		Connectivity Solutions			
TITLE					
Eight Conductor MOD Plug, Shield					
SHEET	DRAWING NO.	SIZE			
1 OF 1	32-2298UL-CUST	A			