

Metallized Polyester Capacitors

A-05-17-05

I 5150-

I 5154

SIEMENS AKTIENGESELLSCHAFT 47E D

Stacked layer construction. Self-healing capacitor with polyester as dielectric. Epoxy resin dipped. Radial tinned copper leads.

Ordering code

Example: 0.47 / 10 / 100 / 515x

Rated
capacitance

Tolerance

Rated Voltage (U_R)

Code

0 = L.S. 7.5 mm

1 = L.S. 10 mm

2 = L.S. 15 mm



3 = L.S. 22.5 mm

4 = L.S. 27.5 mm

d (mm)	ϕ (mm)	L (mm)
7.5	0.6	11
10	0.8	13
15	0.8	18

*15mm available under request

Detail of meniscus:

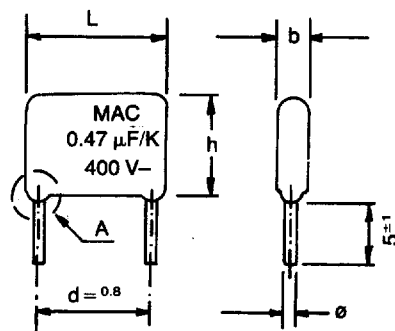

PC Board Thickness	C = 1 mm	C = 1.5 mm
Hole Diameter	F = 1 mm	F = 1.5 mm
Maximum penetration	$h \leq 0.8$ mm	$h \leq 1.3$ mm

SIEMENS AKTIENGESELLSCHAFT 47E D

Technical Data:

Climatic category in accordance with DIN 40040	G – minimum category temperature – 40C M – maximum category temperature + 100C F – average relative humidity (RH) ≤65% 60 days per year 75% 30 days per year 85%			
Damp heat test in accordance with DIN 40046 and IEC 384-2	Conditions: Test temperature (40±2)C Relative humidity (92±3)% Test duration 21 days After test: R _{ins} ≤ 50% of the minimum value at delivery ΔC C ≤ 5% Δtgδ at 1 kHz ≤ 5 x 10 ⁻³ 40/100/21			
Solder conditions	Temperature solder bath: max. 260°C Solder duration: 5 s Distance to the soldering joint: min. 6 mm.			
Self inductance	lead space (mm)	7.5	10	15
	Self inductance (nH)	5	6	7
Dissipation factor tg δ (measured at 20°C) 1 kHz 10 kHz	Maximum limit value	Average value		
	10.10 ⁻³	5.10 ⁻³		
	20.10 ⁻³	15.10 ⁻³		
Capacitance drift i _z	± 3%			

Metalized Polyester Capacitors
 MKT Capacitors - Epoxy Coated

A-05-17-05

I 5150 -
I 5154

SIEMENS AKTIENGESELLSCHAFT 47E D

Lead spacing		LS 22.5mm			
Rated dc voltage		100V	250V	400V	630V
Rated capacitance		Maximum Dimensions b x h x l (mm)			
CR	Tolerance	5153 -			
0.01 μ F	$\pm 20\%$ M $\pm 10\%$ K $\pm 5\%$ J				
0.015 μ F					
0.022 μ F					
0.033 μ F					
0.047 μ F					
0.068 μ F					
0.1 μ F					8.5x17.5x26.0
0.15 μ F					9.5x18.5x26.0
0.22 μ F				9.0x16.5x26.0	10.0x23.5x26.0
0.33 μ F				9.5x18.5x26.0	
0.47 μ F				10.5x22.5x26.0	
0.68 μ F			8.5x20.5x26.0		
1 μ F			9.0x22.5x26.0		
1.5 μ F		8.5x15.5x26.0			
2.2 μ F		9.5x16.5x26.0			
3.3 μ F		11.5x20.5x26.0			
4.7 μ F					
6.8 μ F					

A-05-17-05


I 5150-

I 5154

SIEMENS AKTIENGESELLSCHAFT 47E D


Insulation resistance
as a function of temperature
(Typical values, measured at 25°C)

U_R	$C \leq 0.33 \mu F$	$C > 0.33 \mu F$
100 V	$> 15000 M\Omega$	5000 s
250 V		
400 V	$> 30000 M\Omega$	$> 10000 s$

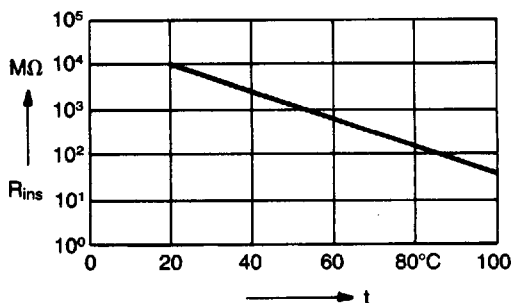

Category voltage U_c
at ac/dc operation
as a function of temperature t
(50 Hz ac operation)

max. 2000 hours $1.25 \times U_c$

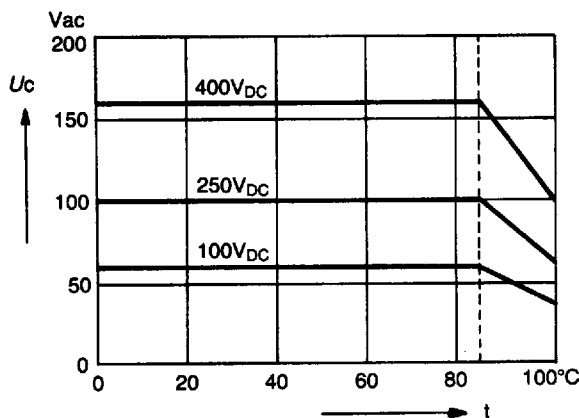

Reversible capacitance change $\frac{\Delta C}{C}$
as a function of temperature at 1 kHz
(Typical values)

