



DO-214AC(SMA)

Primary Characteristics

V_{BR}	5~440V
P_{PPM}	400W
P_D	1W
$T_J \text{ max}$	150°C

Features

- Glass passivated chip
- 400 W peak pulse power capability with a 10/1000 μ s waveform, repetitive rate (duty cycle):0.01 %
- Low leakage
- Uni and Bidirectional unit
- Excellent clamping capability
- Very fast response time
- RoHS compliant

Mechanical Date

- Case: DO-214AC(SMA)
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Solderable per MIL-STD-750, method 2026
- Polarity: cathode band except Bipolar
- Mounting position: Any
- Weight: 0.063 grams (approximate)

Ordering Information

Part No.	Remark	Package	Packing
SMAJ SERIES	General	SMA	5000 / Tape & Reel
SMAJ SERIES-H	Halogen Free		
SMAJ SERIES-Q	AEC-Q101 qualified		

Maximum Ratings (TA=25°C unless otherwise noted)

Parameter	Symbol	Limits	Units
Peak power dissipation with a 10/1000 μ s waveform (Note 1)	P_{PP}	400	W
Peak pulse current with a 10/1000 μ s waveform (Note 1)	I_{PP}	See Next Table	A
Power dissipation on infinite heatsink at TL = 75 °C	P_D	1	W
Peak forward surge current, 8.3 ms single half sine-wave unidirectional only (Note 2)	I_{FSM}	40	A
Maximum instantaneous forward voltage at 25 A for unidirectional only (Note 3)	V_F	3.5 / 5.0	V
Operating junction and storage temperature range	T_J, T_{STG}	-55 ~ +150	°C

Note:

(1)Non-repetitive current pulse per Fig.5 and derated above $T_A = 25^\circ\text{C}$ per Fig.1

(2)Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum

(3) $V_F < 3.5\text{V}$ for devices of $V_{BR} < 200\text{V}$ and $V_F < 5.0\text{V}$ for devices of $V_{BR} > 201\text{V}$



Transient Voltage Suppressors(400W)

Part Number		Marking Code		Breakdown Voltage V_{BR} @ I_T			Maximum Reverse Leakage I_R	Working Peak Reverse Voltage	Maximum Reverse Surge Current	Maximum Clamping Voltage V_C
Directional		Directional		Min	Max	I_T	V_{RWM}	V_{RWM}	I_{PP}	I_{PP}
Uni	Bi	Uni	Bi	(V)	(V)	(mA)	(μA)	(V)	(A)	(V)
SMAJ5.0A	SMAJ5.0CA	AJ5.0A	AJ5.0CA	6.40	7.00	10.0	800	5.0	43.48	9.2
SMAJ6.0A	SMAJ6.0CA	AJ6.0A	AJ6.0CA	6.67	7.37	10.0	800	6.0	38.83	10.3
SMAJ6.5A	SMAJ6.5CA	AJ6.5A	AJ6.5CA	7.22	7.98	10.0	500	6.5	35.71	11.2
SMAJ7.0A	SMAJ7.0CA	AJ7.0A	AJ7.0CA	7.78	8.60	10.0	200	7.0	33.30	12.0
SMAJ7.5A	SMAJ7.5CA	AJ7.5A	AJ7.5CA	8.33	9.21	1.0	100	7.5	31.01	12.9
SMAJ8.0A	SMAJ8.0CA	AJ8.0A	AJ8.0CA	8.89	9.83	1.0	50	8.0	29.41	13.6
SMAJ8.5A	SMAJ8.5CA	AJ8.5A	AJ8.5CA	9.44	10.40	1.0	10	8.5	27.78	14.4
SMAJ9.0A	SMAJ9.0CA	AJ9.0A	AJ9.0CA	10.00	11.10	1.0	5	9.0	25.97	15.4
SMAJ10A	SMAJ10CA	AJ10A	AJ10CA	11.10	12.30	1.0	5	10.0	23.50	17.0
SMAJ11A	SMAJ11CA	AJ11A	AJ11CA	12.20	13.50	1.0	5	11.0	21.98	18.2
SMAJ12A	SMAJ12CA	AJ12A	AJ12CA	13.30	14.70	1.0	5	12.0	20.10	19.9
SMAJ13A	SMAJ13CA	AJ13A	AJ13CA	14.40	15.90	1.0	5	13.0	18.60	21.5
SMAJ14A	SMAJ14CA	AJ14A	AJ14CA	15.60	17.20	1.0	5	14.0	17.24	23.2
SMAJ15A	SMAJ15CA	AJ15A	AJ15CA	16.70	18.50	1.0	5	15.0	16.39	24.4
SMAJ16A	SMAJ16CA	AJ16A	AJ16CA	17.80	19.70	1.0	5	16.0	15.38	26.0
SMAJ17A	SMAJ17CA	AJ17A	AJ17CA	18.90	20.90	1.0	5	17.0	14.49	27.6
SMAJ18A	SMAJ18CA	AJ18A	AJ18CA	20.00	22.10	1.0	5	18.0	13.70	29.2
SMAJ19A	SMAJ19CA	AJ19A	AJ19CA	21.10	23.30	1.0	5	19.0	13.00	30.8
SMAJ20A	SMAJ20CA	AJ20A	AJ20CA	22.20	24.50	1.0	5	20.0	12.30	32.4
SMAJ22A	SMAJ22CA	AJ22A	AJ22CA	24.40	26.90	1.0	5	22.0	11.27	35.5
SMAJ24A	SMAJ24CA	AJ24A	AJ24CA	26.70	29.50	1.0	5	24.0	10.28	38.9
SMAJ26A	SMAJ26CA	AJ26A	AJ26CA	28.90	31.90	1.0	5	26.0	9.50	42.1
SMAJ28A	SMAJ28CA	AJ28A	AJ28CA	31.10	34.40	1.0	5	28.0	8.81	45.4
SMAJ30A	SMAJ30CA	AJ30A	AJ30CA	33.30	36.80	1.0	5	30.0	8.26	48.4
SMAJ33A	SMAJ33CA	AJ33A	AJ33CA	36.70	40.60	1.0	5	33.0	7.50	53.3
SMAJ36A	SMAJ36CA	AJ36A	AJ36CA	40.00	44.20	1.0	5	36.0	6.88	58.1
SMAJ40A	SMAJ40CA	AJ40A	AJ40CA	44.40	49.10	1.0	5	40.0	6.20	64.5
SMAJ43A	SMAJ43CA	AJ43A	AJ43CA	47.80	52.80	1.0	5	43.0	5.76	69.4
SMAJ45A	SMAJ45CA	AJ45A	AJ45CA	50.00	55.30	1.0	5	45.0	5.50	72.7
SMAJ48A	SMAJ48CA	AJ48A	AJ48CA	53.30	58.90	1.0	5	48.0	5.17	77.4
SMAJ51A	SMAJ51CA	AJ51A	AJ51CA	56.70	62.70	1.0	5	51.0	4.85	82.4
SMAJ54A	SMAJ54CA	AJ54A	AJ54CA	60.00	66.30	1.0	5	54.0	4.59	87.1
SMAJ58A	SMAJ58CA	AJ58A	AJ58CA	64.40	71.20	1.0	5	58.0	4.27	93.6
SMAJ60A	SMAJ60CA	AJ60A	AJ60CA	66.70	73.70	1.0	5	60.0	4.13	96.8
SMAJ64A	SMAJ64CA	AJ64A	AJ64CA	71.10	78.60	1.0	5	64.0	3.88	103.0
SMAJ70A	SMAJ70CA	AJ70A	AJ70CA	77.80	86.00	1.0	5	70.0	3.54	113.0
SMAJ75A	SMAJ75CA	AJ75A	AJ75CA	83.30	92.10	1.0	5	75.0	3.31	121.0
SMAJ78A	SMAJ78CA	AJ78A	AJ78CA	86.70	95.80	1.0	5	78.0	3.17	126.0
SMAJ80A	SMAJ80CA	AJ80A	AJ80CA	88.80	97.60	1.0	5	80.0	3.09	129.6
SMAJ85A	SMAJ85CA	AJ85A	AJ85CA	94.40	104.00	1.0	5	85.0	2.92	137.0



SMAJ SERIES



Transient Voltage Suppressors(400W)

Part Number		Marking Code		Breakdown Voltage V_{BR} @ I_T			Maximum Reverse Leakage I_R	Working Peak Reverse Voltage	Maximum Reverse Surge Current	Maximum Clamping Voltage V_C
Directional		Directional		Min	Max	I_T	V_{RWM}	V_{RWM}	I_{PP}	I_{PP}
Uni	Bi	Uni	Bi	(V)	(V)	(mA)	(μA)	(V)	(A)	(V)
SMAJ90A	SMAJ90CA	AJ90A	AJ90CA	100.00	111.00	1.0	5	90.0	2.74	146.0
SMAJ100A	SMAJ100CA	AJ100A	AJ100CA	111.00	123.00	1.0	5	100.0	2.47	162.0
SMAJ110A	SMAJ110CA	AJ110A	AJ110CA	122.00	135.00	1.0	5	110.0	2.26	177.0
SMAJ120A	SMAJ120CA	AJ120A	AJ120CA	133.00	147.00	1.0	5	120.0	2.07	193.0
SMAJ130A	SMAJ130CA	AJ130A	AJ130CA	144.00	159.00	1.0	5	130.0	1.91	209.0
SMAJ140A	SMAJ140CA	AJ140A	AJ140CA	155.00	171.00	1.0	5	140.0	1.76	227.0
SMAJ150A	SMAJ150CA	AJ150A	AJ150CA	167.00	185.00	1.0	5	150.0	1.65	243.0
SMAJ160A	SMAJ160CA	AJ160A	AJ160CA	178.00	197.00	1.0	5	160.0	1.54	259.0
SMAJ170A	SMAJ170CA	AJ170A	AJ170CA	189.00	209.00	1.0	5	170.0	1.45	275.0
SMAJ180A	SMAJ180CA	AJ180A	AJ180CA	200.00	220.00	1.0	5	180.0	1.37	292.0
SMAJ190A	SMAJ190CA	AJ190A	AJ190CA	211.00	232.00	1.0	5	190.0	1.30	308.0
SMAJ200A	SMAJ200CA	AJ200A	AJ200CA	224.00	247.00	1.0	5	200.0	1.23	324.0
SMAJ220A	SMAJ220CA	AJ220A	AJ220CA	246.00	272.00	1.0	5	220.0	1.12	356.0
SMAJ250A	SMAJ250CA	AJ250A	AJ250CA	279.00	309.00	1.0	5	250.0	0.99	405.0
SMAJ300A	SMAJ300CA	AJ300A	AJ300CA	335.00	371.00	1.0	5	300.0	0.82	486.0
SMAJ350A	SMAJ350CA	AJ350A	AJ350CA	391.00	432.00	1.0	5	350.0	0.71	567.0
SMAJ400A	SMAJ400CA	AJ400A	AJ400CA	447.00	494.00	1.0	5	400.0	0.62	648.0
SMAJ440A	SMAJ440CA	AJ440A	AJ440CA	492.00	543.00	1.0	5	440.0	0.56	713.0

Note:

1. Suffix 'A ' denotes 5% tolerance device.
2. Add suffix ' C ' after part number to specify Bi-directional devices.
3. For Bi-Directional devices having VR of 10 volts and under, the IR limit is double .



Rating and Characteristics Curves

Fig. 1 - Pulse Derating Curve

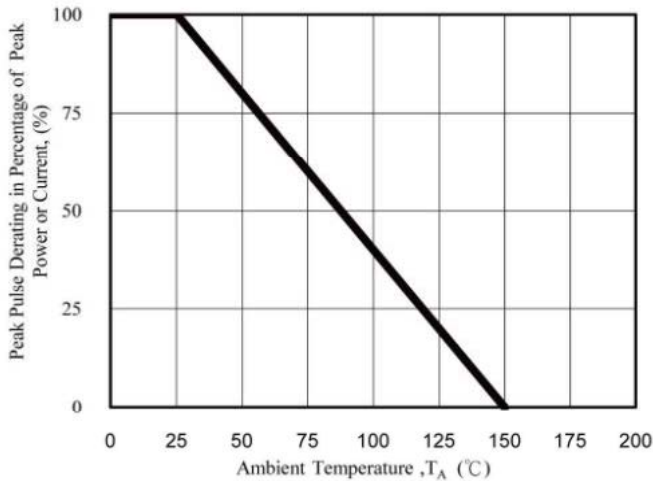


Fig. 2 - Maximum Non-Repetitive Surge Current

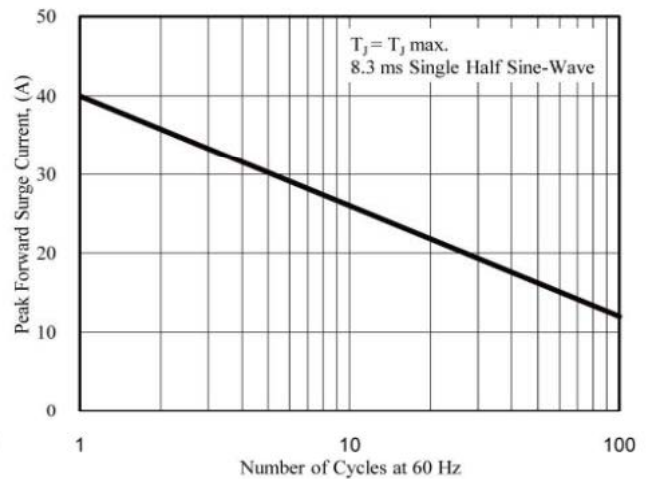


Fig. 3 - Steady State Power Derating Curve

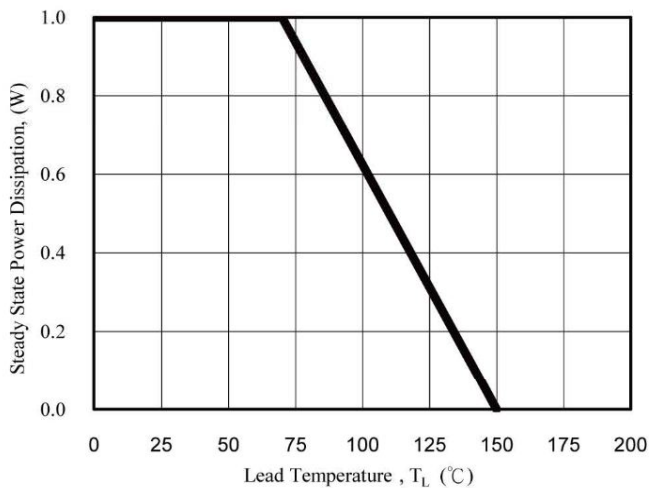


Fig. 4 - Peak Pulse Power Rating Curve

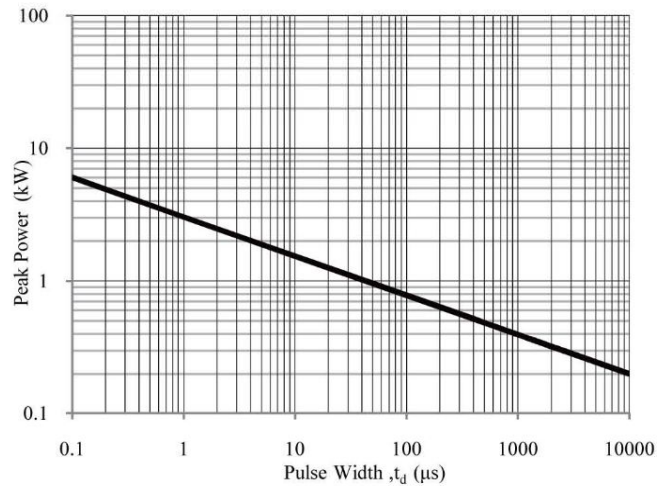


Fig. 5 - Pulse Waveform


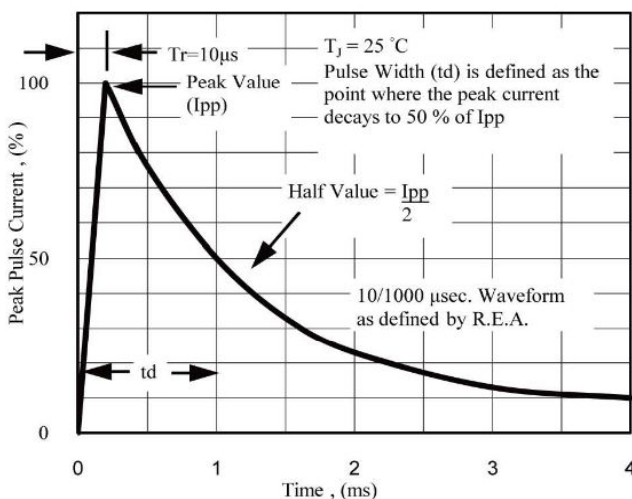


Fig. 6 - Typical junction Capacitance






SMAJ SERIES

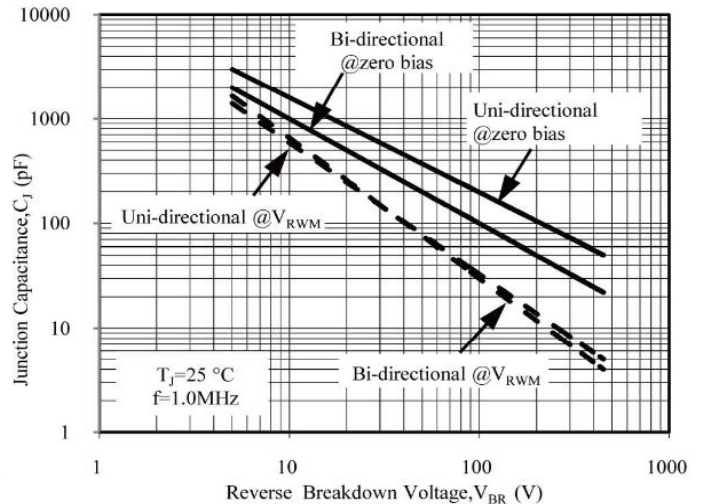

Transient Voltage Suppressors(400W)

Package Outline Dimensions

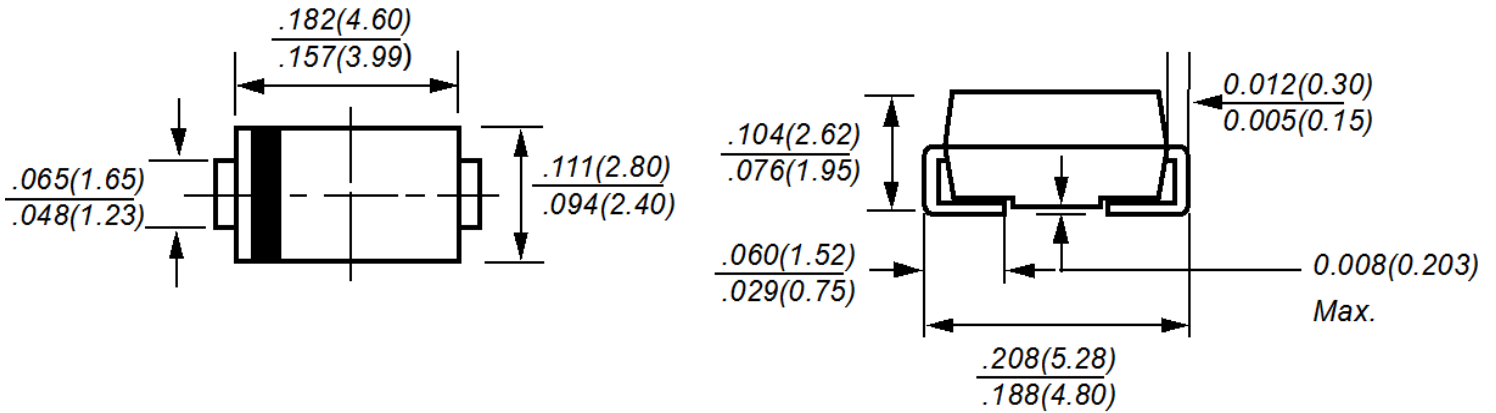


DO-214AC(SMA)

Dimensions in inches and (millimeters)


Suggested Pad Layout

Outline Dimension	SMA (DO-214AC)
A	6.50
B	1.50
C	1.70
D	2.50
E	4.00



Tape & Reel Specification

Item	Symbol	Dimension
		Unit (mm)
Carrier width	A	2.9(max)
Carrier length	B	5.9(max)
Carrier depth	C	2.66(max)
Sprocket hole	d	1.50±0.1
Reel outside diameter	D	330±2.0
Feed hole diameter	D0	13.5±1
Reel inner diameter	D1	50 (min.)
Sprocket hole position	E	1.75±0.1
Punch hole position	F	5.5±0.05
Sprocket hole pitch	P	4.0±0.1
Sprocket hole pitch	Po	4.0±0.1
Embossment center	P1	2.0±0.05
Overall tape thickness	T	0.6 (max)
Tape width	W	12.0±0.3
Reel width	W2	18.4(max)
Reel width	W1	14.4(max)

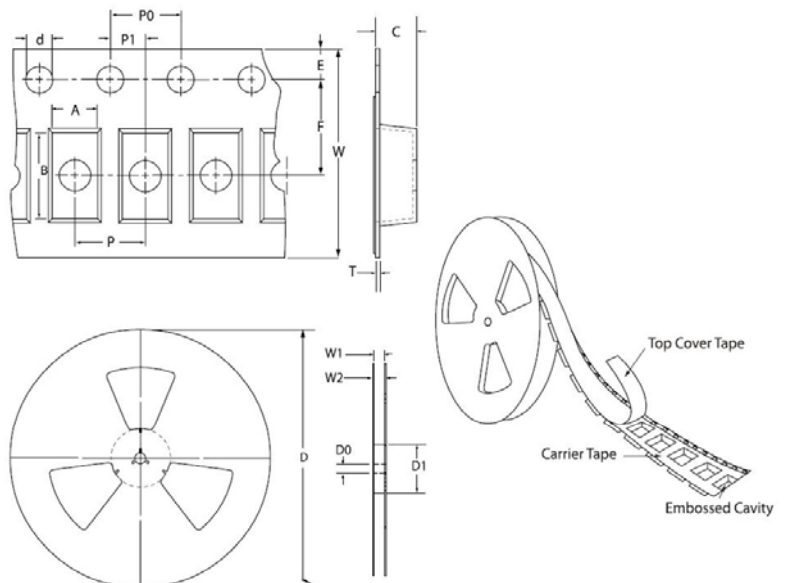



LEGAL DISCLAIMER

- The product is provided “AS IS” without any guarantees or warranty. In association with the product, Eris Technology Corporation, its affiliates, and their directors, officers, employees, agents, successors and assigns (collectively, the “Eris”) makes no warranties of any kind, either express or implied, including but not limited to warranties of merchantability, fitness for a particular purpose, of title, or of non-infringement of third party rights.
- The information in this document and any product described herein are subject to change without notice and should not be construed as a commitment by Eris. Eris assumes no responsibility for any errors that may appear in this document.
- Eris does not assume any liability arising out of the application or use of this document or any product described herein, any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Eris and all the companies whose products are represented on Eris website, harmless against all damages.
- No license, express or implied, by estoppels or otherwise, to any intellectual property is granted by this document or by any conduct of Eris. Product name and markings notes herein may be trademarks of their respective owners.
- Eris does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
- Should Customers purchase or use Eris products for any unintended or unauthorized application, Customers shall indemnify and hold Eris and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.
- The official text is written in English and the English version of this document is the only version endorsed by Eris. Any discrepancies or differences created in the translations are not binding and have no legal effect on Eris for compliance or enforcement purposes.