






P.C.B MOUNTING



CIRCUIT: SPST

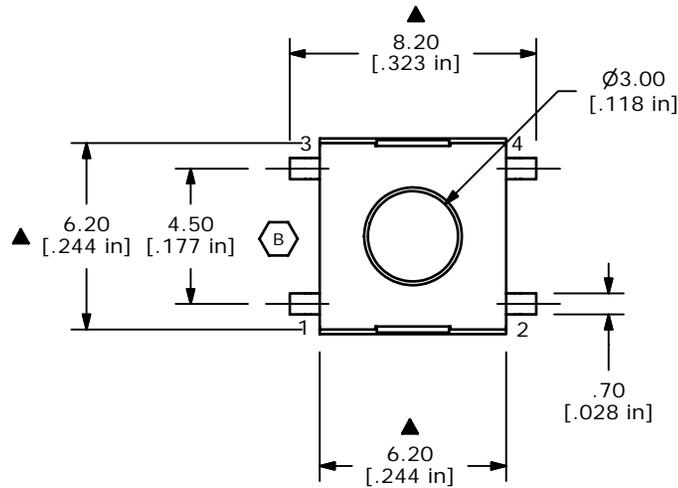

ISOMETRIC

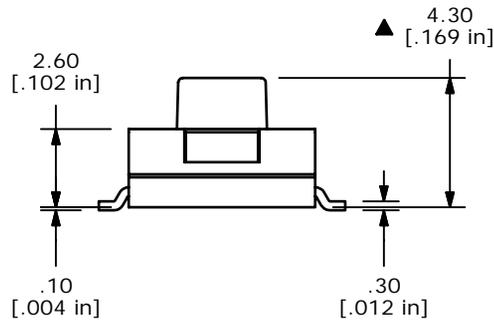

TERMINALS TO BE COLPLANAR WITH IN 0.10mm

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY.
4. TRAVEL: 0.25mm +0.2/-0.1
5. RATING: 50mA, 12VDC
6. OPERATING FORCE: 100± 50gf
7. CONTACT RESISTANCE: 100M OHM MAX.
8. ▲ DENOTES CRITICAL PARAMETER
- ▲9. PACKAGING: TAPE AND REEL 1,200 PCS PER
- ▲10. 2002/95/EC (ROHS) COMPLIANT

| | | | | |
|-----|--------|-------------------------|----------|-----|
| B | 19516 | CHANGE COVER TO TL3303 | 12/10/10 | BGL |
| A | 19438 | RELEASED FOR PRODUCTION | 11/15/10 | BMA |
| REV | PCR NO | DESCRIPTION | DATE | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

| | | | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----|---------|-----|
|   | | | | |
| TITLE TL3303AF100QG | | | | |
| SCALE | DATE | DR | DWG | REV |
| 4:1 | 11/15/2010 | BA | P020335 | B |