


CONTACT CONFIGURATION
TIMING (BBM) NON-SHORTINGHEX NUT AND WASHER
NOT SHOWN
IN VIEWØ26.00
[1.024 in]KC52A9.501NPF
(G511002)

SLOT 11

LOCKING RING
▲ (G200000)Ø3.00
[.118 in]

NOTE:

1. ALL DIMENSIONS IN MM[INCH].
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲4. CONTACT MATERIAL: GOLD FLASH OVER SILVER
5. CONTACT RATING: 150MILLIAMP, 250VAC/DC
350MILLIAMP, 110VAC/DC
6. CONTACT RATING (NON-SWITCHING) 5A
7. OPERATING FORCE 425± 100CM/STANDARD
8. OPERATING TEMP: -30°C TO 85°C
- ▲9. CIRCUIT SP: 12 POSITION 30° INDEX.
10. DIELECTRIC STRENGTH: 1000V RMS MIN.@ SEA LEVEL.
- ▲11. HARDWARE SUPPLIED ON SWITCH:
LOCKWASHER, HEXNUT, STOP RING (TAB IN POSITION 11)
12. ▲ DENOTES CRITICAL PARAMETER.
13. 2002/95/EC (ROHS) COMPLIANT

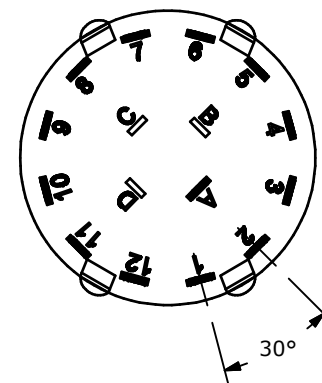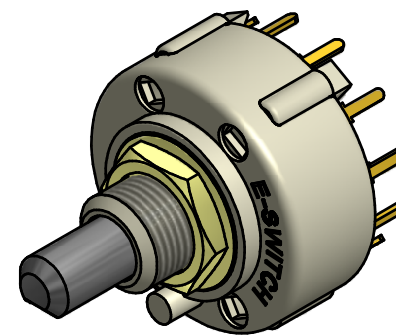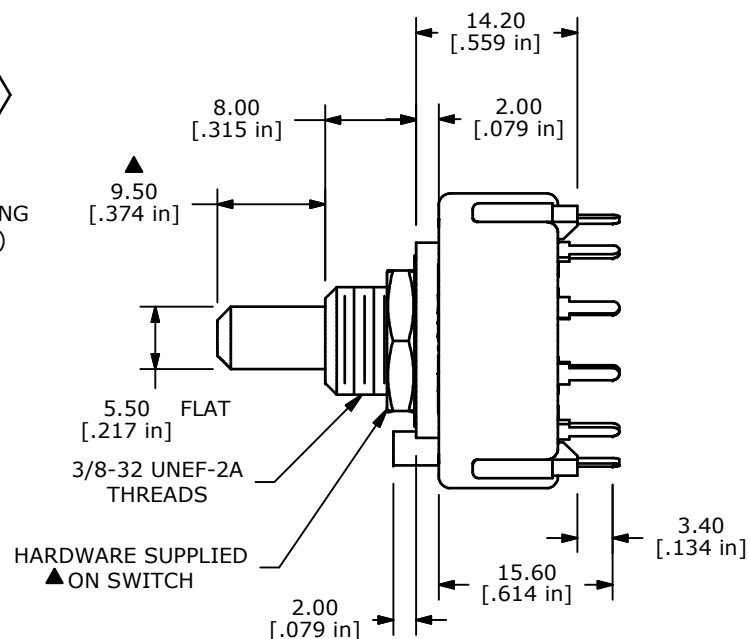

B	21392	CORRECT BASE SWITCH PART NUMBER	3/4/14	EBP
A	19055	RELEASED FOR PRODUCTION	5/10/10	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE KC52A9.501NPF W/LOCKRING

SCALE 1.5:1

DATE 5/10/2010

DR rc

DWG XG0006P

REV B