



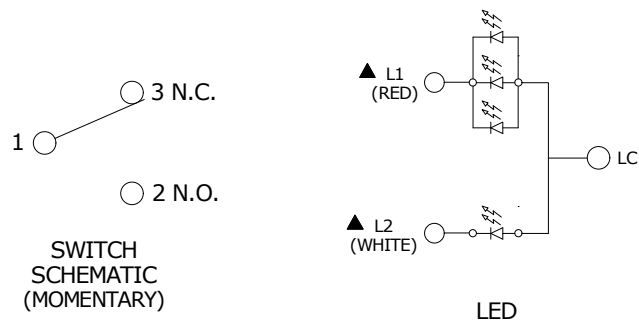

CIRCUIT LAYOUT




PANEL MOUNTING	
PANEL THICK	W
0.75 - 1.25	17.6 - 17.8
1.25 - 2.0	17.8 - 18.0
2.0 - 3.0	18.0 - 18.2




PANEL MOUNTING

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATING: 0.1A MAX. @ 28VDC
5. CONTACT MATERIAL: GOLD
6. ELECTRICAL LIFE: 200,000 Typical
7. MECHANICAL LIFE: 200,000 CYCLES TYP.
8. CONTACT RESISTANCE: 100 MILLI OHM INITIAL TYP. MAX.
9. DIELECTRIC STRENGTH: 1000 VAC FOR 1 MIN.
10. TRAVEL TO MAKE: 2.20mm ± 0.2
11. OPERATING FORCE: 200 +/- 100gf
12. OPERATING TEMPERATURE: -40° to +85°C
13. 2011/65/EU (ROHS) COMPLIANT
14. ▲ DENOTES CRITICAL PARAMETER
15. LED COLOR: RED: 3 CHIPS; 1.95VDC @20mA TYP.
WHT: 1 CHIP; 3.3VDC @20mA TYP.

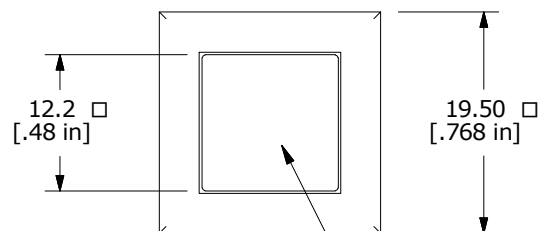

▲ CLEAR CAP
WITH
WHITE DIFFUSER

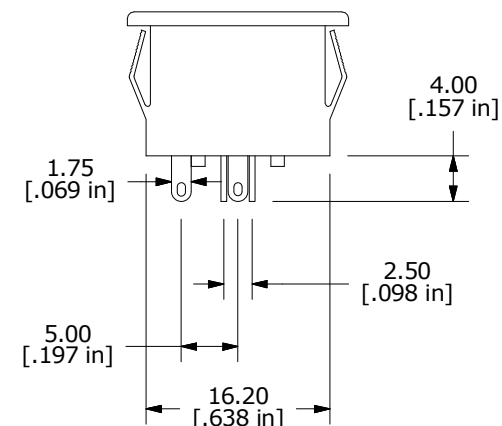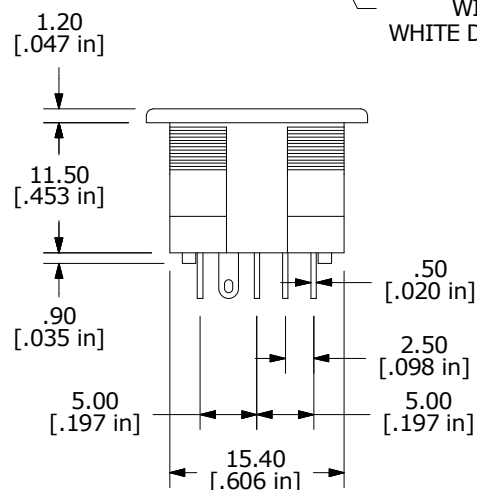

TITLE ULP12OAM1RPMCL1REDWHT

SCALE 3:2

DATE 5/2/2017

DR MW

DWG B800077

REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

A	22830	Release for Production	5/4/17	MW
REV	PCR NO	DESCRIPTION	DATE	BY