
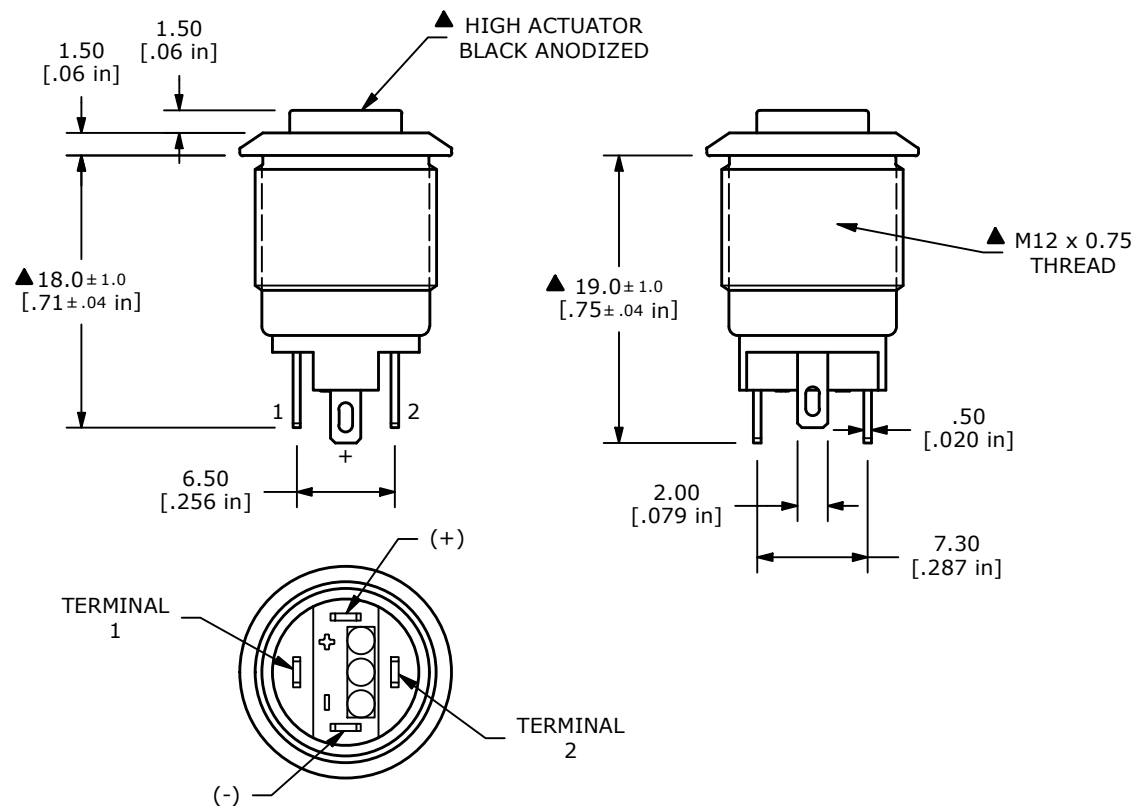


▲ SWITCH FUNCTION

POS. 1	POS. 2
OFF	(ON)
OPEN	1-2

(ON) = MOMENTARY



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NOS. FOR REF. ONLY
- RATING: 2A @ 36VDC
- CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
- INSULATION RESISTANCE: 1,000MΩ @ 500VDC
- DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
- ELECTRICAL LIFE: 200,000 CYCLES
- CONTACT MATERIAL: SILVER
- OPERATING TEMPERATURE: -20°C to 55°C
- INGRESS PROTECTION: IP65
- ▲ 12. LED VOLTAGE: WHITE-2.8V 20mA, RED-1.8V 20mA
- ▲ 13. ▲ DENOTES CRITICAL PARAMETER
14. HARDWARE INCLUDED: HEX NUT AND O-RING (NOT SHOWN)



B	24582	HOUSING UPDATE	11/9/20	JM
A	23767	Release	2/12/19	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE PV0H24011-3A1

SCALE 2:1

DATE 2/12/2019

DR MW

DWG 52-PV0H240113A1

REV B