
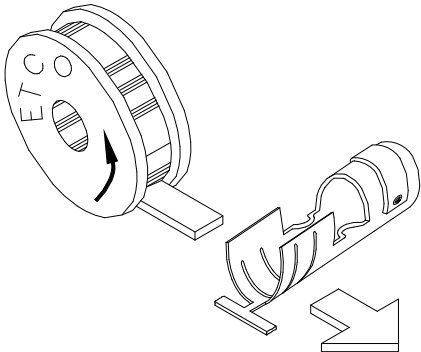

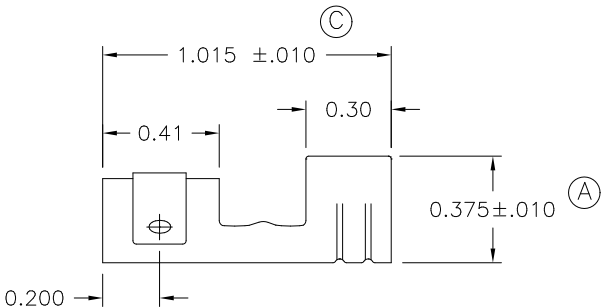



CUSTOMER PRINT


(B)

FOR MAXIMUM PERFORMANCE AND RELIABILITY,
ALWAYS USE ETCO ENGINEERED IGNITION TERMINALS
WITH ETCO AUTOMOTIVE INSULATORS.

NOTE:
PART MAY BE COATED WITH A LIGHT
FILM OF LUBRICATION USED IN THE
MANUFACTURING PROCESS.



DIRECTION OF FEED
FROM REEL
TOWARD APPLICATION

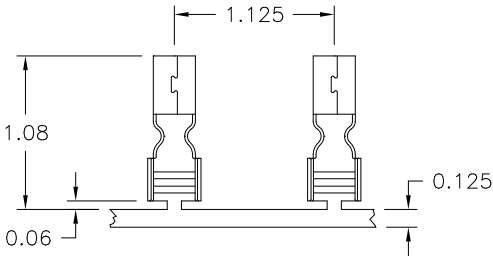

REV.	DESCRIPTION	DATE	TOLERANCES UNLESS SPECIFIED	
			.000 ± .005	FRACTIONS ±
A	ADDED ±0.010, OMIT RIB NOTE	3/23/92	.00 ± .010	ANGLES ± 2°
B	ADD TAPERED RIB, NOTE	7/16/93	DO NOT SCALE DRAWING	
C	1.015 ±.010 WAS 1.02	10/3/94	ETCO INCORPORATED AUTOMOTIVE DIVISION 3004 62ND AVENUE EAST BRADENTON, FLORIDA 34203 (941) 756-8426	
			SPARK PLUG TERMINAL	
			MATERIAL .020 BZS	DATE 5-4-89
			DRAWN BY CNP	CHECKED BY
			SCALE 2:1 1:1	PART NO. SP10