



## FDV303N Digital FET, N-Channel

### General Description



These N-Channel enhancement mode field effect transistors are produced using Fairchild's proprietary, high cell density, DMOS technology. This very high density process is tailored to minimize on-state resistance at low gate drive conditions. This device is designed especially for application in battery circuits using either one lithium or three cadmium or NMH cells. It can be used as an inverter or for high-efficiency miniature discrete DC/DC conversion in compact portable electronic devices like cellular phones and pagers. This device has excellent on-state resistance even at gate drive voltages as low as 2.5 volts.

### Features

- 25 V, 0.68 A continuous, 2 A Peak.  
 $R_{DS(ON)} = 0.45 \Omega @ V_{GS} = 4.5 V$   
 $R_{DS(ON)} = 0.6 \Omega @ V_{GS} = 2.7 V$ .
- Very low level gate drive requirements allowing direct operation in 3V circuits.  $V_{GS(th)} < 1V$ .
- Gate-Source Zener for ESD ruggedness.>6kV Human Body Model
- Compact industry standard SOT-23 surface mount package.
- Alternative to TN0200T and TN0201T.



Mark:303



### Absolute Maximum Ratings $T_A = 25^\circ C$ unless other wise noted

| Symbol         | Parameter                                                                       | FDV303N    | Units      |
|----------------|---------------------------------------------------------------------------------|------------|------------|
| $V_{DSS}$      | Drain-Source Voltage, Power Supply Voltage                                      | 25         | V          |
| $V_{GSS}$      | Gate-Source Voltage, $V_{IN}$                                                   | 8          | V          |
| $I_D$          | Drain/Output Current - Continuous                                               | 0.68       | A          |
|                | - Pulsed                                                                        | 2          |            |
| $P_D$          | Maximum Power Dissipation                                                       | 0.35       | W          |
| $T_J, T_{STG}$ | Operating and Storage Temperature Range                                         | -55 to 150 | $^\circ C$ |
| ESD            | Electrostatic Discharge Rating MIL-STD-883D Human Body Model (100pf / 1500 Ohm) | 6.0        | kV         |

### THERMAL CHARACTERISTICS

|                 |                                         |     |              |
|-----------------|-----------------------------------------|-----|--------------|
| $R_{\theta JA}$ | Thermal Resistance, Junction-to-Ambient | 357 | $^\circ C/W$ |
|-----------------|-----------------------------------------|-----|--------------|

## Electrical Characteristics (T<sub>A</sub> = 25 °C unless otherwise noted )

| Symbol                                                 | Parameter                                             | Conditions                                                                                                                  | Min  | Typ                  | Max                | Units    |
|--------------------------------------------------------|-------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|------|----------------------|--------------------|----------|
| OFF CHARACTERISTICS                                    |                                                       |                                                                                                                             |      |                      |                    |          |
| BV <sub>DSS</sub>                                      | Drain-Source Breakdown Voltage                        | V <sub>GS</sub> = 0 V, I <sub>D</sub> = 250 μA                                                                              | 25   |                      |                    | V        |
| ΔBV <sub>DSS</sub> /ΔT <sub>J</sub>                    | Breakdown Voltage Temp. Coefficient                   | I <sub>D</sub> = 250 μA, Referenced to 25 °C                                                                                |      | 26                   |                    | mV / °C  |
| I <sub>DSS</sub>                                       | Zero Gate Voltage Drain Current                       | V <sub>DS</sub> = 20 V, V <sub>GS</sub> = 0 V<br>T <sub>J</sub> = 55°C                                                      |      |                      | 1<br>10            | μA<br>μA |
| I <sub>GSS</sub>                                       | Gate - Body Leakage Current                           | V <sub>GS</sub> = 8 V, V <sub>DS</sub> = 0 V                                                                                |      |                      | 100                | nA       |
| ON CHARACTERISTICS (Note)                              |                                                       |                                                                                                                             |      |                      |                    |          |
| ΔV <sub>GS(th)</sub> /ΔT <sub>J</sub>                  | Gate Threshold Voltage Temp. Coefficient              | I <sub>D</sub> = 250 μA, Referenced to 25 °C                                                                                |      | -2.6                 |                    | mV / °C  |
| V <sub>GS(th)</sub>                                    | Gate Threshold Voltage                                | V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250 μA                                                                 | 0.65 | 0.8                  | 1                  | V        |
| R <sub>DS(ON)</sub>                                    | Static Drain-Source On-Resistance                     | V <sub>GS</sub> = 4.5 V, I <sub>D</sub> = 0.5 A<br>T <sub>J</sub> =125°C<br>V <sub>GS</sub> = 2.7 V, I <sub>D</sub> = 0.2 A |      | 0.33<br>0.52<br>0.44 | 0.45<br>0.8<br>0.6 | Ω        |
| I <sub>D(ON)</sub>                                     | On-State Drain Current                                | V <sub>GS</sub> = 2.7 V, V <sub>DS</sub> = 5 V                                                                              | 0.5  |                      |                    | A        |
| g <sub>FS</sub>                                        | Forward Transconductance                              | V <sub>DS</sub> = 5 V, I <sub>D</sub> = 0.5 A                                                                               |      | 1.45                 |                    | S        |
| DYNAMIC CHARACTERISTICS                                |                                                       |                                                                                                                             |      |                      |                    |          |
| C <sub>iss</sub>                                       | Input Capacitance                                     | V <sub>DS</sub> = 10 V, V <sub>GS</sub> = 0 V,<br>f = 1.0 MHz                                                               |      | 50                   |                    | pF       |
| C <sub>oss</sub>                                       | Output Capacitance                                    |                                                                                                                             |      | 28                   |                    | pF       |
| C <sub>rss</sub>                                       | Reverse Transfer Capacitance                          |                                                                                                                             |      | 9                    |                    | pF       |
| SWITCHING CHARACTERISTICS (Note)                       |                                                       |                                                                                                                             |      |                      |                    |          |
| t <sub>D(on)</sub>                                     | Turn - On Delay Time                                  | V <sub>DD</sub> = 6 V, I <sub>D</sub> = 0.5 A,<br>V <sub>GS</sub> = 4.5 V, R <sub>GEN</sub> = 50 Ω                          |      | 3                    | 6                  | ns       |
| t <sub>r</sub>                                         | Turn - On Rise Time                                   |                                                                                                                             |      | 8.5                  | 18                 | ns       |
| t <sub>D(off)</sub>                                    | Turn - Off Delay Time                                 |                                                                                                                             |      | 17                   | 30                 | ns       |
| t <sub>f</sub>                                         | Turn - Off Fall Time                                  |                                                                                                                             |      | 13                   | 25                 | ns       |
| Q <sub>g</sub>                                         | Total Gate Charge                                     | V <sub>DS</sub> = 5 V, I <sub>D</sub> = 0.5 A,<br>V <sub>GS</sub> = 4.5 V                                                   |      | 1.64                 | 2.3                | nC       |
| Q <sub>gs</sub>                                        | Gate-Source Charge                                    |                                                                                                                             |      | 0.38                 |                    | nC       |
| Q <sub>gd</sub>                                        | Gate-Drain Charge                                     |                                                                                                                             |      | 0.45                 |                    | nC       |
| DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS |                                                       |                                                                                                                             |      |                      |                    |          |
| I <sub>S</sub>                                         | Maximum Continuous Drain-Source Diode Forward Current |                                                                                                                             |      |                      | 0.3                | A        |
| V <sub>SD</sub>                                        | Drain-Source Diode Forward Voltage                    | V <sub>GS</sub> = 0 V, I <sub>S</sub> = 0.5 A (Note)                                                                        |      | 0.83                 | 1.2                | V        |

Note:

Pulse Test: Pulse Width ≤ 300μs, Duty Cycle ≤ 2.0%.

## Typical Electrical Characteristics

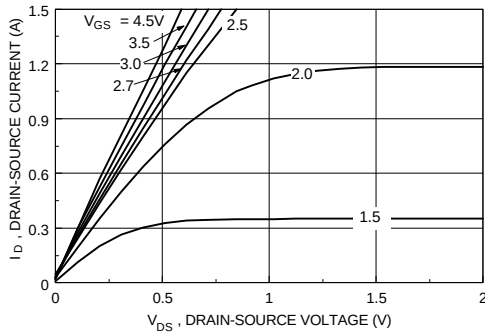


Figure 1. On-Region Characteristics.

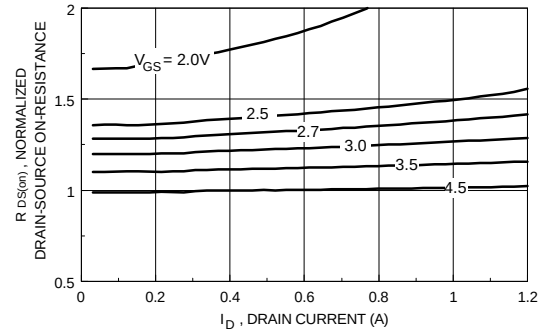


Figure 2. On-Resistance Variation with Drain Current and Gate Voltage.

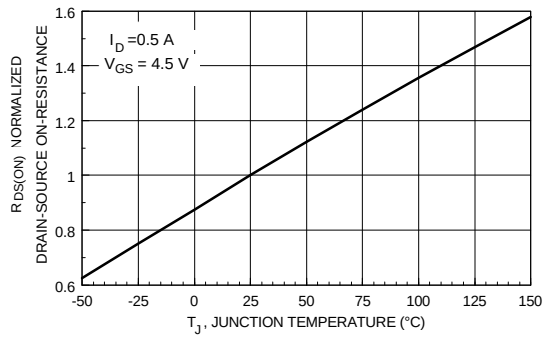


Figure 3. On-Resistance Variation with Temperature.

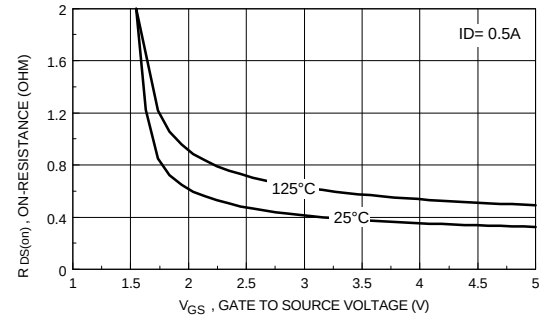


Figure 4. On Resistance Variation with Gate-To- Source Voltage.

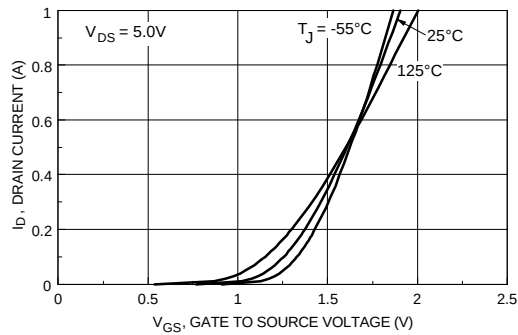


Figure 5. Transfer Characteristics.

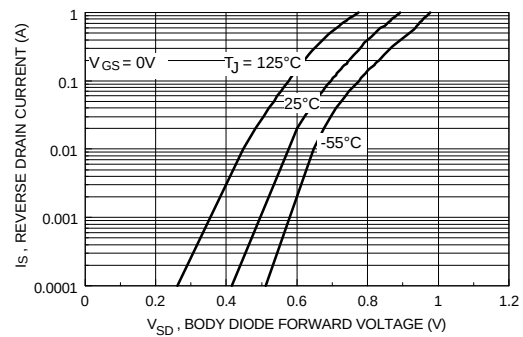


Figure 6. Body Diode Forward Voltage Variation with Source Current and Temperature.

## Typical Electrical And Thermal Characteristics

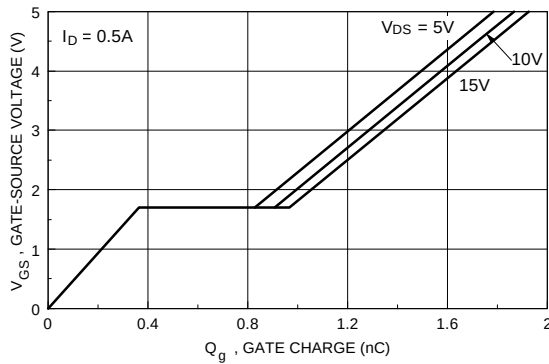


Figure 7. Gate Charge Characteristics.

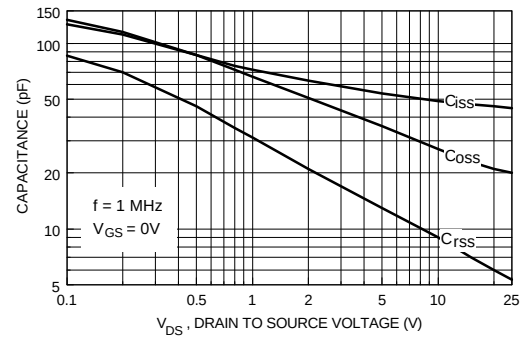


Figure 8. Capacitance Characteristics.

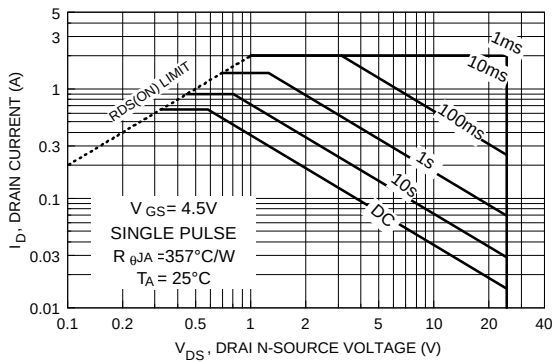


Figure 9. Maximum Safe Operating Area.

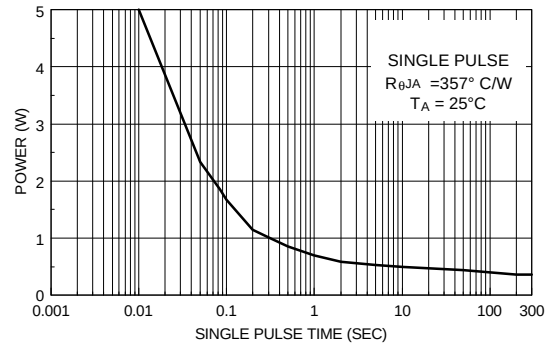


Figure 10. Single Pulse Maximum Power Dissipation.



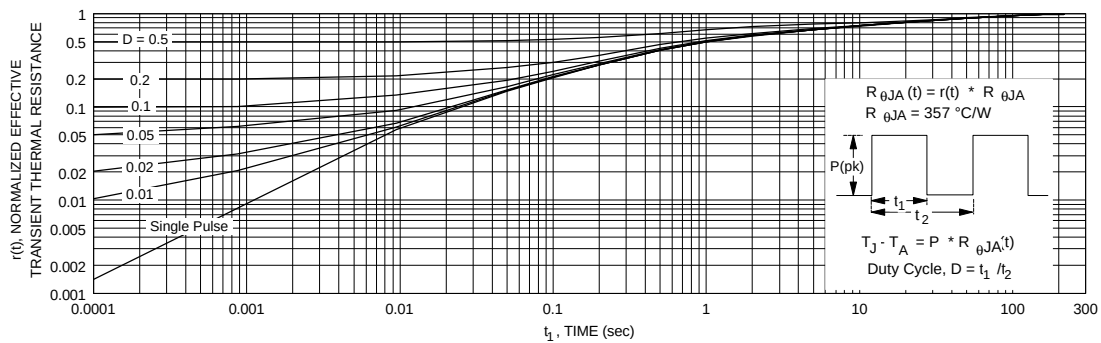



Figure 11. Transient Thermal Response Curve.

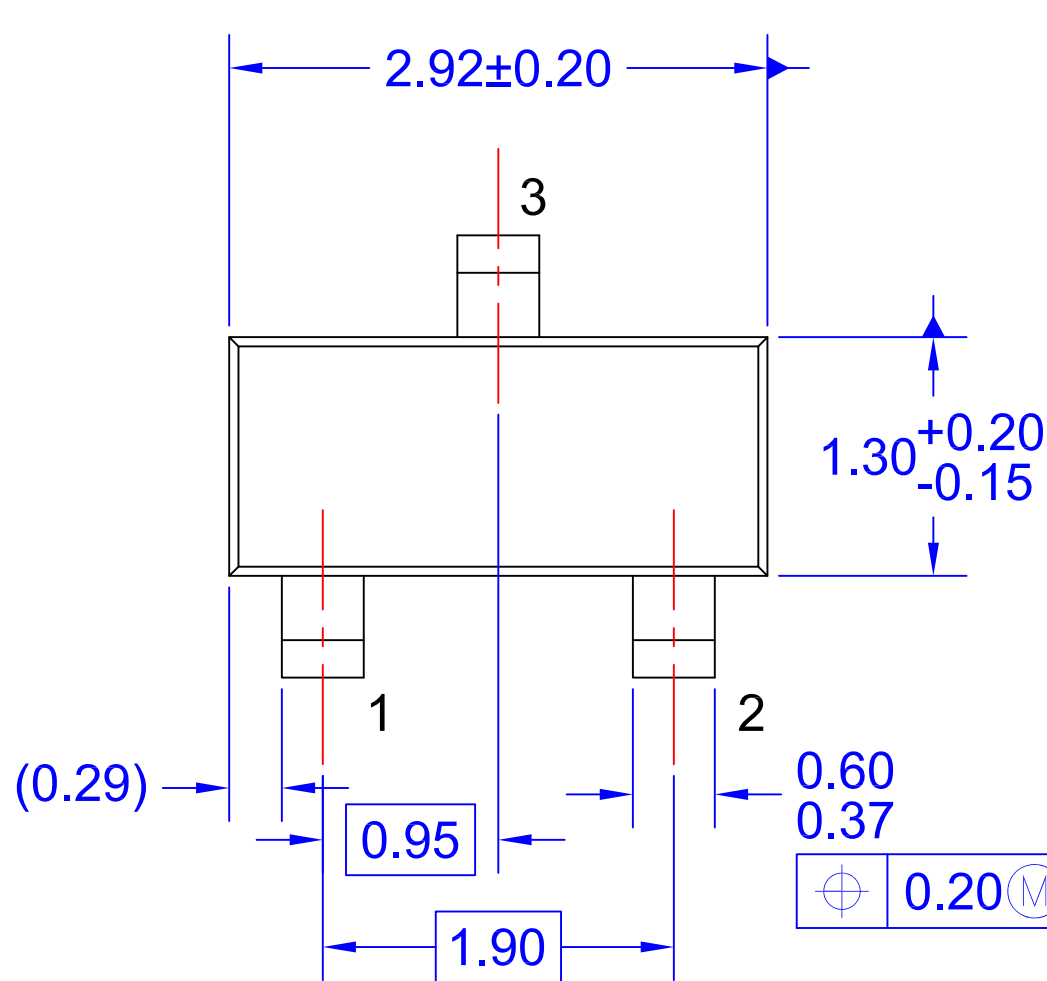



|          |          |   |   |
|----------|----------|---|---|
| $\oplus$ | 0.20 (M) | A | B |
|----------|----------|---|---|

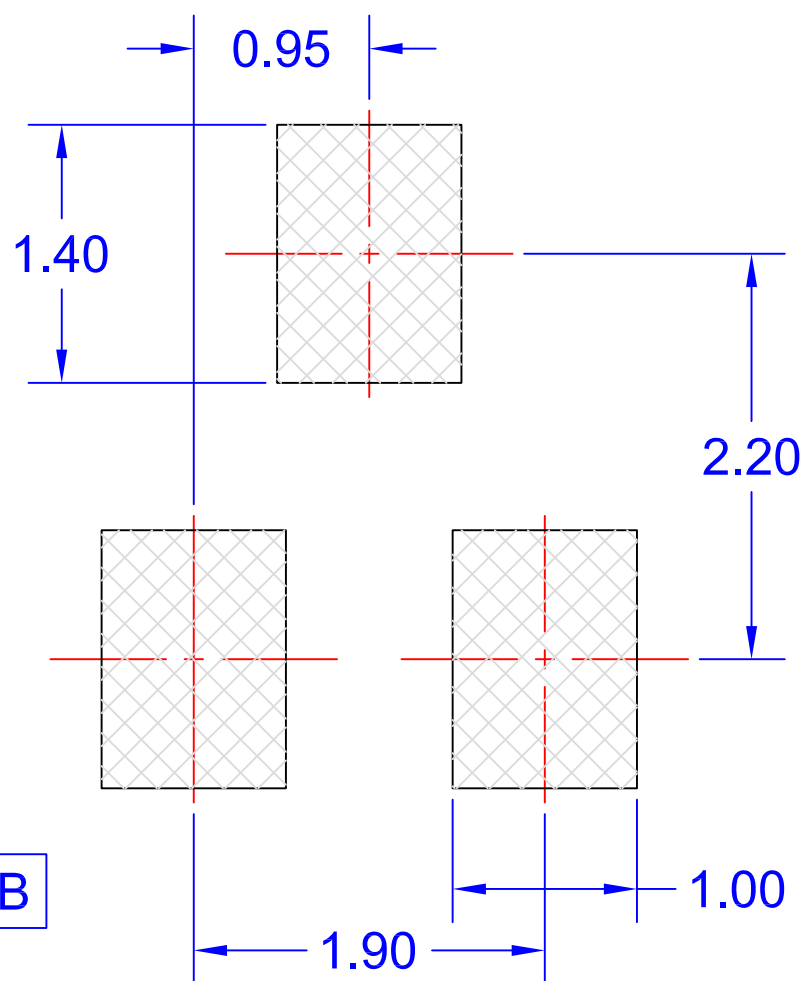

LAND PATTERN  
RECOMMENDATION

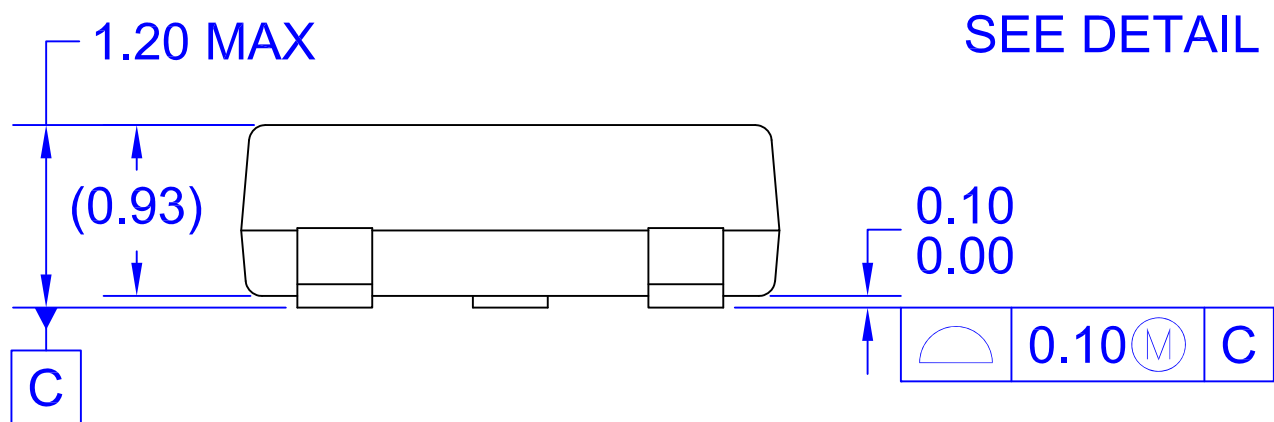

SEE DETAIL A

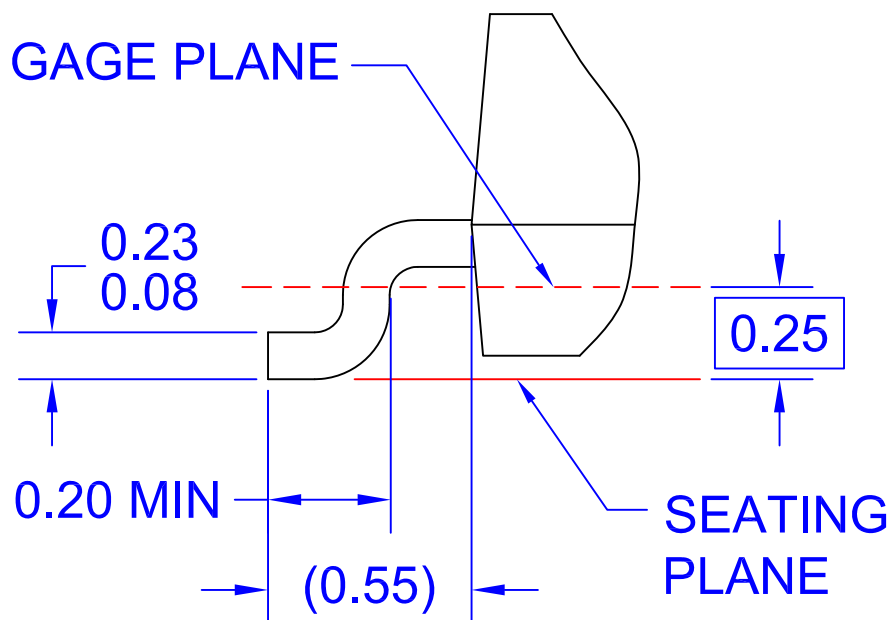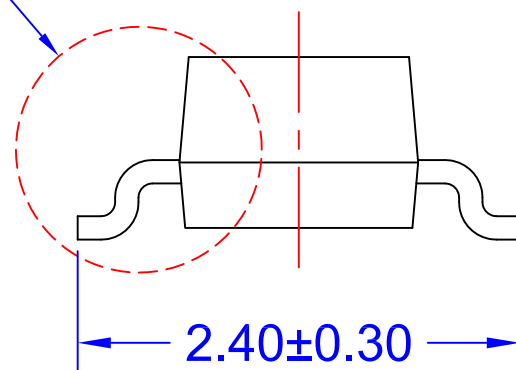

DETAIL A  
SCALE: 2X

NOTES: UNLESS OTHERWISE SPECIFIED

- A) REFERENCE JEDEC REGISTRATION TO-236, VARIATION AB, ISSUE H.
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS ARE INCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR EXTRUSIONS.
- D) DIMENSIONING AND TOLERANCING PER ASME Y14.5M - 2009.
- E) DRAWING FILE NAME: MA03DREV11





## TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™  
AttitudeEngine™  
Awinda®  
AX-CAP®\*  
BitSiC™  
Build it Now™  
CorePLUS™  
CorePOWER™  
CROSSVOLT™  
CTL™  
Current Transfer Logic™  
DEUXPEED®  
Dual Cool™  
EcoSPARK®  
EfficientMax™  
ESBC™  
F®  
Fairchild®  
Fairchild Semiconductor®  
FACT Quiet Series™  
FACT®  
FastvCore™  
FETBench™  
FPS™

F-PFS™  
FRFET®  
Global Power Resource™  
GreenBridge™  
Green FPS™  
Green FPS™ e-Series™  
Gmax™  
GTO™  
IntelliMAX™  
ISOPLANAR™  
Making Small Speakers Sound Louder and Better™  
MegaBuck™  
MICROCOUPLER™  
MicroFET™  
MicroPak™  
MicroPak2™  
MillerDrive™  
MotionMax™  
MotionGrid®  
MTI®  
MTX®  
MVN®  
mWSaver®  
OptoHit™  
OPTOLOGIC®

OPTOPLANAR®  
Power Supply WebDesigner™  
PowerTrench®  
PowerXS™  
Programmable Active Droop™  
QFET®  
QS™  
Quiet Series™  
RapidConfigure™  
Saving our world, 1mW/W/kW at a time™  
SignalWise™  
SmartMax™  
SMART START™  
Solutions for Your Success™  
SPM®  
STEALTH™  
SuperFET®  
SuperSOT™-3  
SuperSOT™-6  
SuperSOT™-8  
SupreMOS®  
SyncFET™  
Sync-Lock™

SYSTEM GENERAL®\*  
TinyBoost®  
TinyBuck®  
TinyCalc™  
TinyLogic®  
TINYOPTO™  
TinyPower™  
TinyPWM™  
TinyWire™  
TranSiC™  
TriFault Detect™  
TRUECURRENT®\*  
μSerDes™  
SerDes®  
UHC®  
Ultra FRFET™  
UniFET™  
VCX™  
VisualMax™  
VoltagePlus™  
XS™  
Xsens™  
仙童®

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT [HTTP://WWW.FAIRCHILDSEMI.COM](http://www.fairchildsemi.com). FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## AUTHORIZED USE

Unless otherwise specified in this data sheet, this product is a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability. This product may not be used in the following applications, unless specifically approved in writing by a Fairchild officer: (1) automotive or other transportation, (2) military/aerospace, (3) any safety critical application – including life critical medical equipment – where the failure of the Fairchild product reasonably would be expected to result in personal injury, death or property damage. Customer's use of this product is subject to agreement of this Authorized Use policy. In the event of an unauthorized use of Fairchild's product, Fairchild accepts no liability in the event of product failure. In other respects, this product shall be subject to Fairchild's Worldwide Terms and Conditions of Sale, unless a separate agreement has been signed by both Parties.

## ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Terms of Use

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status        | Definition                                                                                                                                                                                          |
|--------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production      | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production       | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.                                               |
| Obsolete                 | Not In Production     | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.                                                    |

Rev. I77