



## FXL2T245

# Low-Voltage, Dual-Supply, 2-Bit, Signal Translator with Configurable Voltage Supplies and Signal Levels and 3-State Outputs

### Features

- Bi-Directional Interface between any 2 Levels from 1.1 V to 3.6 V
- Fully Configurable, Inputs Track  $V_{CC}$  Level
- Non-Preferential Power-up Sequencing; either  $V_{CC}$  maybe Powered-up First
- Outputs Remain in 3-State until Active  $V_{CC}$  Level is Reached
- Outputs Switch to 3-State if either  $V_{CC}$  is at GND
- Power-Off Protection
- Control Inputs (T/R, OE) Levels are Referenced to  $V_{CCA}$  Voltage
- Packaged in 10-Lead MicroPak (1.6 mm x 2.1 mm) Package
- ESD Protection Exceeds:
  - 4 kV HBM ESD JESD22-A114 & Mil Std 883e 3015.7)
  - 8kV HBM I/O to GND ESD (per JESD22-A114 & Mil Std 883e 3015.7)
  - 1 kV CDM ESD (per ESD STM 5.3)
  - 200 V MM ESD (per JESD22-A115 & ESD STM5.2)

### Description

The FXL2T245 is a configurable, dual-voltage-supply translator designed for uni-directional and bi-directional voltage translation between two logic levels. The device allows translation between voltages as high as 3.6 V to as low as 1.1 V. The A port tracks the  $V_{CCA}$  level and the B port tracks the  $V_{CCB}$  level. This allows for bi-directional voltage translation over a variety of voltage levels: 1.2 V, 1.5 V, 1.8 V, 2.5 V, and 3.3 V.

The device remains in 3-state until both  $V_{CC}$ s reach active levels, allowing either  $V_{CC}$  to be powered-up first. Internal power-down control circuits place the device in 3-state if either  $V_{CC}$  is removed.

The Transmit / Receive (T/R) input determines the direction of data flow through the device. The OE input, when HIGH, disables both the A and B ports by placing them in a 3-state condition. The FXL2T245 is designed so control pins T/R and OE are supplied by  $V_{CCA}$ .

### Ordering Information

| Part Number  | Operating Temperature Range | Package                                       | Packing Method |
|--------------|-----------------------------|-----------------------------------------------|----------------|
| FXL2T245L10X | -40°C to +85°C              | 10-Lead, MicroPak™, JEDEC MO255, 1.6 x 2.1 mm | Tape and Reel  |

## Pin Configuration

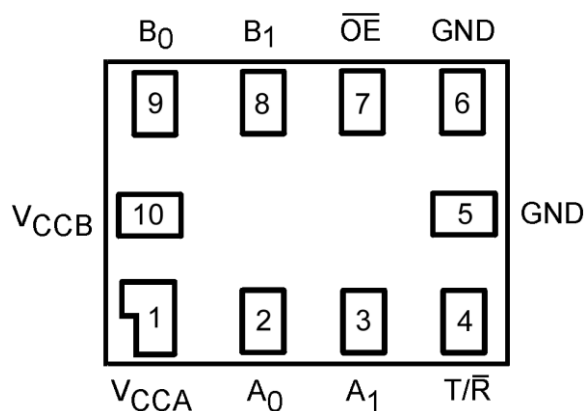


Figure 1. Pin Assignments

## Pin Descriptions

| Pin# | Pin Name          | Description                       |
|------|-------------------|-----------------------------------|
| 1    | V <sub>CCA</sub>  | Side A Power Supply               |
| 2    | A <sub>0</sub>    | Side A Inputs or 3-State Outputs  |
| 3    | A <sub>1</sub>    | Side A Inputs or 3-State Outputs  |
| 4    | T/ $\overline{R}$ | Transmit/Receive Input            |
| 5, 6 | GND               | Ground                            |
| 7    | $\overline{OE}$   | Output Enable Input               |
| 8    | B <sub>1</sub>    | Side B Inputs or 3- State Outputs |
| 9    | B <sub>0</sub>    | Side B Inputs or 3-State Outputs  |
| 10   | V <sub>CCB</sub>  | Side B Power Supply               |

## Truth Table

| Inputs          |                   | Outputs             |
|-----------------|-------------------|---------------------|
| $\overline{OE}$ | T/ $\overline{R}$ |                     |
| LOW             | LOW               | Bus B Data to Bus A |
| LOW             | HIGH              | Bus A Data to Bus B |

### Notes:

1. LOW = low voltage level.
2. HIGH = high voltage level.

## Functional Description

### Power-Up / Power-Down Sequencing

Due to the chip design, the FXL2T245 translator offers the advantage of either  $V_{CC}$  being powered up first. When either  $V_{CC}$  is at 0 V, outputs are in a high-impedance state. The control inputs ( $\overline{T/R}$  and  $\overline{OE}$ ) are designed to track the  $V_{CCA}$  supply. A pull-up resistor tying  $\overline{OE}$  to  $V_{CCA}$  should be used to ensure that bus contention, excessive currents, or oscillations do not occur during power-up/power-down. The size of the pull-up resistor is based upon the current-sinking capability of the  $\overline{OE}$  driver.

The recommended power-up sequence is:

1. Apply power to either  $V_{CC}$ .
2. Apply power to the  $\overline{T/R}$  input (logic HIGH for A-to-B operation; logic LOW for B-to-A operation) and to the respective data inputs (A port or B port). This may occur at the same time as step 1.
3. Apply power to the other  $V_{CC}$ .
4. Drive the  $\overline{OE}$  input LOW to enable the device.

The recommended power-down sequence is:

1. Drive  $\overline{OE}$  input HIGH to disable the device.
2. Remove power from either  $V_{CC}$ .
3. Remove power from the other  $V_{CC}$ .

## Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol          | Parameter                                    | Conditions                                            | Min.              | Max. | Unit |
|-----------------|----------------------------------------------|-------------------------------------------------------|-------------------|------|------|
| $V_{CCA}$       | Supply Voltage                               |                                                       | -0.5              | 4.6  | V    |
| $V_{CCB}$       |                                              |                                                       | -0.5              | 4.6  |      |
| $V_I$           | DC Input Voltage                             | I/O Port A                                            | -0.5              | 4.6  | V    |
|                 |                                              | I/O Port B                                            | -0.5              | 4.6  |      |
|                 |                                              | Control Inputs ( $\overline{T/R}$ , $\overline{OE}$ ) | -0.5              | 4.6  |      |
| $V_O$           | Output Voltage <sup>(3)</sup>                | Output 3-State                                        | -0.5              | 4.6  | V    |
|                 |                                              | Output Active ( $A_n$ )                               | -0.5 to $V_{CCA}$ | 0.5  |      |
|                 |                                              | Output Active ( $B_n$ )                               | -0.5 to $V_{CCB}$ | 0.5  |      |
| $I_{IK}$        | DC Input Diode Current                       | $V_I < 0$ V                                           |                   | -50  | mA   |
| $I_{OK}$        | DC Output Diode Current                      | $V_O < 0$ V                                           |                   | -50  | mA   |
|                 |                                              | $V_O > V_{CC}$                                        |                   | +50  |      |
| $I_{OH}/I_{OL}$ | DC Output Source/Sink Current                |                                                       |                   | ±50  | mA   |
| $I_{CC}$        | DC $V_{CC}$ or Ground Current per Supply Pin |                                                       |                   | ±100 | mA   |
| $T_{STG}$       | Storage Temperature Range                    |                                                       | -65               | +150 | °C   |
| ESD             | Electrostatic Discharge Capability           | Human Body Model, JESD22-A114, Mil Std 883e 3015.7    | All Pins          | 4    | kV   |
|                 |                                              |                                                       | I/O to GND        | 8    |      |
|                 |                                              | Charged Device Model, JESD22-C101, STM 5.3            |                   | 1    | V    |
|                 |                                              | Machine Model, JESD22-A115, STM 5.2                   |                   | 200  |      |

**Note:**

3. I/O absolute maximum ratings must be observed.

## Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

| Symbol                           | Parameter                       | Conditions                                     |                  | Min. | Max.             | Unit |
|----------------------------------|---------------------------------|------------------------------------------------|------------------|------|------------------|------|
| V <sub>CC</sub>                  | Power Supply                    | Operating V <sub>CCA</sub> or V <sub>CCB</sub> |                  | 1.1  | 3.6              | V    |
| V <sub>I</sub>                   | Input Voltage                   | Port A                                         |                  | 0    | 3.6              | V    |
|                                  |                                 | Port B                                         |                  | 0    | 3.6              |      |
|                                  |                                 | Control Inputs (T/R, OE)                       |                  | 0    | V <sub>CCA</sub> |      |
| I <sub>OH</sub> /I <sub>OL</sub> | Output Current                  | V <sub>CC</sub>                                | 3.0 V to 3.6 V   |      | ±24              | mA   |
|                                  |                                 |                                                | 2.3 V to 2.7 V   |      | ±18              |      |
|                                  |                                 |                                                | 1.65 V to 1.95 V |      | ±6               |      |
|                                  |                                 |                                                | 1.40 V to 1.65 V |      | ±2               |      |
|                                  |                                 |                                                | 1.1 V to 1.4 V   |      | ±0.5             |      |
| T <sub>A</sub>                   | Operating Temperature, Free Air |                                                |                  | -40  | +85              | °C   |
| ΔV/Δt                            | Minimum Input Edge Rate         | V <sub>CCA/B</sub> =1.1 V to 3.6 V             |                  |      | 10               | ns/V |

**Note:**

4. All unused inputs must be held at  $V_{CCI}$  or GND.

## Electrical Characteristics

| Symbol          | Parameter                        | Conditions                                                                                      | V <sub>CC0</sub> (V) | V <sub>CCI</sub> (V) | Min.                    | Max.                    | Unit |
|-----------------|----------------------------------|-------------------------------------------------------------------------------------------------|----------------------|----------------------|-------------------------|-------------------------|------|
| V <sub>IH</sub> | HIGH Level Input <sup>(5)</sup>  | Data Inputs A <sub>n</sub> , B <sub>n</sub>                                                     | 1.10 to 3.60         | 2.70 to 3.60         | 2.00                    |                         | V    |
|                 |                                  |                                                                                                 |                      | 2.30 to 2.70         | 1.60                    |                         |      |
|                 |                                  |                                                                                                 |                      | 1.65 to 2.30         | 0.65 x V <sub>CCI</sub> |                         |      |
|                 |                                  |                                                                                                 |                      | 1.40 to 1.65         | 0.65 x V <sub>CCI</sub> |                         |      |
|                 |                                  |                                                                                                 |                      | 1.10 to 1.40         | 0.90 x V <sub>CCI</sub> |                         |      |
|                 |                                  | Control Pins $\overline{\text{OE}}$ , $\overline{\text{T/R}}$ (Referenced to V <sub>CCA</sub> ) |                      | 2.70 to 3.60         | 2.00                    |                         |      |
|                 |                                  |                                                                                                 |                      | 2.30 to 2.70         | 1.60                    |                         |      |
|                 |                                  |                                                                                                 |                      | 1.65 to 2.30         | 0.65 x V <sub>CCA</sub> |                         |      |
|                 |                                  |                                                                                                 |                      | 1.40 to 1.65         | 0.65 x V <sub>CCA</sub> |                         |      |
|                 |                                  |                                                                                                 |                      | 1.10 to 1.40         | 0.90 x V <sub>CCA</sub> |                         |      |
| V <sub>IL</sub> | LOW Level Input <sup>(5)</sup>   | Data Inputs A <sub>n</sub> , B <sub>n</sub>                                                     | 1.10 to 3.60         | 2.70 to 3.60         |                         | 0.80                    | V    |
|                 |                                  |                                                                                                 |                      | 2.30 to 2.70         |                         | 0.70                    |      |
|                 |                                  |                                                                                                 |                      | 1.65 to 2.30         |                         | 0.35 x V <sub>CCI</sub> |      |
|                 |                                  |                                                                                                 |                      | 1.40 to 1.65         |                         | 0.35 x V <sub>CCI</sub> |      |
|                 |                                  |                                                                                                 |                      | 1.10 to 1.40         |                         | 0.10 x V <sub>CCI</sub> |      |
|                 |                                  | Control Pins $\overline{\text{OE}}$ , $\overline{\text{T/R}}$ (Referenced to V <sub>CCA</sub> ) |                      | 2.70 to 3.60         |                         | 0.80                    |      |
|                 |                                  |                                                                                                 |                      | 2.30 to 2.70         |                         | 0.70                    |      |
|                 |                                  |                                                                                                 |                      | 1.65 to 2.30         |                         | 0.35 x V <sub>CCI</sub> |      |
|                 |                                  |                                                                                                 |                      | 1.40 to 1.65         |                         | 0.35 x V <sub>CCI</sub> |      |
|                 |                                  |                                                                                                 |                      | 1.10 to 1.40         |                         | 0.10 x V <sub>CCI</sub> |      |
| V <sub>OH</sub> | HIGH Level Output <sup>(6)</sup> | I <sub>OH</sub> = -100 μA                                                                       | 1.10 to 3.60         | 1.10 to 3.60         | V <sub>CC0</sub> - 0.20 |                         | V    |
|                 |                                  | I <sub>OH</sub> = -12 mA                                                                        | 2.70                 | 2.70                 | 2.20                    |                         |      |
|                 |                                  | I <sub>OH</sub> = -18 mA                                                                        | 3.00                 | 3.00                 | 2.40                    |                         |      |
|                 |                                  | I <sub>OH</sub> = -24 mA                                                                        | 3.00                 | 3.00                 | 2.20                    |                         |      |
|                 |                                  | I <sub>OH</sub> = -6 mA                                                                         | 2.30                 | 2.30                 | 2.00                    |                         |      |
|                 |                                  | I <sub>OH</sub> = -12 mA                                                                        | 2.30                 | 2.30                 | 1.80                    |                         |      |
|                 |                                  | I <sub>OH</sub> = -18 mA                                                                        | 2.30                 | 2.30                 | 1.70                    |                         |      |
|                 |                                  | I <sub>OH</sub> = -6 mA                                                                         | 1.65                 | 1.65                 | 1.25                    |                         |      |
|                 |                                  | I <sub>OH</sub> = -2 mA                                                                         | 1.40                 | 1.40                 | 1.05                    |                         |      |
|                 |                                  | I <sub>OH</sub> = -0.5 mA                                                                       | 1.10                 | 1.10                 | 0.75 x V <sub>CC0</sub> |                         |      |
| V <sub>OL</sub> | LOW Level Output <sup>(6)</sup>  | I <sub>OL</sub> = 100 μA                                                                        | 1.10 to 3.60         | 1.10 to 3.60         |                         | 0.20                    | V    |
|                 |                                  | I <sub>OL</sub> = 12 mA                                                                         | 2.70                 | 2.70                 |                         | 0.40                    |      |
|                 |                                  | I <sub>OL</sub> = 18 mA                                                                         | 3.00                 | 3.00                 |                         | 0.40                    |      |
|                 |                                  | I <sub>OL</sub> = 24 mA                                                                         | 3.00                 | 3.00                 |                         | 0.55                    |      |
|                 |                                  | I <sub>OL</sub> = 12 mA                                                                         | 2.30                 | 2.30                 |                         | 0.40                    |      |
|                 |                                  | I <sub>OL</sub> = 18 mA                                                                         | 2.30                 | 2.30                 |                         | 0.60                    |      |
|                 |                                  | I <sub>OL</sub> = 6 mA                                                                          | 1.65                 | 1.65                 |                         | 0.30                    |      |
|                 |                                  | I <sub>OL</sub> = 2 mA                                                                          | 1.40                 | 1.40                 |                         | 0.35                    |      |
|                 |                                  | I <sub>OL</sub> = 0.5 mA                                                                        | 1.10                 | 1.10                 |                         | 0.30 x V <sub>CC0</sub> |      |

Continued on the following page...

## Electrical Characteristics

| Symbol              | Parameter                                                                                                | Conditions                                                      | V <sub>CCO</sub> (V) | V <sub>CCI</sub> (V) | Min. | Max. | Unit |
|---------------------|----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|----------------------|----------------------|------|------|------|
| I <sub>L</sub>      | Input Leakage Current, Control Pins                                                                      | V <sub>I</sub> =V <sub>CCA</sub> or GND                         | 3.60                 | 1.10 to 3.60         |      | ±1.0 | μA   |
| I <sub>OFF</sub>    | Power Off Leakage Current                                                                                | A <sub>n</sub> , V <sub>I</sub> or V <sub>O</sub> =0 V to 3.6 V | 3.60                 | 0                    |      | ±10  | μA   |
|                     |                                                                                                          | B <sub>n</sub> , V <sub>I</sub> or V <sub>O</sub> =0 V to 3.6 V | 0                    | 3.60                 |      | ±10  |      |
| I <sub>OZ</sub>     | 3-State Output Leakage (0 ≤ V <sub>O</sub> ≤ 3.6 V, V <sub>I</sub> =V <sub>IH</sub> or V <sub>IL</sub> ) | A <sub>n</sub> , B <sub>n</sub> , /OE=V <sub>IH</sub>           | 3.60                 | 3.60                 |      | ±10  | μA   |
|                     |                                                                                                          | B <sub>n</sub> , /OE= Don't Care <sup>(7)</sup>                 | 3.60                 | 0                    |      | ±10  |      |
|                     |                                                                                                          | A <sub>n</sub> , /OE= Don't Care <sup>(7)</sup>                 | 0                    | 3.60                 |      | ±10  |      |
| I <sub>CCA/B</sub>  | Quiescent Supply Current <sup>(8)</sup>                                                                  | V <sub>I</sub> =V <sub>CCI</sub> or GND; I <sub>O</sub> =0      | 1.10 to 3.60         | 1.10 to 3.60         |      | 20   | μA   |
| I <sub>CCZ</sub>    |                                                                                                          |                                                                 | 1.10 to 3.60         | 1.10 to 3.60         |      | 20   |      |
| I <sub>CCA</sub>    |                                                                                                          | V <sub>I</sub> =V <sub>CCA</sub> or GND; I <sub>O</sub> =0      | 1.10 to 3.60         | 0                    |      | -10  |      |
|                     |                                                                                                          |                                                                 | 0                    | 1.10 to 3.60         |      | 10   |      |
| I <sub>CCB</sub>    |                                                                                                          | V <sub>I</sub> =V <sub>CCB</sub> or GND; I <sub>O</sub> =0      | 0                    | 1.10 to 3.60         |      | -10  |      |
|                     |                                                                                                          |                                                                 | 1.10 to 3.60         | 0                    |      | 10   |      |
| ΔI <sub>CCA/B</sub> | Increase in I <sub>CC</sub> per Input; Other Inputs at V <sub>CC</sub> or GND                            | V <sub>IH</sub> =3.0 V                                          | 3.60                 | 3.60                 |      | 500  | μA   |

## Notes:

5. V<sub>CCI</sub> = the V<sub>CC</sub> associated with the data input under test.
6. V<sub>CCO</sub> = the V<sub>CC</sub> associated with the output under test.
7. Don't care = any valid logic level.
8. Reflects current per supply, V<sub>CCA</sub> or V<sub>CCB</sub>.

## AC Electrical Characteristics

| Symbol                              | Parameter                | T <sub>A</sub> = -40 to +85°C    |      |                                  |      |                                    |      |                                  |      |                                 |      | Unit |
|-------------------------------------|--------------------------|----------------------------------|------|----------------------------------|------|------------------------------------|------|----------------------------------|------|---------------------------------|------|------|
|                                     |                          | V <sub>CCB</sub> =3.0 V to 3.6 V |      | V <sub>CCB</sub> =2.3 V to 2.7 V |      | V <sub>CCB</sub> =1.65 V to 1.95 V |      | V <sub>CCB</sub> =1.4 V to 1.6 V |      | V <sub>CCB</sub> =1.1 V to 1.3V |      |      |
|                                     |                          | Min.                             | Max. | Min.                             | Max. | Min.                               | Max. | Min.                             | Max. | Min.                            | Max. |      |
| V <sub>CCA</sub> =3.0 V to 3.6 V    |                          |                                  |      |                                  |      |                                    |      |                                  |      |                                 |      |      |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation Delay A to B | 0.2                              | 3.5  | 0.3                              | 3.9  | 0.5                                | 5.4  | 0.6                              | 6.8  | 1.4                             | 22.0 | ns   |
|                                     | Propagation Delay B to A | 0.2                              | 3.5  | 0.2                              | 3.8  | 0.3                                | 4.0  | 0.5                              | 4.3  | 0.8                             | 13.0 |      |
| t <sub>PZH</sub> , t <sub>PZL</sub> | Output Enable /OE to B   | 0.5                              | 4.0  | 0.7                              | 4.4  | 1.0                                | 5.9  | 1.0                              | 6.4  | 1.5                             | 17.0 | ns   |
|                                     | Output Enable /OE to A   | 0.5                              | 4.0  | 0.5                              | 4.0  | 0.5                                | 4.0  | 0.5                              | 4.0  | 0.5                             | 4.0  |      |
| t <sub>PHZ</sub> , t <sub>PLZ</sub> | Output Disable /OE to B  | 0.2                              | 3.8  | 0.2                              | 4.0  | 0.7                                | 4.8  | 1.5                              | 6.2  | 2.0                             | 17.0 | ns   |
|                                     | Output Disable /OE to A  | 0.2                              | 3.7  | 0.2                              | 3.7  | 0.2                                | 3.7  | 0.2                              | 3.7  | 0.2                             | 3.7  |      |
| V <sub>CCA</sub> =2.3 V to 2.7 V    |                          |                                  |      |                                  |      |                                    |      |                                  |      |                                 |      |      |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation Delay A to B | 0.2                              | 3.8  | 0.4                              | 4.2  | 0.5                                | 5.6  | 0.8                              | 6.9  | 1.4                             | 22.0 | ns   |
|                                     | Propagation Delay B to A | 0.3                              | 3.9  | 0.4                              | 4.2  | 0.5                                | 4.5  | 0.5                              | 4.8  | 1.0                             | 7.0  |      |
| t <sub>PZH</sub> , t <sub>PZL</sub> | Output Enable /OE to B   | 0.6                              | 4.2  | 0.8                              | 4.6  | 1.0                                | 6.0  | 1.0                              | 6.8  | 1.5                             | 17.0 | ns   |
|                                     | Output Enable /OE to A   | 0.6                              | 4.5  | 0.6                              | 4.5  | 0.6                                | 4.5  | 0.6                              | 4.5  | 0.6                             | 4.5  |      |
| t <sub>PHZ</sub> , t <sub>PLZ</sub> | Output Disable /OE to B  | 0.2                              | 4.1  | 0.2                              | 4.3  | 0.7                                | 4.8  | 1.5                              | 6.7  | 2.0                             | 17.0 | ns   |
|                                     | Output Disable /OE to A  | 0.2                              | 4.0  | 0.2                              | 4.0  | 0.2                                | 4.0  | 0.2                              | 4.0  | 0.2                             | 4.0  |      |
| V <sub>CCA</sub> =1.65 V to 1.95 V  |                          |                                  |      |                                  |      |                                    |      |                                  |      |                                 |      |      |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation Delay A to B | 0.3                              | 4.0  | 0.5                              | 4.5  | 0.8                                | 5.7  | 0.9                              | 7.1  | 1.5                             | 22.0 | ns   |
|                                     | Propagation Delay B to A | 0.5                              | 5.4  | 0.5                              | 5.6  | 0.8                                | 5.7  | 1.0                              | 6.0  | 1.2                             | 8.0  |      |
| t <sub>PZH</sub> , t <sub>PZL</sub> | Output Enable /OE to B   | 0.6                              | 5.2  | 0.8                              | 5.4  | 1.2                                | 6.9  | 1.2                              | 7.2  | 1.5                             | 18.0 | ns   |
|                                     | Output Enable /OE to A   | 1.0                              | 6.7  | 1.0                              | 6.7  | 1.0                                | 6.7  | 1.0                              | 6.7  | 1.0                             | 6.7  |      |
| t <sub>PHZ</sub> , t <sub>PLZ</sub> | Output Disable /OE to B  | 0.2                              | 5.1  | 0.2                              | 5.2  | 0.8                                | 5.2  | 1.5                              | 7.0  | 2.0                             | 17.0 | ns   |
|                                     | Output Disable /OE to A  | 0.5                              | 5.0  | 0.5                              | 5.0  | 0.5                                | 5.0  | 0.5                              | 5.0  | 0.5                             | 5.0  |      |

Continued on the following page...

## AC Electrical Characteristics


| Symbol                              | Parameter                | T <sub>A</sub> = -40 to +85°C       |      |                                     |      |                                       |      |                                     |      |                                    |      | Unit |
|-------------------------------------|--------------------------|-------------------------------------|------|-------------------------------------|------|---------------------------------------|------|-------------------------------------|------|------------------------------------|------|------|
|                                     |                          | V <sub>CCB</sub> =3.0 V<br>to 3.6 V |      | V <sub>CCB</sub> =2.3 V<br>to 2.7 V |      | V <sub>CCB</sub> =1.65 V<br>to 1.95 V |      | V <sub>CCB</sub> =1.4 V<br>to 1.6 V |      | V <sub>CCB</sub> =1.1 V<br>to 1.3V |      |      |
|                                     |                          | Min.                                | Max. | Min.                                | Max. | Min.                                  | Max. | Min.                                | Max. | Min.                               | Max. |      |
| V <sub>CCA</sub> =1.4 V to 1.6 V    |                          |                                     |      |                                     |      |                                       |      |                                     |      |                                    |      |      |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation Delay A to B | 0.5                                 | 4.3  | 0.5                                 | 4.8  | 1.0                                   | 6.0  | 1.0                                 | 7.3  | 1.5                                | 22.0 | ns   |
|                                     | Propagation Delay B to A | 0.6                                 | 6.8  | 0.8                                 | 6.9  | 0.9                                   | 7.1  | 1.0                                 | 7.3  | 1.3                                | 9.5  |      |
| t <sub>PZH</sub> , t <sub>PZL</sub> | Output Enable /OE to B   | 1.1                                 | 7.5  | 1.1                                 | 7.6  | 1.3                                   | 7.7  | 1.4                                 | 7.9  | 2.0                                | 20.0 | ns   |
|                                     | Output Enable /OE to A   | 1.0                                 | 7.5  | 1.0                                 | 7.5  | 1.0                                   | 7.5  | 1.0                                 | 7.5  | 1.0                                | 7.5  |      |
| t <sub>PHZ</sub> , t <sub>PLZ</sub> | Output Disable /OE to B  | 0.4                                 | 6.1  | 0.4                                 | 6.2  | 0.9                                   | 6.2  | 1.5                                 | 7.5  | 2.0                                | 18.0 | ns   |
|                                     | Output Disable /OE to A  | 1.0                                 | 6.0  | 1.0                                 | 6.0  | 1.0                                   | 6.0  | 1.0                                 | 6.0  | 1.0                                | 6.0  |      |
| V <sub>CCA</sub> =1.1 V to 1.3 V    |                          |                                     |      |                                     |      |                                       |      |                                     |      |                                    |      |      |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation Delay A to B | 0.8                                 | 13.0 | 1.0                                 | 7.0  | 1.2                                   | 8.0  | 1.3                                 | 9.5  | 2.0                                | 24.0 | ns   |
|                                     | Propagation Delay B to A | 1.4                                 | 22.0 | 1.4                                 | 22.0 | 1.5                                   | 22.0 | 1.5                                 | 22.0 | 2.0                                | 24.0 |      |
| t <sub>PZH</sub> , t <sub>PZL</sub> | Output Enable /OE to B   | 1.0                                 | 12.0 | 1.0                                 | 9.0  | 2.0                                   | 10.0 | 2.0                                 | 11.0 | 2.0                                | 24.0 | ns   |
|                                     | Output Enable /OE to A   | 2.0                                 | 22.0 | 2.0                                 | 22.0 | 2.0                                   | 22.0 | 2.0                                 | 22.0 | 2.0                                | 22.0 |      |
| t <sub>PHZ</sub> , t <sub>PLZ</sub> | Output Disable /OE to B  | 1.0                                 | 15.0 | 0.7                                 | 7.0  | 1.0                                   | 8.0  | 2.0                                 | 10.0 | 2.0                                | 20.0 | ns   |
|                                     | Output Disable /OE to A  | 2.0                                 | 15.0 | 2.0                                 | 12.0 | 2.0                                   | 12.0 | 2.0                                 | 12.0 | 2.0                                | 12.0 |      |

## Capacitance

| Symbol    | Parameter                                      | Conditions                                                                        | $T_A=+25^\circ\text{C}$ | Unit |
|-----------|------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------|------|
|           |                                                |                                                                                   | Typical                 |      |
| $C_{IN}$  | Input Capacitance (Pins O/E, TR)               | $V_{CCA}=V_{CCB}=3.3\text{ V}$ , $V_I=0\text{ V}$ or $V_{CCA/B}$                  | 4                       | pF   |
| $C_{I/O}$ | Input / Output Capacitance $A_n$ , $B_n$ Ports | $V_{CCA}=V_{CCB}=3.3\text{ V}$ , $V_I=0\text{ V}$ or $V_{CCA/B}$                  | 5                       | pF   |
| $C_{PD}$  | Power Dissipation Capacitance                  | $V_{CCA}=V_{CCB}=3.3\text{ V}$ , $V_I=0\text{ V}$ or $V_{CC}$ , $f=10\text{ MHz}$ | 20                      | pF   |



## Physical Dimensions

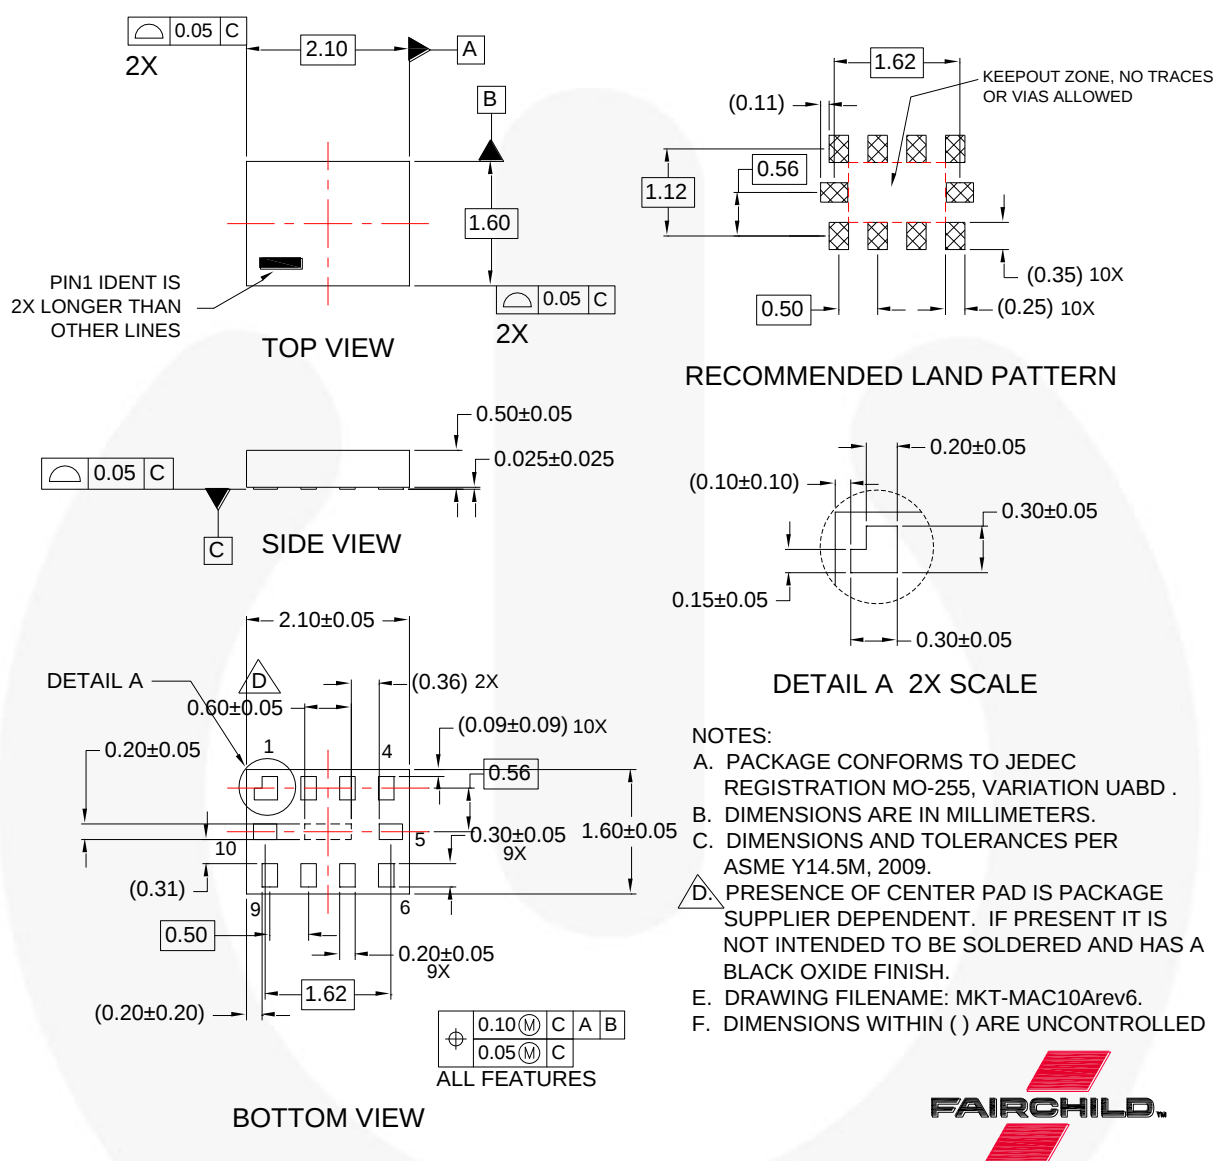

**Figure 6. 10-Lead, MicroPak™, JEDEC MO255, 1.6 x 2.1 mm**

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:  
<http://www.fairchildsemi.com/dwg/MA/MAC10A.pdf>.

For current packing container specifications, visit Fairchild Semiconductor's online packaging area:  
[http://www.fairchildsemi.com/packing\\_dwg/PKG-MAC10A.pdf](http://www.fairchildsemi.com/packing_dwg/PKG-MAC10A.pdf).



## TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™  
AX-CAP®  
BiSiC™  
Build it Now™  
CorePLUS™  
CorePOWER™  
CROSSVOLT™  
CTL™  
Current Transfer Logic™  
DEUXPEED®  
Dual Cool™  
EcoSPARK®  
EfficientMax™  
ESBC™  
F<sup>®</sup>  
Fairchild®  
Fairchild Semiconductor®  
FACT Quiet Series™  
FACT®  
FAST®  
FastvCore™  
FETBench™  
FPS™

F-PFS™  
FRFET®  
Global Power Resource™  
GreenBridge™  
Green FPS™  
Green FPS™ e-Series™  
Gmax™  
GTO™  
IntelliMAX™  
ISOPANAR™  
Making Small Speakers Sound Louder and Better™  
MegaBuck™  
MICROCOUPLER™  
MicroFET™  
MicroPak™  
MicroPak2™  
MillerDrive™  
MotionMax™  
mWSaver®  
OptoHiT™  
OPTOLOGIC®  
OPTOPLANAR®

PowerTrench®  
PowerXS™  
Programmable Active Droop™  
QFET®  
QS™  
Quiet Series™  
RapidConfigure™  
Saving our world, 1mW/W/kW at a time™  
SignalWise™  
SmartMax™  
SMART START™  
Solutions for Your Success™  
SPM®  
STEALTH™  
SuperFET®  
SuperSOT™-3  
SuperSOT™-6  
SuperSOT™-8  
SupreMOS®  
SyncFET™  
Sync-Lock™

SYSTEM GENERAL®  
TinyBoost®  
TinyBuck®  
TinyCalc™  
TinyLogic®  
TINYOPTO™  
TinyPower™  
TinyPWM™  
TinyWire™  
TranSiC™  
TriFault Detect™  
TRUECURRENT®  
µSerDes™  
SerDes™  
UHC®  
Ultra FRFET™  
UniFET™  
VCX™  
VisualMax™  
VoltagePlus™  
XS™  
仙童™

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status        | Definition                                                                                                                                                                                          |
|--------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production      | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production       | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.                                               |
| Obsolete                 | Not In Production     | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.                                                    |

Rev. 168