

---

## Preliminary Product Specification

---

### High Powered 860nm VCSELs

---

#### HVS7000-001

#### PRODUCT FEATURES

- 10's of Watts of Peak Power
- Intended for pulsed applications
- Pulse widths of <10ns
- Duty Cycle <1%
- Gaussian Beam profile
- Narrow Beam Divergence
- Stable wavelength over Temperature
- High Efficiency



#### APPLICATIONS

- Gesture Recognition
- 3D IR Imaging


Finisar has developed a 2D VCSEL array TO based component that is specifically targeted towards use in gesture recognition and 3D camera applications. This specific product is packaged in a TO-46 can with a 2D VCSEL that is capable of delivering more than 500mW of CW power at room temperature. The intended use is with short electrical pulses (<10ns) and low duty cycle (<1%) where peak powers can reach 10W. In pulsed operation, the 2D array emits a Gaussian shaped optical beam and is capable of rise and fall times less than 1ns. Refer to Finisar application note AN-2109 entitled “High Power VCSELs for Gesture Recognition” for more information.

#### PRODUCT SELECTION

| Part Number | Description                         |
|-------------|-------------------------------------|
| HVS7000-001 | High power 860nm VCSEL in TO-46 Can |

## I. Absolute Maximum Ratings

| Parameter                                | Rating         |
|--|----------------|
| Storage Temperature                      | -40 to +85°C   |
| Case Operating Temperature               | -10 to +60°C   |
| Lead Solder Temperature                  | 260°C, 10 sec. |
| Reverse Voltage                          | 5V             |
| Max continuous forward current           | 1.75A          |
| Max peak forward current (<100ns, DC<1%) | 20A            |
| ESD Exposure (Human Body Model)          | 500V           |

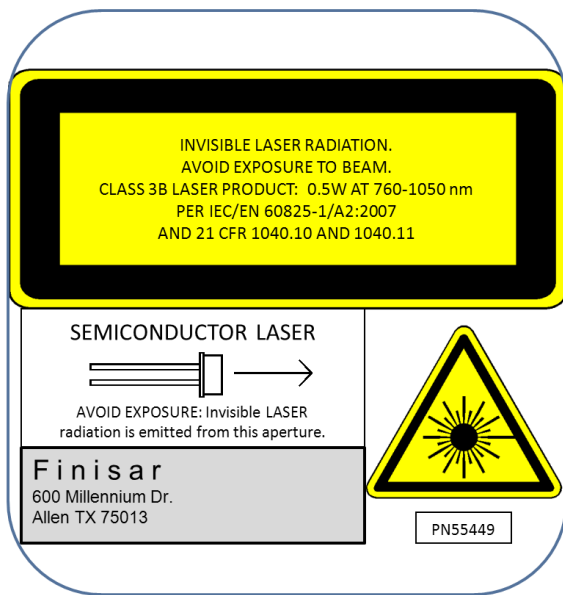

### Notice

The inherent design of this component causes it to be sensitive to electrostatic discharge (ESD). To prevent ESD-induced damage and/or degradation to equipment, take normal ESD precautions when handling this product

### Notice

Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operations section for extended periods of time may affect reliability.

### III. Electro-Optical Characteristics ( $T_{OP} = 25^{\circ}\text{C}$ )


| VCSEL Parameters                       | Test Condition   | Symbol                     | Min. | Typ.  | Max. | Units                   | Notes |
|--|--|----------------------------|------|-------|------|-------------------------|-------|
| CW Optical Power                       | $I_F = 1.5\text{A}$  | $P_{O,CW}$                 | 500  |       |      | mW                      | 1     |
| Peak Optical Power                     | $I_{PULSE} = 10\text{A}$ , $T_{PULSE} = 10\text{ns}$ , DC = 0.1% | $P_{O,PULSED}$             | 7    |       |      | W                       | 2     |
| Threshold Current                      |  | $I_{TH}$                   |      | 500   |      | mA                      |       |
| Slope Efficiency                       | $I_F = 1-1.5\text{A}$ ; $T_A = 25^{\circ}\text{C}$               | $\eta$                     | 0.8  |       |      | mW/mA                   | 3     |
| Slope Efficiency Temperature variation | $T_A = 0^{\circ}\text{C}$ to $70^{\circ}\text{C}$                | $\Delta\eta/\Delta T$      |      | -3000 |      | ppm/ $^{\circ}\text{C}$ | 4     |
| Peak Wavelength                        | $I_F = 1.5\text{A}$ ,  | $\lambda_P$                | 840  | 860   | 870  | nm                      |       |
| $\lambda_P$ Temperature Variation      | $I_F = 1.5\text{A}$ ,  | $\Delta\lambda_P/\Delta T$ |      | 0.06  |      | nm/ $^{\circ}\text{C}$  |       |
| Spectral Bandwidth, RMS                | $I_F = 1.5\text{A}$  | $\Delta\lambda$            |      | 0.25  | 1    | nm                      |       |
| Laser Forward Voltage                  | $I_F = 1.5\text{A}$  |                            |      |       | 3.0  | V                       |       |
| Rise and Fall Times                    | $I_F = 1.5\text{A}$  | $t_r, t_f$                 |      | 1     |      | ns                      | 5     |
| Series Resistance                      | $I_F = 1-1.5\text{A}$ ; $T_A = 25^{\circ}\text{C}$               | $R_S$                      |      |       | 1    | $\Omega$                |       |
| Beam Divergence                        | $I_{PULSE} = 10\text{A}$ , $T_{PULSE} = 10\text{ns}$ , DC = 0.1% | $\theta$                   | 10   | 16    | 25   | Degrees                 | 6     |

#### Notes:

1. For the purpose of these tests,  $I_F$  is DC current. The TO can must be attached to a proper heat sink and held at  $25^{\circ}\text{C}$ .
2.  $I_{PULSE}$  is defined as the peak current with a pulse width of  $T_{PULSE}$  and a duty cycle (DC) defined as the ratio of pulse width to pulse repetition time. For a 10ns pulse, the pulse interval is 10us for a 0.1% DC.
3. Slope efficiency is defined as  $\Delta P_O/\Delta I_F$ .
4. To compute the value of Slope Efficiency at a temperature T, use the following equation:  

$$\eta(T) \approx \eta(25^{\circ}\text{C}) * [1 + (\Delta\eta/\Delta T) * (T - 25)]$$
5. Rise and fall times specifications are the 20% - 80%. Rise and fall times are sensitive to drive electronics and a small prebias current (~10mA) may be needed for optimal performance.
6. Beam divergence is defined as the total included angle between the  $1/e^2$  intensity points

#### IV. Typical Performance Curves

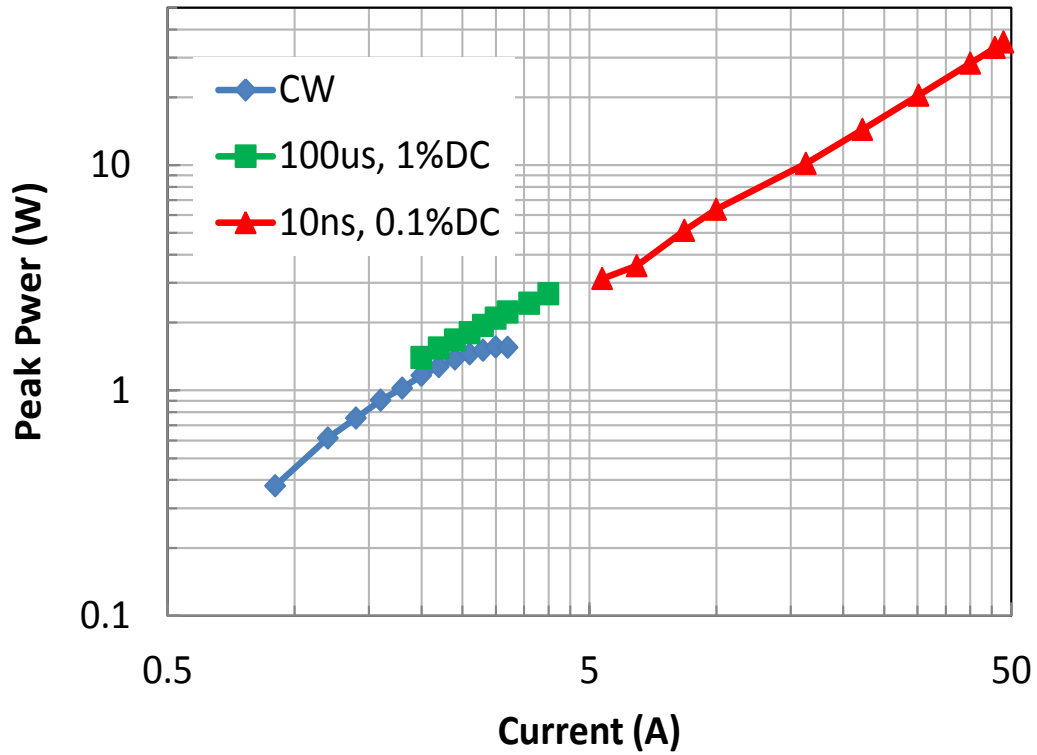

**VI. Environmental Specifications**


| Parameter                  | Symbol           | Min | Typ | Max | Units | Ref. |
|----------------------------|------------------|-----|-----|-----|-------|------|
| Case Operating Temperature | T <sub>op</sub>  | -10 |     | 60  | °C    |      |
| Storage Temperature        | T <sub>sto</sub> | -40 |     | 85  | °C    |      |

**VII. Regulatory Compliance**

| Feature          | Agency   | Standard                             | Certificate Number |
|------------------|----------|--------------------------------------|--------------------|
| Laser Eye Safety | FDA/CDRH | CDRH 21 CFR 1040 and Laser Notice 50 | 9521487            |

Copies of the referenced certificates are available at Finisar Corporation upon request.

**IX. Mechanical Specifications**

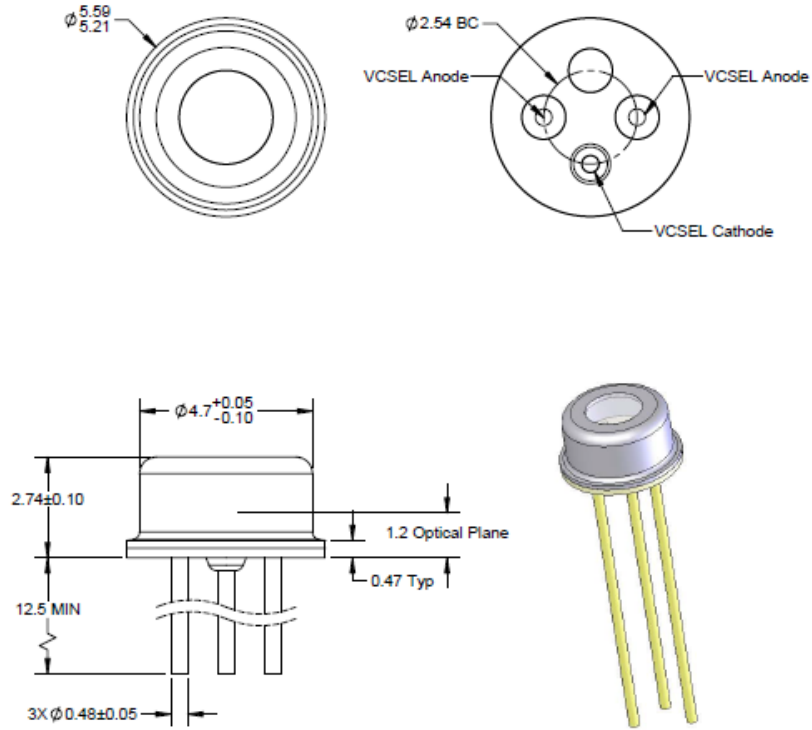

**XII. Revision History**

| Revision | Date       | Description                                   |
|----------|------------|---|
| A1       | 12/10/2012 | • Preliminary Document created.               |
| B00      | 10/30/2014 | • Modified performance specs with recent data |
| B01      | 1/14/2016  | • Removed spacer under the VCSEL              |

**XII. For More Information**

Finisar Corporation  
1389 Moffett Park Drive  
Sunnyvale, CA 94089-1133  
Tel. 1-408-548-1000  
Fax 1-408-541-6138  
[sales@finisar.com](mailto:sales@finisar.com)  
[www.finisar.com](http://www.finisar.com)