

**PUB-2B series DC/DC Converters**  
Isolated 2W Unregulated Single/Dual Output


28701-BMR805 Rev. B

March 2021

© Flex

### Key Features

- Industry standard SIP-7 package  
19.65 x 7.05 x 10.2 mm (0.774 x 0.278 x 0.402 in)
- High efficiency, typ. 86% at 12Vout full load
- 4000 Vdc input to output isolation
- Wide operating temperature from -40°C to 95°C
- No minimum load required
- Output short-circuit protection
- 3.3 V, 5 V, 12 V & 24 V input
- 3.3 V, 5 V, 9 V, 12 V & 15 V output
- MTBF 18.3 Mh

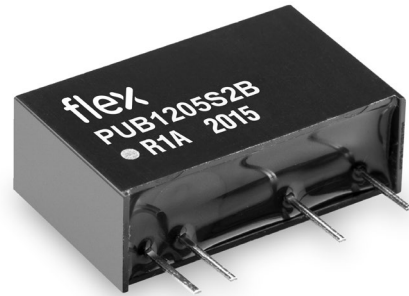

### General Characteristics

- 2W output power
- Safety Compliance to EN/UL 62368-1
- ISO 9001/14001 certified supplier

#### Safety Approvals



#### Design for Environment



Meets requirements in high-temperature lead-free soldering processes.

### Contents

Ordering Information	2
General Information	2
Safety Specification	3
Absolute Maximum Ratings	4
Electrical Specification	
3.3-24 V <sub>I</sub> / 3.3-15 V <sub>O</sub> , 0.067-0.6 A / 2 W	PUB-2B Series ..... 5
EMC Specification	11
Operating Information	12
Thermal Consideration	13
Connections	13
Mechanical Information	14
Soldering Information	15
Delivery Information	15
Product Qualification Specification	16

## Technical Specification

**PUB-2B series DC/DC Converters**  
Isolated 2W Unregulated Single/Dual Output

28701-BMR805 Rev. B

March 2021

© Flex

### Ordering Information

Product	Nominal Input	Output
PUB0303S2B	3.3V	3.3 V, 0.606 A / 2 W
PUB0305S2B	3.3V	5 V, 0.4 A / 2 W
PUB0312S2B	3.3V	12 V, 0.167 A / 2 W
PUB0312D2B	3.3V	±12 V, 0.084 A / 2 W
PUB0505S2B	5V	5 V, 0.4 A / 2 W
PUB0512S2B	5V	12 V, 0.167 A / 2 W
PUB0512D2B	5V	±12 V, 0.084 A / 2 W
PUB051509D2B	5V	+15 / -9, 0.067 A / 0.112 A / 2W
PUB1203S2B	12V	3.3 V, 0.606 A / 2 W
PUB1205S2B	12V	5 V, 0.4 A / 2 W
PUB1212S2B	12V	12 V, 0.167 A / 2 W
PUB1212D2B	12V	±12 V, 0.084 A / 2 W
PUB121509D2B	12V	+15 / -9, 0.067 A / 0.112 A / 2W
PUB2403S2B	24V	3.3 V, 0.606 A / 2 W
PUB2405S2B	24V	5 V, 0.4 A / 2 W
PUB2412S2B	24V	12 V, 0.167 A / 2 W
PUB2412D2B	24V	±12 V, 0.084 A / 2 W
PUB2415D2B	24V	±15 V, 0.067 A / 2 W
PUB241509D2B	24V	+15 / -9, 0.067 A / 0.112 A / 2W

In MIL-HDBK-217F, all part reliability models include the effects of environmental stresses through the environmental factor,  $\pi E$ . It encompasses the major areas of equipment use, here we use ground benign, GB.

Mean steady-state failure rate, $\lambda$	MTBF
54.6 nFailures/h	18.3 Mh

### Compatibility with RoHS requirements

The products are compatible with the relevant clauses and requirements of the RoHS directive 2011/65/EU and have a maximum concentration value of 0.1% by weight in homogeneous materials for lead, mercury, hexavalent chromium, PBB and PBDE and of 0.01% by weight in homogeneous materials for cadmium.

Exemptions in the RoHS directive utilized in Flex products are found in the Statement of Compliance document.

Flex fulfills and will continuously fulfill all its obligations under regulation (EC) No 1907/2006 concerning the registration, evaluation, authorization and restriction of chemicals (REACH) as they enter into force and is through product materials declarations preparing for the obligations to communicate information on substances in the products.

### Product number and Packaging

PUBX <sub>1</sub> X <sub>2</sub> X <sub>3</sub> X <sub>4</sub> X <sub>5</sub> X <sub>6</sub> n <sub>1</sub> n <sub>2</sub> n <sub>3</sub> *			
Options	n <sub>1</sub>	n <sub>2</sub>	n <sub>3</sub>
Single/Dual output	o		
Output Power		o	
Form factor			o

Options	Description
n <sub>1</sub>	S Single Output D Dual Output
n <sub>2</sub>	2 2W
n <sub>3</sub>	B SIP7

Example a 24Vdc nominal input, single 5Vdc output, 2W SIP7 product would be PUB2405S2B.

The products are delivered in tubes. See details in Delivery Package Information.

\* X<sub>1</sub>X<sub>2</sub> = Nominal input voltage

X<sub>3</sub>X<sub>4</sub> = Output voltage (single/symmetric dual or asymmetric dual positive output)

X<sub>5</sub>X<sub>6</sub> = Negative output voltage (only for asymmetric dual)

### General Information

#### Reliability

The failure rate ( $\lambda$ ) and mean time between failures (MTBF=  $1/\lambda$ ) is calculated at max output power and an operating ambient temperature ( $T_A$ ) of +25°C. Flex uses MIL-HDBK-217F, Notice 2 to calculate the mean steady-state failure rate

### Quality Statement

The products are designed and manufactured in an industrial environment where quality systems and methods like ISO 9000, Six Sigma, and SPC are intensively in use to boost the continuous improvements strategy. Infant mortality or early failures in the products are screened out and they are subjected to an ATE-based final test. Conservative design rules, design reviews and product qualifications, plus the high competence of an engaged work force, contribute to the high quality of the products.

### Warranty

Warranty period and conditions are defined in Flex General Terms and Conditions of Sale.

### Limitation of Liability

Flex does not make any other warranties, expressed or implied including any warranty of merchantability or fitness for a particular purpose (including, but not limited to, use in life support applications, where malfunctions of product can cause injury to a person's health or life).

### © Flex 2021

The information and specifications in this technical specification is believed to be correct at the time of publication. However, no liability is accepted for inaccuracies, printing errors or for any consequences thereof. Flex reserves the right to change the contents of this technical specification at any time without prior notice.

## Technical Specification

<b>PUB-2B series DC/DC Converters</b> Isolated 2W Unregulated Single/Dual Output	28701-BMR805 Rev. B	March 2021
	© Flex	

**Safety Specification****General information**

Flex Power DC/DC converters and DC/DC regulators are designed in accordance with the safety standards IEC 62368-1, EN 62368-1 and UL 62368-1 *Audio/video, information and communication technology equipment - Part 1: Safety requirements*

IEC/EN/UL 62368-1 contains requirements to prevent injury or damage due to the following hazards:

- Electrical shock
- Electrically-caused fire
- Injury caused by hazardous substances
- Mechanically-caused injury
- Skin burn
- Radiation-caused injury

On-board DC/DC converters, Power interface modules and DC/DC regulators are defined as component power supplies. As components they cannot fully comply with the provisions of any safety requirements without “conditions of acceptability”. Clearance between conductors and between conductive parts of the component power supply and conductors on the board in the final product must meet the applicable safety requirements. Certain conditions of acceptability apply for component power supplies with limited stand-off (see Mechanical Information for further information). It is the responsibility of the installer to ensure that the final product housing these components complies with the requirements of all applicable safety standards and regulations for the final product.

Component power supplies for general use shall comply with the requirements in IEC/EN/UL 62368-1. Product related standards, e.g. IEEE 802.3af *Power over Ethernet*, and ETS-300132-2 *Power interface at the input to telecom equipment, operated by direct current (dc)* are based on IEC/EN/UL 60950-1 with regards to safety.

Flex Power DC/DC converters, Power interface modules and DC/DC regulators are UL 62368-1 recognized and certified in accordance with EN 62368-1. The flammability rating for all construction parts of the products meet requirements for V-0 class material according to IEC 60695-11-10, *Fire hazard testing, test flames – 50 W horizontal and vertical flame test methods*.

**Isolated DC/DC converters & Power interface modules**

The product may provide basic or functional insulation between input and output according to IEC/EN/UL 62368-1 (see Safety Certificate), different conditions shall be met if the output of a basic or a functional insulated product shall be considered as ES1 energy source.

For basic insulated products (see Safety Certificate) the output is considered as ES1 energy source if one of the

following conditions is met:

- The input source provides supplementary or double or reinforced insulation from the AC mains according to IEC/EN/UL 62368-1.
- The input source provides functional or basic insulation from the AC mains and the product’s output is reliably connected to protective earth according to IEC/EN/UL 62368-1.

For functional insulated products (see Safety Certificate) the output is considered as ES1 energy source if one of the following conditions is met:

- The input source provides double or reinforced insulation from the AC mains according to IEC/EN/UL 62368-1.
- The input source provides basic or supplementary insulation from the AC mains and the product’s output is reliably connected to protective earth according to IEC/EN/UL 62368-1.
- The input source is reliably connected to protective earth and provides basic or supplementary insulation according to IEC/EN/UL 62368-1 and the maximum input source voltage is 60 Vdc.

Galvanic isolation between input and output is verified in an electric strength test and the isolation voltage ( $V_{iso}$ ) meets the voltage strength requirement for basic insulation according to IEC/EN/UL 62368-1.

It is recommended to use a slow blow fuse at the input of each DC/DC converter. If an input filter is used in the circuit the fuse should be placed in front of the input filter. In the rare event of a component problem that imposes a short circuit on the input source, this fuse will provide the following functions:

- Isolate the fault from the input power source so as not to affect the operation of other parts of the system
- Protect the distribution wiring from excessive current and power loss thus preventing hazardous overheating

**Non - isolated DC/DC regulators**

The DC/DC regulator output is ES1 energy source if the input source meets the requirements for ES1 according to IEC/EN/UL 62368-1.

Technical Specification

**PUB-2B series DC/DC Converters**  
Isolated 2W Unregulated Single/Dual Output

28701-BMR805 Rev. B

March 2021


© Flex

**Absolute Maximum Ratings**

Characteristics		min	typ	max	Unit
$T_{P1}$	Operating Temperature (see Thermal Consideration section)	-40		+95	°C
$T_{CASE}$	Max. case temperature			+105	°C
$T_S$	Storage temperature	-55		+125	°C
$V_I$	Input voltage Range (base on nominal input voltage)	-10		+10	%
$V_{iso}$	Isolation voltage (input to output test voltage in 1minute)			4000	Vdc

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the Electrical Specification section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

**Fundamental Circuit Diagram**

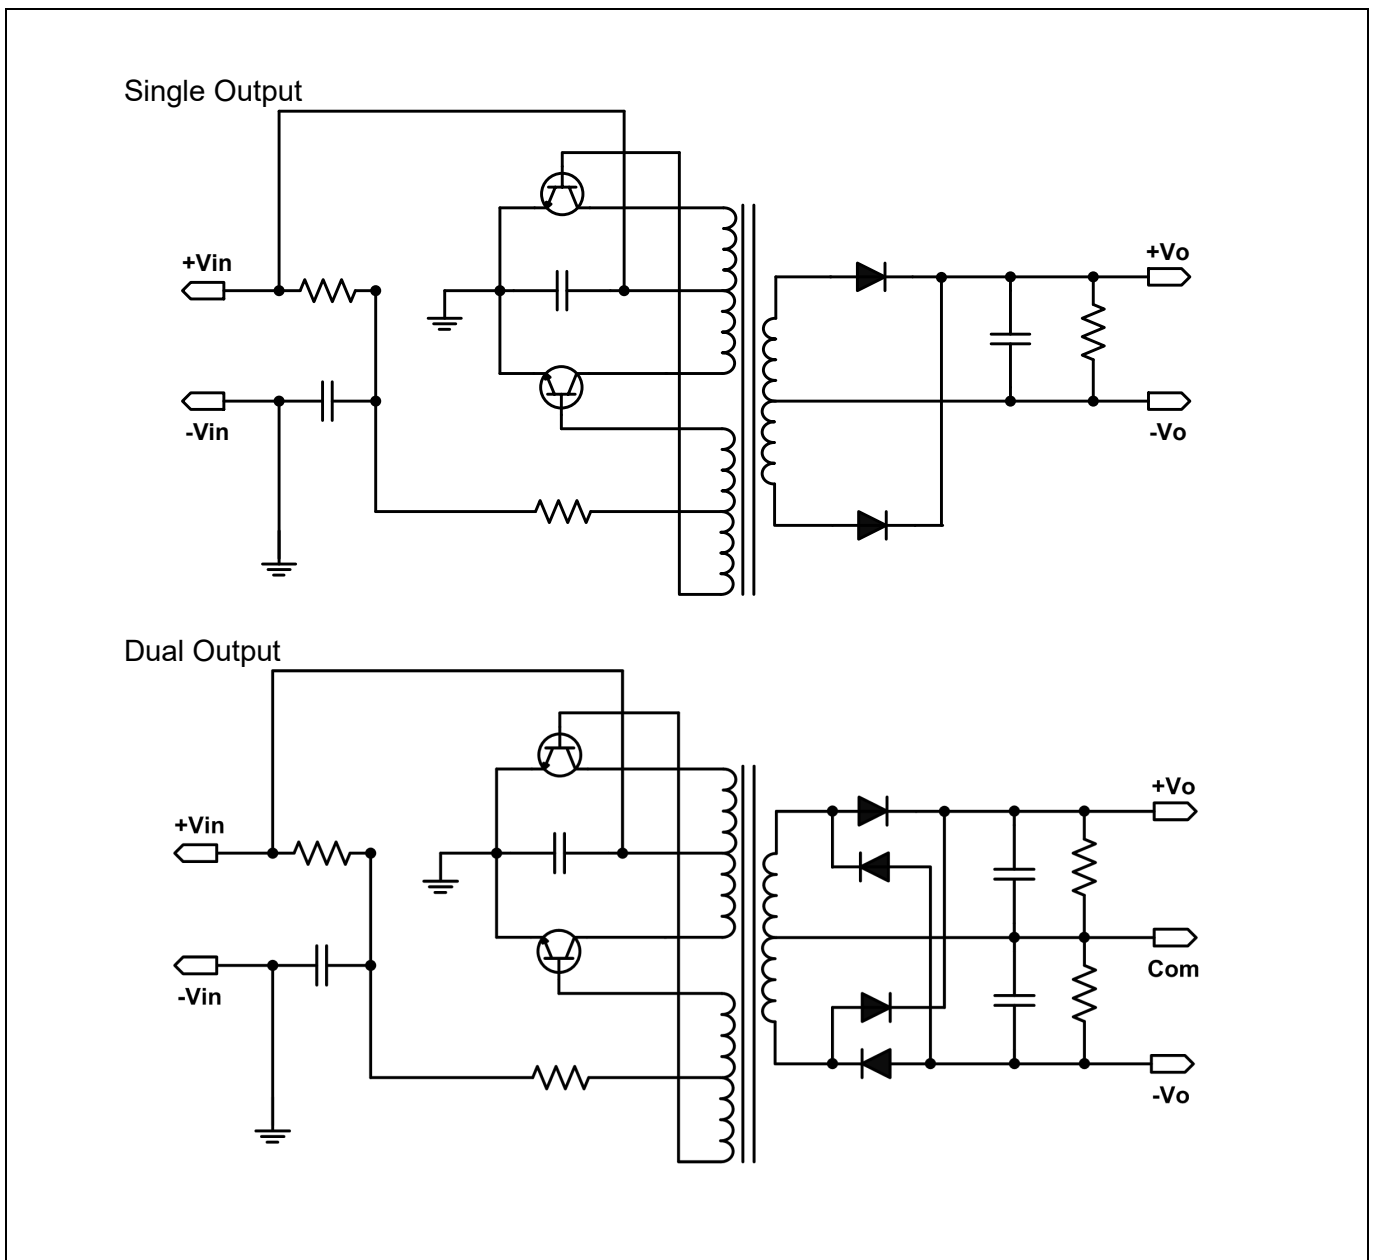

## Technical Specification

**PUB-2B series DC/DC Converters**  
 Isolated 2W Unregulated Single/Dual Output

28701-BMR805 Rev. B

March 2021

© Flex

**Electrical Specification**Typical values given at:  $T_{P1} = +25^{\circ}\text{C}$ , unless otherwise specified under Conditions.

Part Number	Typical Input Voltage	Output Voltage	Output Current	Efficiency (typ.) 50% of max $I_o$	Efficiency (typ.) max $I_o$	Capacitive Load (note 1)
	V	V	A	%	%	$\mu\text{F}$
PUB0303S2B	3.3	3.3	0.606	70	77	1000
PUB0305S2B	3.3	5	0.4	75	78	1500
PUB0312S2B	3.3	12	0.167	77	84	470
PUB0312D2B	3.3	$\pm 12$	0.84	78	84	220
PUB0505S2B	5	5	0.4	75	79	1500
PUB0512S2B	5	12	0.167	74	83	470
PUB0512D2B	5	$\pm 12$	0.084	79	84	220
PUB051509D2B	5	+15 / -9	+0.067 / -0.112	77	82	150 / 150
PUB1203S2B	12	3.3	0.606	72	78	1500
PUB1205S2B	12	5	0.4	71	79	1500
PUB1212S2B	12	12	0.167	76	85	470
PUB1212D2B	12	$\pm 12$	0.084	69	80	20
PUB121509D2B	12	+15 / -9	+0.067 / -0.112	70	78	150 / 150
PUB2403S2B	24	3.3	0.606	74	80	1500
PUB2405S2B	24	5	0.4	77	84	1500
PUB2412S2B	24	12	0.167	76	86	470
PUB2412D2B	24	$\pm 12$	0.084	76	83	220
PUB2415D2B	24	$\pm 15$	0.067	74	84	220
PUB241509D2B	24	+15 / -9	+0.067 / -0.112	74	81	150 / 150

Characteristics		Conditions	min	typ	max	Unit
$C_i$	Internal input capacitance			1		$\mu\text{F}$
$P_o$	Output power				2	W
$C_{ISO}$	Isolation capacitance			25		pF
$R_{ISO}$	Isolation resistance		10			G $\Omega$
$V_{O_i}$	Voltage accuracy	$T_{P1} = +25^{\circ}\text{C}$ , $I_o = \text{max } I_o$	-5		+5	%
	Minimum load	$T_{P1} = +25^{\circ}\text{C}$	0			%
	Line regulation	$V_{LL}$ to $V_{HL}$ , max $I_o$		1.2		%
	Load regulation $I_{LL} - I_{HL}$ , at typ. $V_{in}$	$V_o = 3.3\text{ V}$ $V_o = 5\text{ V}$ $V_o = 12 - 15\text{ V}$			20 15 10	%
$f_s$	Switching frequency	100 % of max $I_o$ (at Nominal $V_{in}$ )	20			kHz
$V_{Oac}$	Output ripple & noise (20 MHz bandwidth limit, see Note 2)	$V_o = 3.3\text{ V}$		130		mVp-p
		others		50	120	mVp-p

Note 1: The maximum capacitive load is test by normal input and constant resistive load.

Note 2: The Output ripple & noise is under nominal  $V_{in}$  and max  $I_o$  with 0.1  $\mu\text{F}/50\text{V}$  MLCC

Technical Specification

**PUB-2B series DC/DC Converters**  
Isolated 2W Unregulated Single/Dual Output


28701-BMR805 Rev. B

March 2021

© Flex

**Typical Characteristics**


**Efficiency**

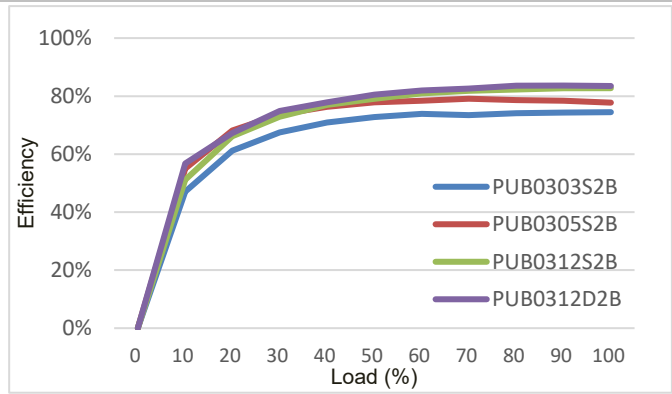

**PUB03-2B**  
Efficiency vs. load current at  $T_{P1} = +25^{\circ}\text{C}$ .


**PUB-2B series**

**Efficiency**

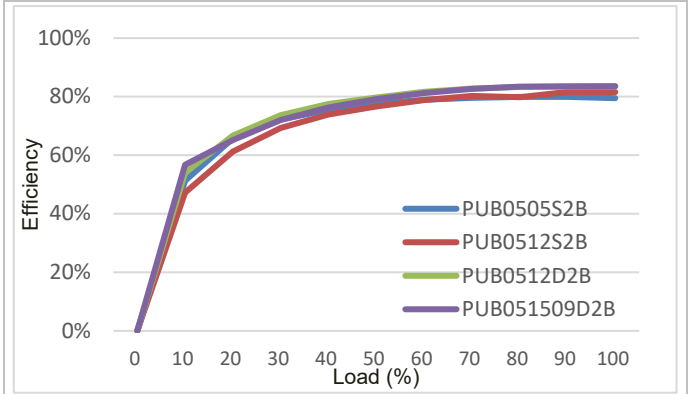


**PUB05-2B**  
Efficiency vs. load current at  $T_{P1} = +25^{\circ}\text{C}$ .

**Efficiency**

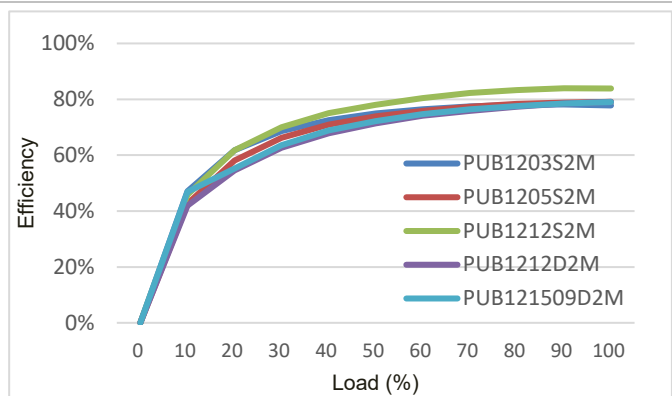


**PUB12-2B**  
Efficiency vs. load current at  $T_{P1} = +25^{\circ}\text{C}$ .

**Efficiency**

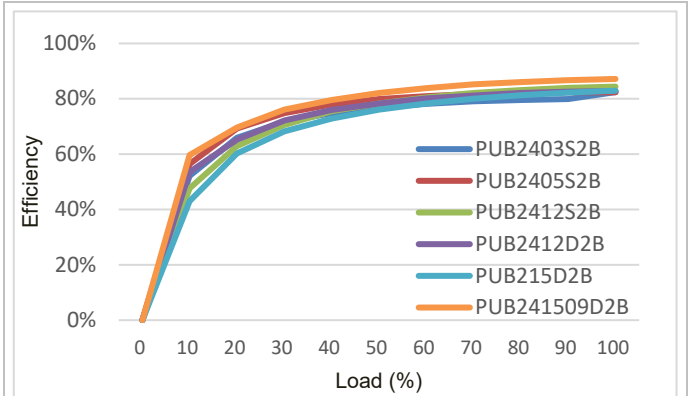

**PUB24-2B**  
Efficiency vs. load current at  $T_{P1} = +25^{\circ}\text{C}$ .

**Operating Ambient Temperature Curve**

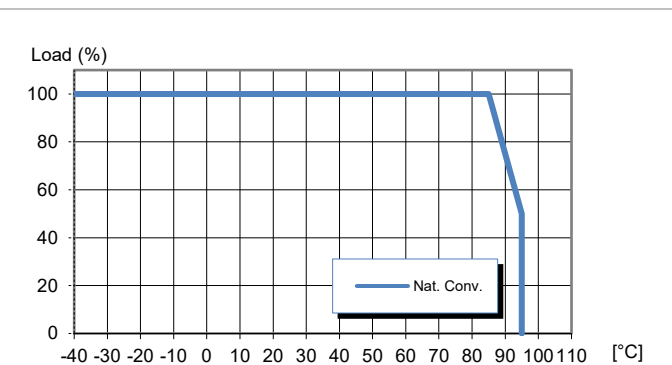

Available load vs. ambient air temperature.  
See Thermal Consideration section.

Technical Specification


**PUB-2B series DC/DC Converters**  
Isolated 2W Unregulated Single/Dual Output

28701-BMR805 Rev. B

March 2021


© Flex

**Typical Characteristics**  
**Output Voltage Accuracy**

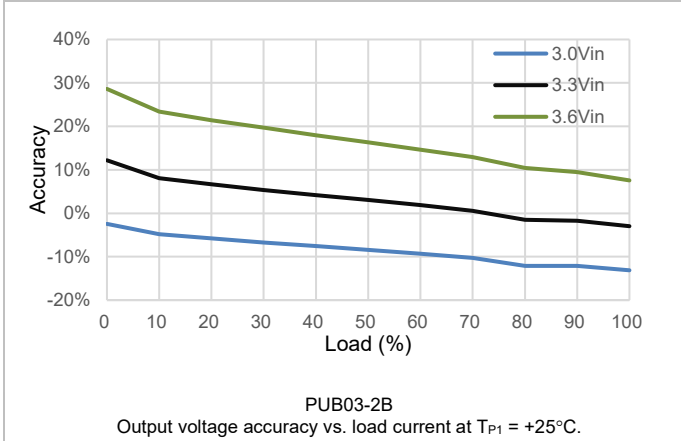


**PUB-2B series**


**Output Voltage Accuracy**

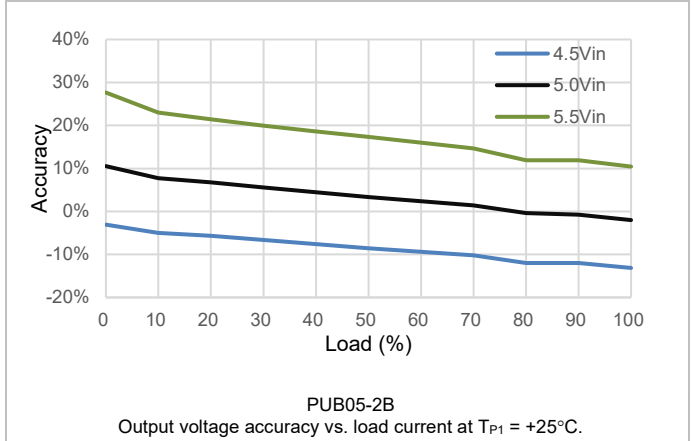


**Output Voltage Accuracy**

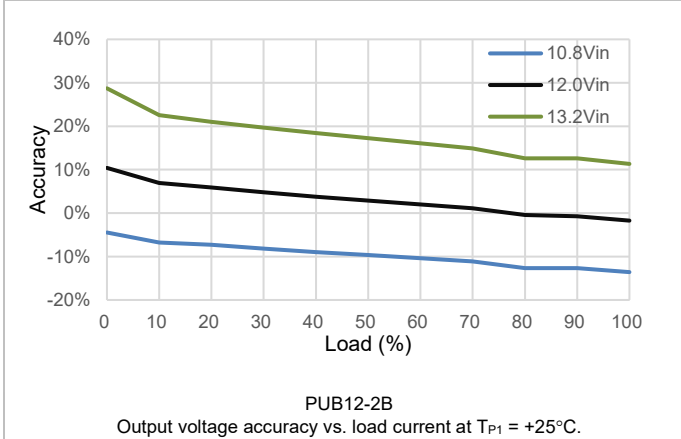


**Output Voltage Accuracy**

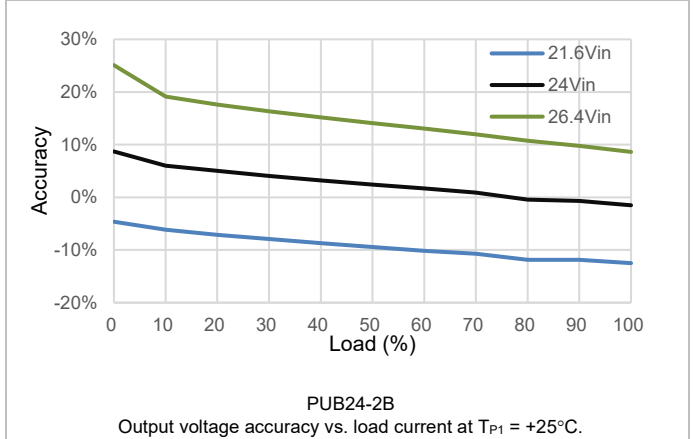

**Load Regulation**

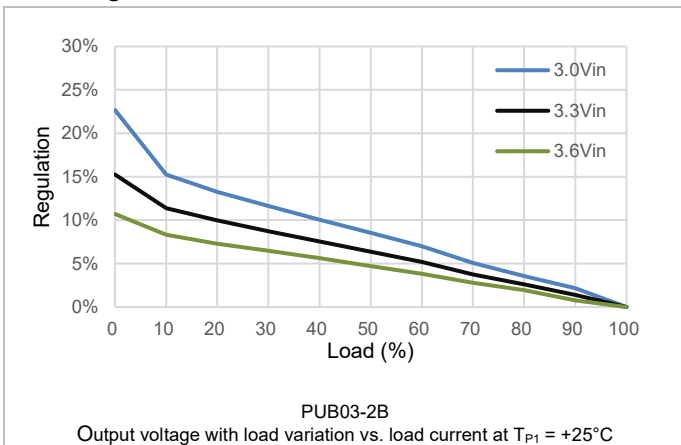

**Load Regulation**

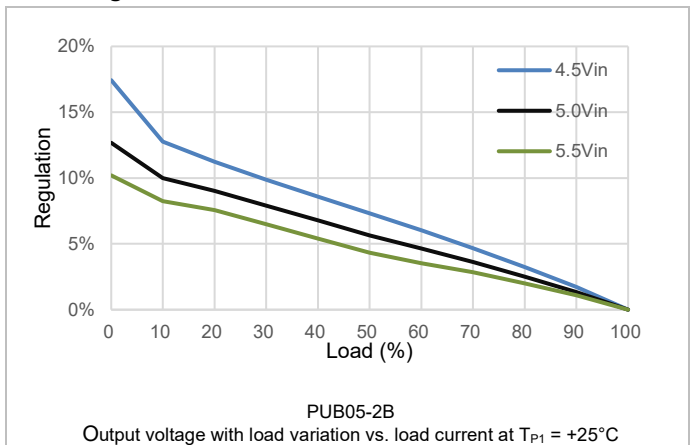

**PUB-2B series DC/DC Converters**  
Isolated 2W Unregulated Single/Dual Output


28701-BMR805 Rev. B

March 2021

© Flex


### Typical Characteristics

#### Load Regulation

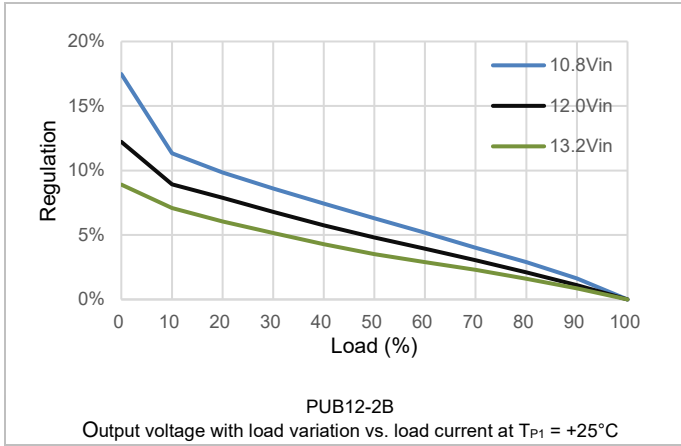


### PUB-2B series


#### Load Regulation

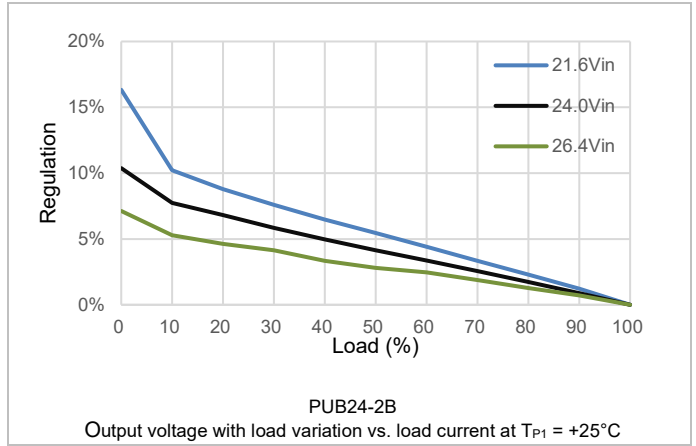


#### Output Ripple & Noise

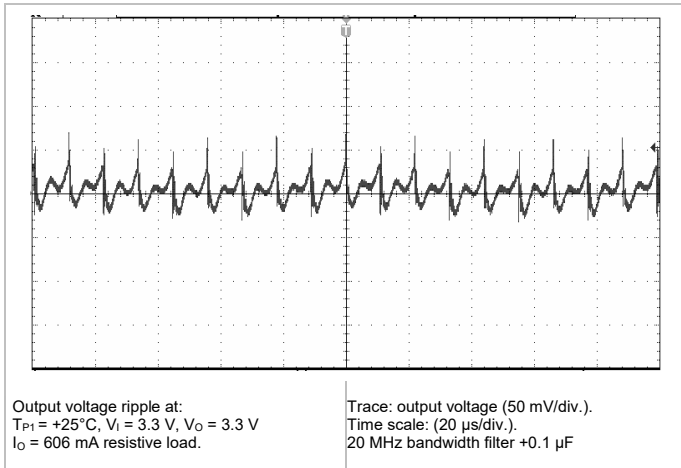


#### Output Ripple & Noise

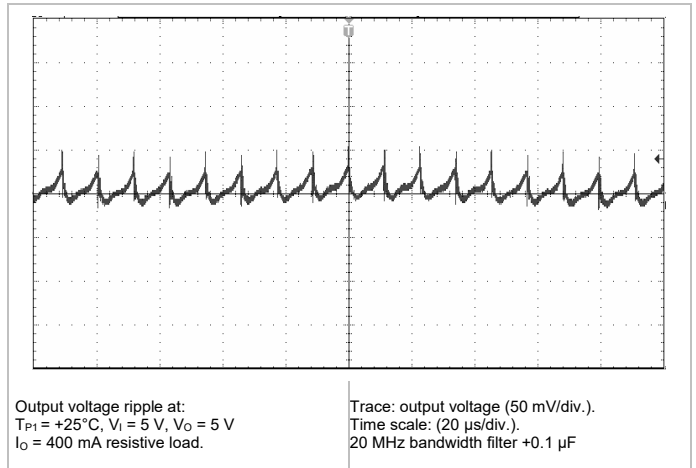

#### Output Ripple & Noise

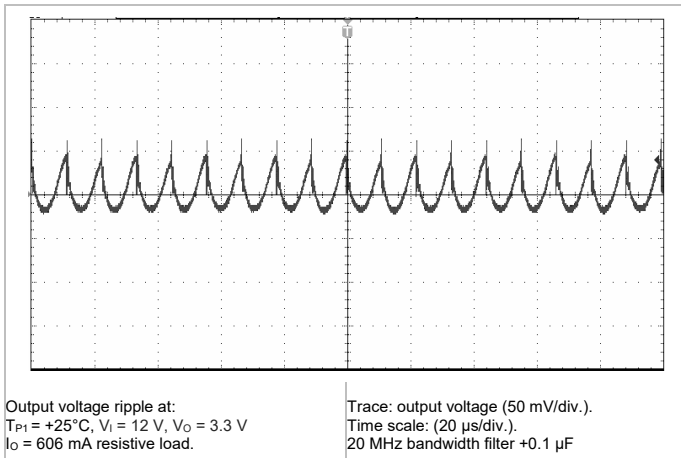

#### Output Ripple & Noise

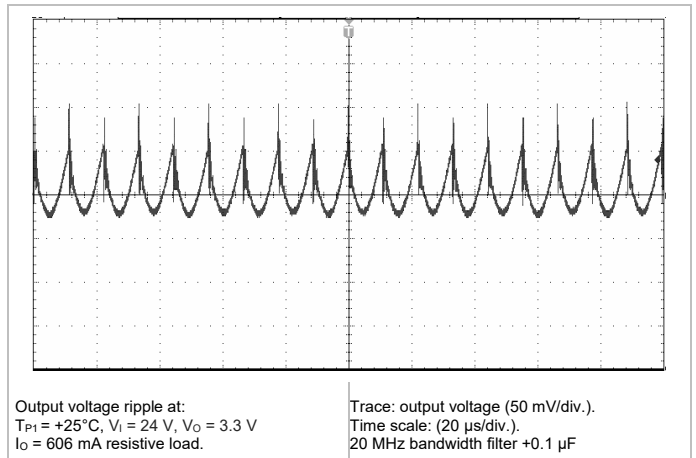



**PUB-2B series DC/DC Converters**  
Isolated 2W Unregulated Single/Dual Output

28701-BMR805 Rev. B


March 2021

© Flex

**Typical Characteristics**

**PUB-2B series**


**Start-up**

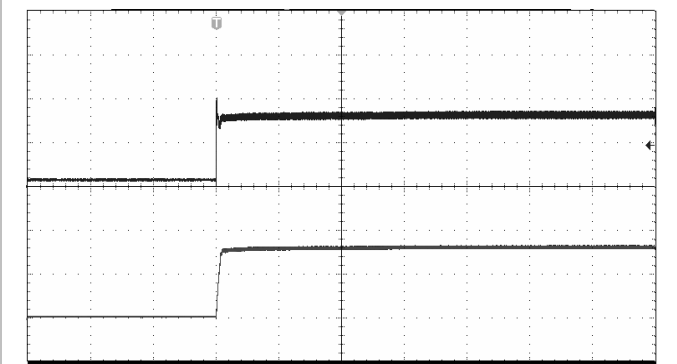

Start-up, enabled by connecting  $V_I$  at:  
 $T_{P1} = +25^\circ\text{C}$ ,  $V_I = 3.3\text{ V}$ ,  $V_O = 3.3\text{ V}$   
 $I_O = 606\text{ mA}$  resistive load.

Top trace: Input voltage (2 V/div.).  
Bottom trace: - Output voltage (2 V/div.).  
Time scale: (2 ms/div.).


**Shut-down**

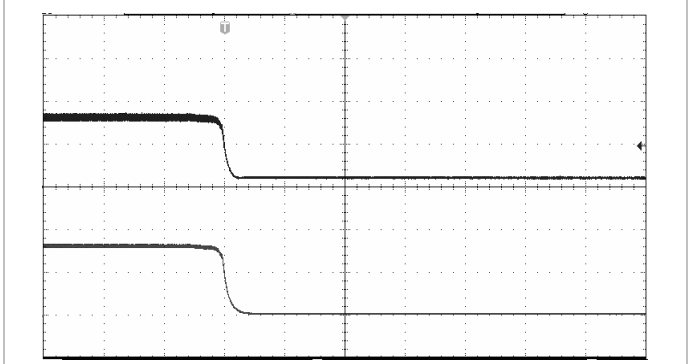

Start-up, enabled by connecting  $V_I$  at:  
 $T_{P1} = +25^\circ\text{C}$ ,  $V_I = 3.3\text{ V}$ ,  $V_O = 3.3\text{ V}$   
 $I_O = 606\text{ mA}$  resistive load.

Top trace: Input voltage (2 V/div.).  
Bottom trace: - Output voltage (2 V/div.).  
Time scale: (2 ms/div.).


**Start-up**

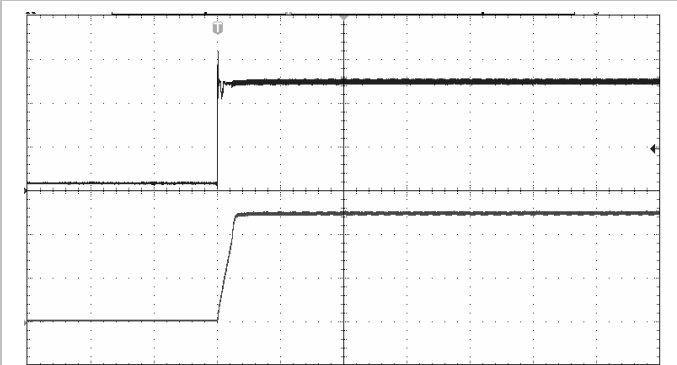

Start-up, enabled by connecting  $V_I$  at:  
 $T_{P1} = +25^\circ\text{C}$ ,  $V_I = 5\text{ V}$ ,  $V_O = 5\text{ V}$   
 $I_O = 400\text{ mA}$  resistive load.

Top trace: Input voltage (2 V/div.).  
Bottom trace: Output voltage (2 V/div.).  
Time scale: (2 ms/div.).


**Shut-down**

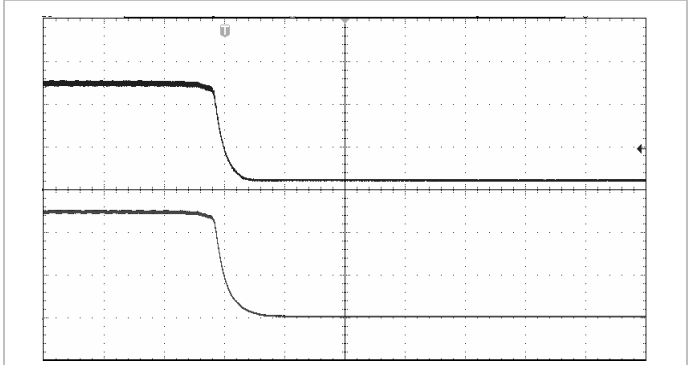

Shut-down, closed by disconnecting  $V_I$  at:  
 $T_{P1} = +25^\circ\text{C}$ ,  $V_I = 5\text{ V}$ ,  $V_O = 5\text{ V}$   
 $I_O = 400\text{ mA}$  resistive load.

Top trace: Input voltage (2 V/div.).  
Bottom trace: Output voltage (2 V/div.).  
Time scale: (2 ms/div.).


**Start-up**

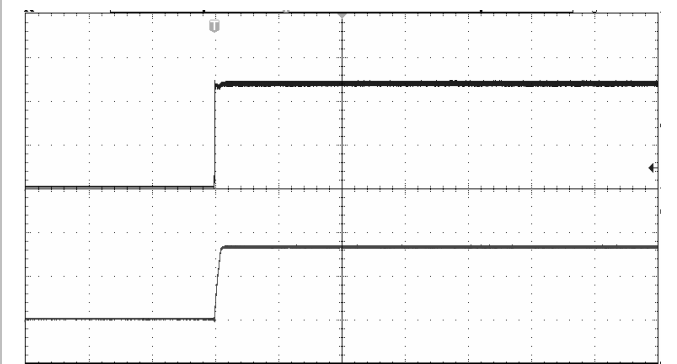

Start-up, enabled by connecting  $V_I$  at:  
 $T_{P1} = +25^\circ\text{C}$ ,  $V_I = 12\text{ V}$ ,  $V_O = 3.3\text{ V}$   
 $I_O = 606\text{ mA}$  resistive load.

Top trace: Input voltage (5 V/div.).  
Bottom trace: Output voltage (2 V/div.).  
Time scale: (2 ms/div.).

**Shut-down**

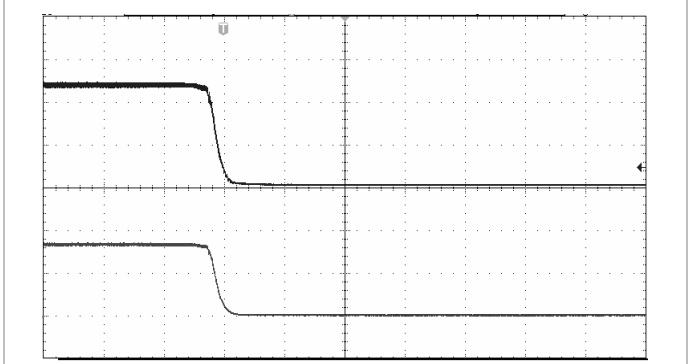

Shut-down, closed by disconnecting  $V_I$  at:  
 $T_{P1} = +25^\circ\text{C}$ ,  $V_I = 12\text{ V}$ ,  $V_O = 3.3\text{ V}$   
 $I_O = 600\text{ mA}$  resistive load.

Top trace: Input voltage (5 V/div.).  
Bottom trace: Output voltage (2 V/div.).  
Time scale: (2 ms/div.).

Technical Specification

**PUB-2B series DC/DC Converters**  
 Isolated 2W Unregulated Single/Dual Output

28701-BMR805 Rev. B


March 2021

© Flex

Typical Characteristics

PUB-2B series


Start-up

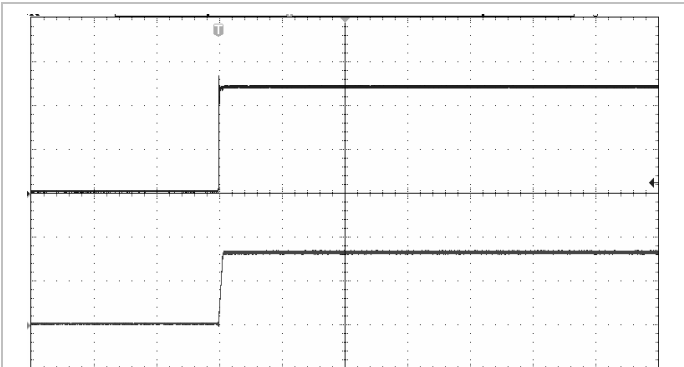

Start-up, enabled by connecting  $V_I$  at:  
 $T_{P1} = +25^{\circ}\text{C}$ ,  $V_I = 24\text{ V}$ ,  $V_O = 3.3\text{ V}$   
 $I_O = 606\text{ mA}$  resistive load.

Top trace: Input voltage (10 V/div.).  
 Bottom trace: - Output voltage (2 V/div.).  
 Time scale: (2 ms/div.).

Shut-down

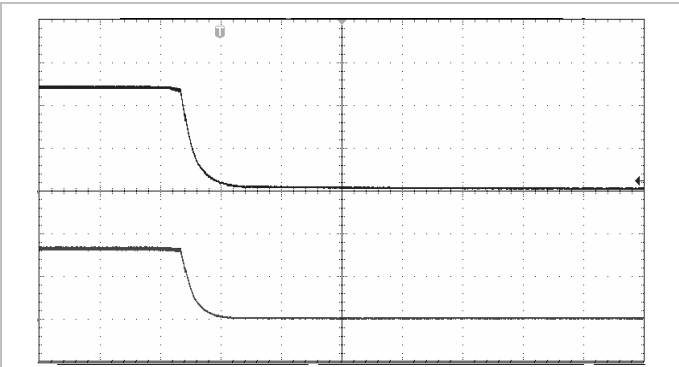

Shut-down, closed by disconnecting  $V_I$  at:  
 $T_{P1} = +25^{\circ}\text{C}$ ,  $V_I = 24\text{ V}$ ,  $V_O = 3.3\text{ V}$   
 $I_O = 606\text{ mA}$  resistive load.

Top trace: Input voltage (10 V/div.).  
 Bottom trace: - Output voltage (2 V/div.).  
 Time scale: (2 ms/div.).

Technical Specification

**PUB-2B series DC/DC Converters**  
Isolated 2W Unregulated Single/Dual Output

28701-BMR805 Rev. B

March 2021

© Flex

**EMC Specification**


Conducted EMI measured according to EN55032, CISPR 32 and FCC part 15J (see test set-up). See Design Note 029 for further information. The minimum switching frequency is 20 kHz. The EMI characteristics below is measured at max I<sub>o</sub>.

**Optional external filter for class B**


Suggested external input filter in order to meet class B in EN 55032, CISPR 32 and FCC part 15J.

Series	L1	C1
PUB03-2B	22μH	10μF
PUB05-2B	22μH	4.7μF
PUB12-2B	47μH	4.7μF
PUB24-2B	47μH	10μF

Based on different applications or PCB layout conditions, the EMI requirement may be varied. Recommend to reserve Cy1 for better EMI performance. Depending on the different requirement of end users, the value of Cy1 could be adjusted from 33pF to 470pF.

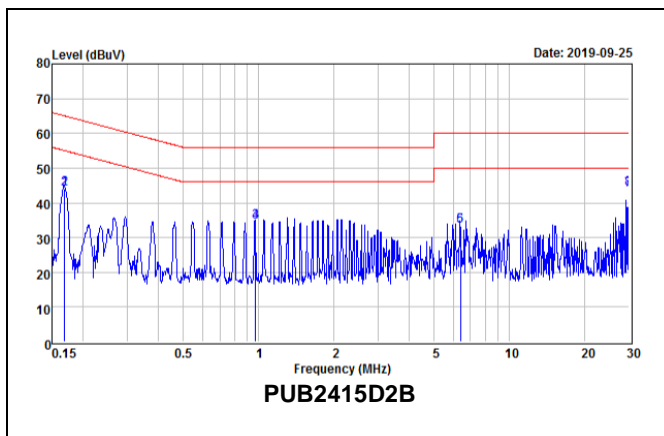

EMI with filter

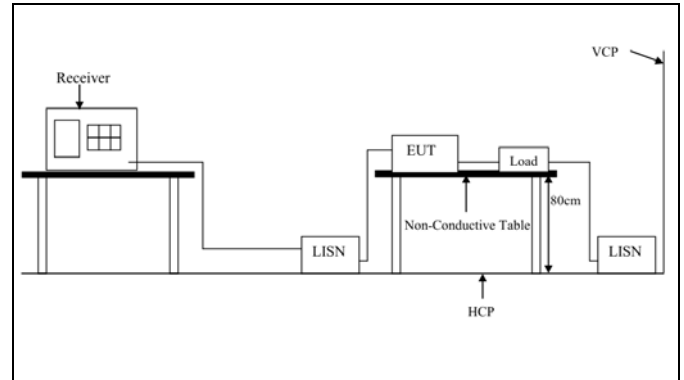

Test set-up


**Layout recommendations**

The radiated EMI performance of the product will depend on the PWB layout and ground layer design. It is also important to consider the stand-off of the product. If a ground layer is used, it should be connected to the output of the product and to the equipment ground or chassis.

A ground layer will increase the stray capacitance in the PWB and improve the high frequency EMC performance.

**Output ripple and noise**

Output ripple and noise is measured according to figure below. See Design Note 022 for detailed information.

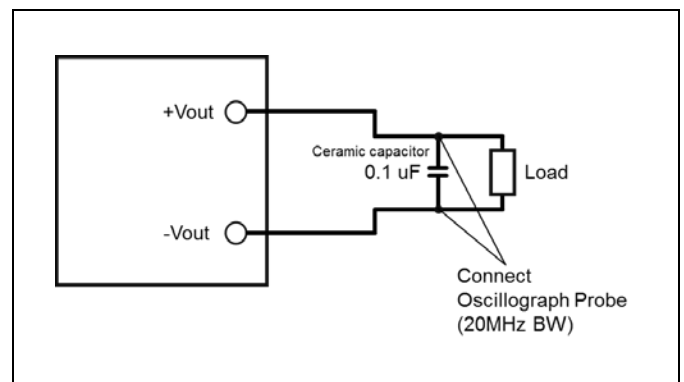

Output ripple and noise test setup

## Technical Specification

<b>PUB-2B series DC/DC Converters</b> Isolated 2W Unregulated Single/Dual Output	28701-BMR805 Rev. B	March 2021
	© Flex	

## Operating Information

### Input Voltage

Converter with 10% input voltage range, mainly for isolated power in industrial applications. For example, the input voltage range 4.5 to 5.5 Vdc meets requirement of general industrial used for 5Vdc system.

The input voltage should never exceed the absolute voltage of the converter, and the ambient temperature must be limited to absolute max +95°C.

The output voltage related to input voltage. Take 5Vin and 5Vo product as an example, if input voltage above 5V, the output voltage will higher than 5V. Below 5V and the output voltage starts to track the input voltage.

Short duration transient disturbances can occur on the DC distribution and input of the product when a short circuit fault occurs on the equipment side of a protective device (fuse or circuit breaker). The voltage level, duration and energy of the disturbance are dependent on the particular DC distribution network characteristics and can be sufficient to damage the product unless measures are taken to suppress or absorb this energy. The transient voltage can be limited by capacitors and other energy absorbing devices like Zener diodes connected across the positive and negative input conductors at a number of strategic points in the distribution network. The end-user must secure that the transient voltage will not exceed the value stated in the Absolute maximum ratings. ETSI TR 100 283 examines the parameters of DC distribution networks and provides guidelines for controlling the transient and reduce its harmful effect.

### Turn-off Input Voltage

The products do not have under voltage lock-out function. Please make sure the input voltage of each module is correct working range.

### Input and Output Impedance

The impedance of both the input source and the load will interact with the impedance of the product. It is important that the input source has low characteristic impedance. The product are designed for stable operation without external capacitors. With a 10 $\mu$ F capacitors connected to the input could reduce the input noise cause by parasitic inductance.

### External Decoupling Capacitors

When powering loads with significant dynamic current requirements, the voltage regulation at the load can be improved by addition of decoupling capacitors at the load. The most effective technique is to locate low ESR ceramic and electrolytic capacitors as close to the load as possible, using several parallel capacitors to lower the effective ESR. The ceramic capacitors will handle high-frequency dynamic load changes while the electrolytic capacitors are used to handle

low frequency dynamic load changes. It is equally important to use low resistance and low inductance PWB layouts and cabling.

External decoupling capacitors will become part of the product's control loop. The control loop is optimized for a wide range of external capacitance and the maximum and minimum recommended value that could be used without any additional analysis is found in the Electrical specification. The ESR of the capacitors is a very important parameter. Stable operation is guaranteed with a verified ESR value of >1 m $\Omega$  across the output connections.

For further information please contact your local Flex Power Modules representative.

### Parallel Operation

This product is not designed for paralleling without using external current sharing circuits. See Design Note 006 for detailed information.

### Over Current Protection (OCP)

The products include current limiting circuitry for protection at continuous overload. The OCP works in a hiccup mode and will make continuous attempts to start up and will resume normal operation automatically after removal of the over current condition. The load distribution should be designed for the specified maximum output short circuit current.

Technical Specification

**PUB-2B series DC/DC Converters**  
Isolated 2W Unregulated Single/Dual Output

28701-BMR805 Rev. B

March 2021

© Flex


**Thermal Consideration**

**General**

The products are designed to operate in different thermal environments and sufficient cooling must be provided to ensure reliable operation.

For products mounted on a PWB without a baseplate attached, cooling is achieved mainly by conduction, from the pins to the host board, and convection, which is dependant on the airflow across the product. Increased airflow enhances the cooling of the product. The Output Current Derating graph found in the Output section for each model provides the available output current vs. ambient air temperature and air velocity.


The product is tested on a 95 x 85 mm, 35 µm (1 oz), 2-layer test board mounted horizontally in a space with a volume of 300(L) x 300(W) x 200(H) mm.

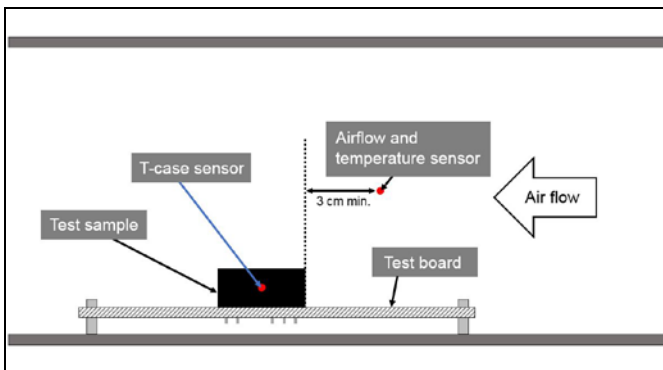

**Definition of product operating temperature**


The temperature at the position P1 ( $T_{P1}$ ) should not exceed the maximum temperatures in the table below. The number of measurement points may vary with different thermal design and topology. Temperatures above maximum measured at the reference point P1 are not allowed and may cause permanent damage.

Position	Description	Max Temp.
P1	Driver, Reference point	$T_{P1}=105^{\circ}\text{C}$

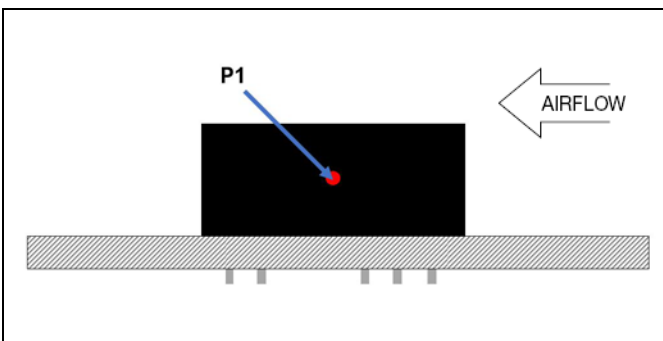

Pin side (baseplate module)


**Connections**

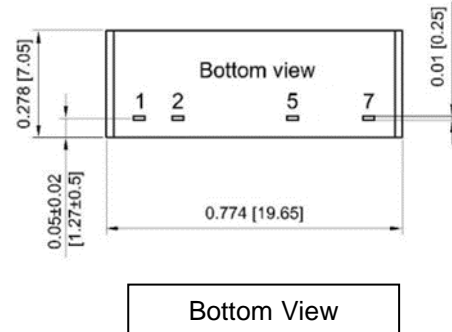

**PUBxxxS2B single output series**

Pin	Designation	Function
1	+Vin	Positive Input
2	-Vin	Negative Input
5	-Vo	Negative Output
7	+Vo	Positive Output

**Connections**

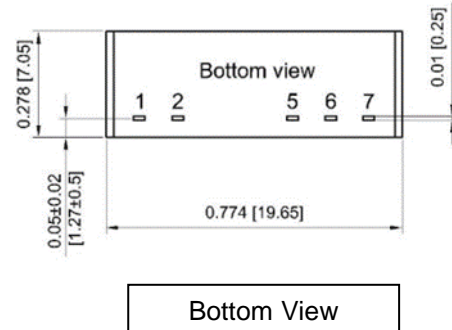

**PUBxxxD2B dual output series**

Pin	Designation	Function
1	+Vin	Positive Input
2	-Vin	Negative Input
5	-Vo	Negative Output
6	COM	Common
7	+Vo	Positive Output

Technical Specification



**PUB-2B series DC/DC Converters**  
Isolated 2W Unregulated Single/Dual Output

28701-BMR805 Rev. B

March 2021

© Flex

**Mechanical Information – Through Hole Mounting**

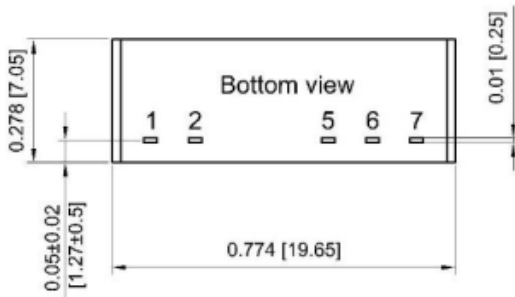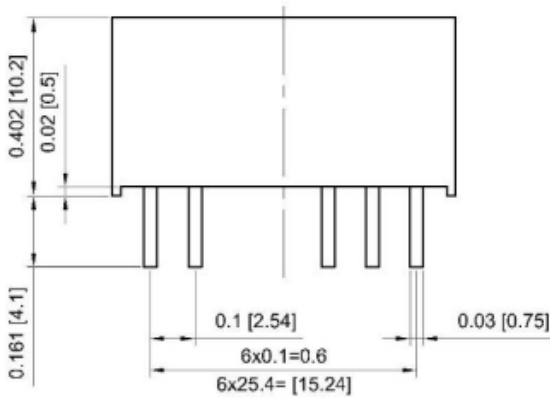


All Dimensions Inches(mm)


Tolerance	Inches	Millimeters
	±0.01	±0.25
PIN	±0.004	±0.1

**Recommended Footprint**

• Single

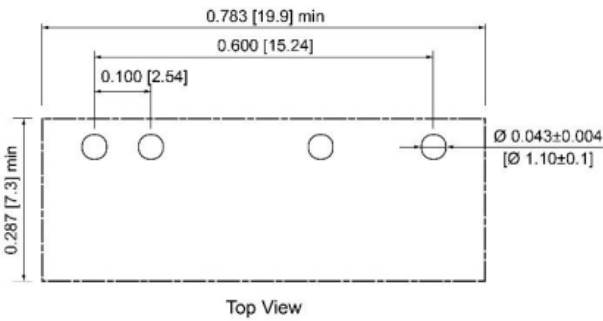

• Dual

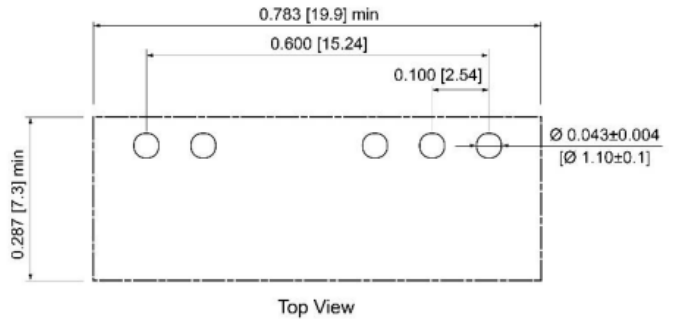

Technical Specification

<b>PUB-2B series DC/DC Converters</b> Isolated 2W Unregulated Single/Dual Output	28701-BMR805 Rev. B	March 2021
	© Flex	

**Soldering Information - Hole Mounting**

The hole mounted product is intended for plated through hole mounting by wave or manual soldering. The pin temperature is specified to maximum to 260°C for maximum 5 seconds.


A maximum preheat rate of 4°C/s and maximum preheat temperature of 150°C is suggested. When soldering by hand, care should be taken to avoid direct contact between the hot soldering iron tip and the pins for more than a few seconds in order to prevent overheating.

A no-clean flux is recommended to avoid entrapment of cleaning fluids in cavities inside the product or between the product and the host board. The cleaning residues may affect long time reliability and isolation voltage.

**Delivery Package Information**

The products are delivered in antistatic tube.

Tube Specifications – SIP	
<b>Material</b>	Antistatic PS
<b>Surface resistance</b>	$10^5 < \text{Ohm/square} < 10^{12}$
<b>Tube length</b>	520 mm 20.47 [ inch]
<b>Tube capacity</b>	25 products (36 full tubes/box)
<b>Tube weight</b>	20.4 g empty, 100 g full tube

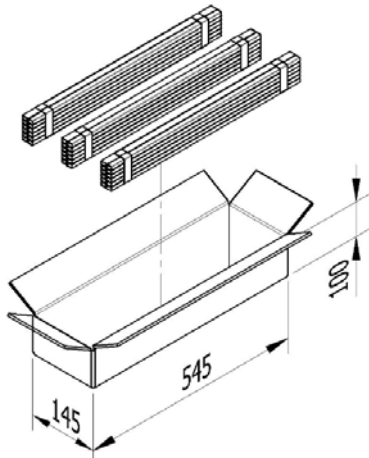

1BOX = 25 (pcs/tube) \* 12(tube/bundle) \* 3 (bundle) = 900pcs

1BOX = 900 converters

All dimensions in mm

Note: pick up positions refer to center of pocket.

See mechanical drawing for exact location on product.

## Technical Specification

<b>PUB-2B series DC/DC Converters</b> Isolated 2W Unregulated Single/Dual Output	28701-BMR805 Rev. B	March 2021
	© Flex	

## Product Qualification Specification

Characteristics			
External visual inspection	IPC-A-610		
Change of temperature (Temperature cycling)	MIL-STD-202G, method 107G	Temperature range Number of cycles Dwell/transfer time	-55 to 125°C 1000 30 min/0-1 min
Cold (in operation)	IEC 60068-2-1 Ad	Temperature T <sub>A</sub> Duration	-40°C 72 h
Damp heat	MIL-STD-202G, Method 103B	Temperature Humidity Duration	85°C 95 % RH 1000 hours
Dry heat	IEC 60068-2-2 Bd	Temperature Duration	125°C 1000 h
Electrostatic discharge susceptibility	IEC 61000-4-2	Air model Contact model	8000 V 6000 V
Mechanical shock	MIL-STD-202G, method 213B	Peak acceleration Duration	100 g 6 ms
Operational life test	MIL-STD-202G, method 108A	Duration	1000 h
Resistance to soldering heat <sup>1</sup>	MIL-STD-202G, method 210F	Solder temperature Duration	260°C 10 s
Robustness of terminations	IEC 60068-2-21 Test Ua1 IEC 60068-2-21 Test Ue1	Through hole mount products Surface mount products	All leads All leads
Solderability	J-STD-002	Preconditioning Temperature, Pb-free	Steam ageing 8 h 245°C
Vibration	MIL-STD-202G, method 201A	Frequency Displacement Duration	10 to 55 Hz 0.06 inch 2 h in each direction

## Notes

<sup>1</sup> Only for products intended for wave soldering (plated through hole products)