


DATASHEET

• Tolerances down to 10 PPM

Stabilities down to 5 PPM

• C3BS STANDARD SPECIFICATIONS ¹					
PARAMETERS	MAX (unless otherwise noted)				
Frequency Range	10.000 ~ 200.000 MHz				
Frequency Tolerance @ 25°C	(See options on page 2)				
Frequency Stability, ref @ 25°C	(See options below)				
Temperature Range					
Operating (TOPR)	(See options below)				
Storage (Tstg)	-55°C ~ +125°C				
Shunt Capacitance (Co)	3.0 pF				
Load Capacitance (CL)	(See options on page 2)				
Drive Level	0.1 mW				
Aging per year	±5 PPM				
Maximum Soldering Temp / Time	260°C / 10 Seconds				
Moisture Sensitivity Level (MSL)	1				
Termination Finish	Au				
Seal Method	Seam Seal				
Lead (Pb) Free	Yes				
RoHS Compliant	Yes				

Frequency Range (MHz)	Operating Mode	Max ESR Ω
10.000 ~ 11.999999	Fundamental	250
12.000 ~ 15.999999	Fundamental	120
16.000 ~ 19.999999	Fundamental	70
20.000 ~ 29.999999	Fundamental	50
30.000 ~ 39.999999	Fundamental	40
40.000 ~ 200.000000	Fundamental	35
50.000001 ~ 70.000	3rd OT	120
70.000001 ~ 114.285	3rd OT	80

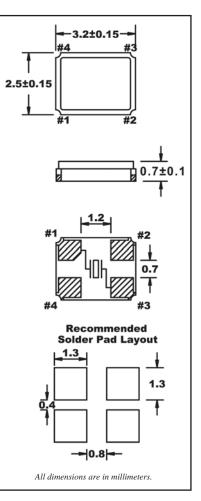

Note: Dimensional drawing is for reference to critical specifications defined by size measurements. Certain non-critical visual attributes, such as side castellations, etc. may vary.


• Available Operating Temperatures and Stabilities*

Operating Temperature	±5 PPM	±10 PPM	±15 PPM	±20 PPM	±25 PPM	±30 PPM	±50 PPM
-10 ~+60°C	0	0	0	0	0	0	0
-20 ~+70°C	Х	0	0	0	0	0	0
-40 ~+85°C**	Х	Х	0	0	0	0	0

Key: O=Available, X=Not Available *Does not imply a stocked part.

2A	Title / Description: C3BS SERIES STANDARD SPECIFICATIONS			
FÜX	Drawing Number: 101138	Size: A		
FOX	Part Number:	Cage: 61429		
© Copyright 2017 Fox Electronics, All rights reserved	Draftsperson: CMR	Approved: RB	Revision Date: 5/25/2017	



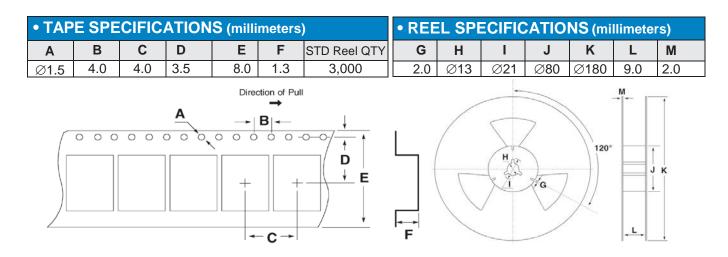

Available Options & Part Identification for Ceramic SMD Crystal C3BS* <u>F C3BS B B G M 25.0</u>

F	C3BS	В	В	G	М	25.0
<u>FOX</u>	Model <u>Number</u>	Tolerance B=50ppm C=30ppm D=25ppm E=20ppm F=15ppm H=10ppm	Stability B=50ppm C=30ppm D=25ppm E=20ppm F=15ppm H=10ppm L=5ppm	Load <u>Capacitance</u> V=7pF D=8pF W=9pF E=10pF G=12pF J=15pF K=16pF L=18pF M=20pF N=22pF	Operating <u>Temperature</u> D=-10 to +60C F=-20 to +70C M=-40 to +85C	Frequency <u>(MHz)</u>

*Not all frequency, tolerance, stability, load, and operating temperature combinations may be available.



Corporate Headquarters 5570 Enterprise Parkway Fort Myers, FL 33905 http://www.FOXONLINE.com Sales

1-239-693-0099

1-888-GET-2-FOX (1-888-438-2369) or

http://www.FOXONLINE.com/repdisty

Tech Support

http://www.FOXONLINE.com/email

PRODUCT USE: Fox Electronics reserves the right to modify the products and/or specifications described herein at any time and at Fox Electronics' sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of Fox Electronics' products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of Fox Electronics.

Fox Electronics' products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of a Fox Electronics product can be reasonably expected to significantly affect the health or safety of users. Anyone using a Fox Electronics product in such a manner does so at their own risk, absent an express, written agreement by Fox Electronics.

Fox Electronics and the Fox logo are registered trademarks of Fox Electronics. Product specification is subject to change without notice. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of Fox Electronics or their respective third party owners. For datasheet type definitions and a glossary of common terms, visit http://www.foxonline.com/tgcrystals.html.

670 670	Title / Description: C3BS SERIES STANDARD SPECIFICATIONS			
	Drawing Number: 101138	Size: A		
FÖX	Part Number:	Cage: 61429		
© Copyright 2017 Fox Electronics, All rights reserved	Draftsperson: CMR	Approved: RB	Revision Date: 5/25/2017	