



1.6 x 1.2mm Ceramic SMD Crystal

C0BS

(former FX1612B)

DATASHEET

- Tolerances down to ± 10 PPM
- Stabilities down to ± 10 PPM
- Temperature Ranges as wide as -55°C to $+125^{\circ}\text{C}$

• SPECIFICATIONS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range	23.900 ~ 80.000 MHz
Frequency Tolerance @ 25°C	(See options on page 2)
Frequency Stability, ref @ 25°C	(See options below)
Temperature Range	
Operating (TOPR)	(See options below)
Storage (TSTG)	$-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Shunt Capacitance (C_0)	3 pF
Load Capacitance (C_L)	(See options on page 2)
Drive Level	100 μW
Aging per year	± 3 PPM

Frequency Range (MHz)	Operating Mode	Max ESR Ω
23.900 ~ 29.999999 MHz	Fundamental	150
30.000 ~ 80.000 MHz	Fundamental	100

• Available Operating Temperatures and Stabilities*

Operating Temperature	± 10 PPM	± 15 PPM	± 20 PPM	± 25 PPM	± 30 PPM	± 50 PPM	± 100 PPM
-10 ~ +60°C	O	O	O	O	O	O	N/A
-10 ~ +70°C	O	O	O	O	O	O	N/A
-20 ~ +70°C	O	O	O	O	O	O	N/A
-30 ~ +85°C	X	O	O	O	O	O	N/A
-40 ~ +85°C	X	O	O	O	O	O	N/A
-40 ~ +105°C	X	X	X	X	X	O	O
-40 ~ +125°C	X	X	X	X	X	O	O
-55 ~ +125°C	X	X	X	X	X	O	O

Key: O=Available, X=Not Available, N/A = Not Applicable

*Does not imply a stocked part.






1.6 x 1.2mm Ceramic SMD Crystal

C0BS


(former FX1612B)

DATASHEET

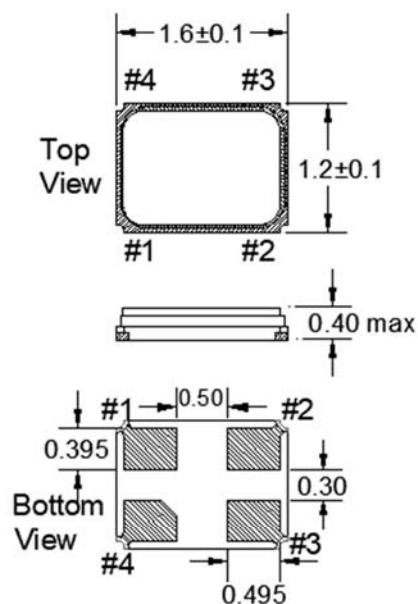

#1 - Crystal #2 Lid - connect to GND
#4 - NC #3 - Crystal

Recommended Solder Pad Layout

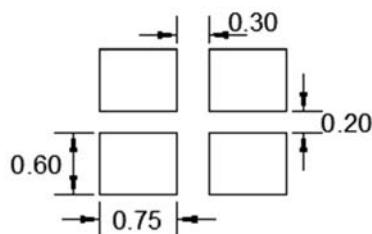

Dimensions are in millimeters.

Note: Dimensional drawing is for reference to critical specifications defined by size measurements.

Certain non-critical visual attributes, such as side castellations, reference pin shape, reference pin location, etc. may vary.

Maximum Soldering Temp / Time	260°C/10 Seconds x2
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au over Ni
Seal Method	Seam
Lead (Pb) Free	Yes
ROHS/REACH Compliant	Yes





1.6 x 1.2mm Ceramic SMD Crystal

C0BS

(former FX1612B)

DATASHEET

• TAPE SPECIFICATIONS (millimeters)							• REEL SPECIFICATIONS (millimeters)						
A	B	C	D	E	F	STD Reel QTY	G	H	I	J	K	L	M
Ø1.55	4.0	4.0	3.5	8.0	0.45	-T1 = 1,000 -T2 = 2,000 -T3 = 3,000	2.0	Ø13	Ø21	Ø60	Ø180	9.0	1.2

Available Options & Part Identification for Crystal Model C0BS¹

F C0BS B C V M 40.0

F	C0BS	B	C	V	M	40.0
FOX	Model Number	Tolerance B = ±50ppm C = ±30ppm D = ±25ppm E = ±20ppm F = ±15ppm H = ±10ppm	Stability A = ±100ppm B = ±50ppm C = ±30ppm D = ±25ppm E = ±20ppm F = ±15ppm H = ±10ppm	Load Capacitance² C = 4 pF V = 7 pF D = 8 pF E = 10 pF G = 12 pF M = 20 pF	Operating Temperature C = 0 to +70°C D = -10 to +60°C E = -10 to +70°C F = -20 to +70°C K = -30 to +85°C M = -40 to +85°C P = -40 to +105°C I = -40 to +125°C T = -55 to +125°C	Frequency (MHz)

¹ Not all frequency, tolerance, stability, load, and operating temperature combinations may be available.

² Listed Load Capacitances represent those most commonly used. Other load capacitance values are available.



Corporate Headquarters
5570 Enterprise Parkway
Fort Myers, FL 33905
<http://www.FOXONLINE.com>

Sales
1-888-GET-2-FOX (1-888-438-2369) or
1-239-693-0099
<http://www.FOXONLINE.com/repdisty>

Tech Support
<http://www.FOXONLINE.com/email>

PRODUCT USE: Fox Electronics reserves the right to modify the products and/or specifications described herein at any time and at Fox Electronics' sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of Fox Electronics' products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of Fox Electronics or any third parties.

Fox Electronics' products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of a Fox Electronics product can be reasonably expected to significantly affect the health or safety of users. Anyone using a Fox Electronics product in such a manner does so at their own risk, absent an express, written agreement by Fox Electronics.

Fox Electronics and the Fox logo are registered trademarks of Fox Electronics. Product specification is subject to change without notice. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of Fox Electronics or their respective third-party owners. For datasheet type definitions and a glossary of common terms, visit <http://www.foxonline.com/tgcrystals.html>.



© Copyright 2019 Fox Electronics. All rights reserved

Title / Description: C0BS SERIES STANDARD SPECIFICATIONS

Drawing Number: C0BS-DOC-1

Part Number:

Draftsperson: MAJ

Size: A

Case: 61429

Revision Date: 06/24/2019

Approved: BEC