

1

2

3

4


Part Number	CONFIGURATION												
	POS	12	11	10	9	8	7	6	5	4	3	2	1
10126492-X01 OR 10126492-X01LF	D	-	-	-	-	-	-	-	-	-	-	-	-
	C	-	-	-	-	-	-	-	-	-	-	-	-
	B	-	-	-	-	-	-	-	-	-	-	-	-
	A	-	-	-	-	-	-	-	-	-	-	-	-

Part Number	CONFIGURATION												
	POS	12	11	10	9	8	7	6	5	4	3	2	1
10126492-X02 OR 10126492-X02LF	D	-	-	-	-	-	-	-	-	-	-	-	-
	C	-	-	-	-	-	-	-	-	-	-	-	-
	B	-	-	-	-	-	-	-	-	-	-	-	-
	A	-	-	-	-	-	-	-	-	-	-	-	-

P/N 10126492-XYY/XYLF	
DASH NUMBER:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL

A

A

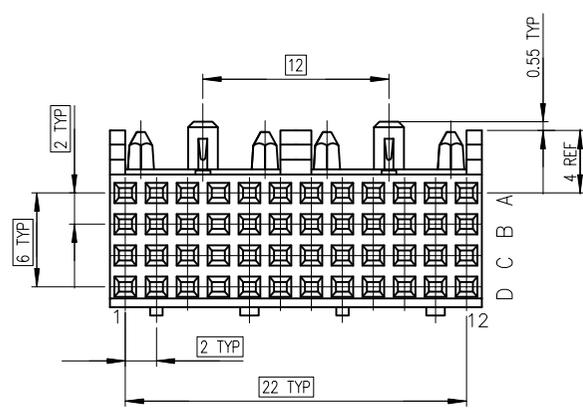


SELECTIVE CONTACT LOADING

NOTE: " - " POSITION LOADED

B

B

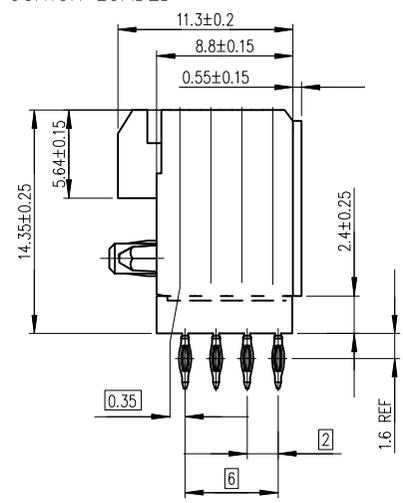

C

C

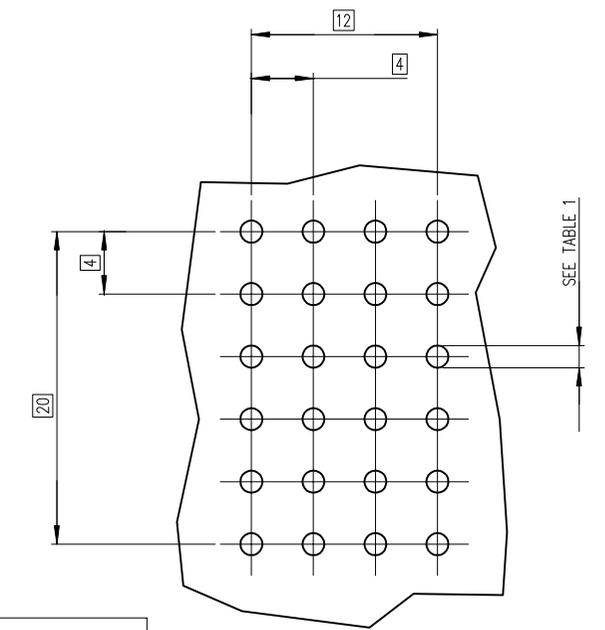
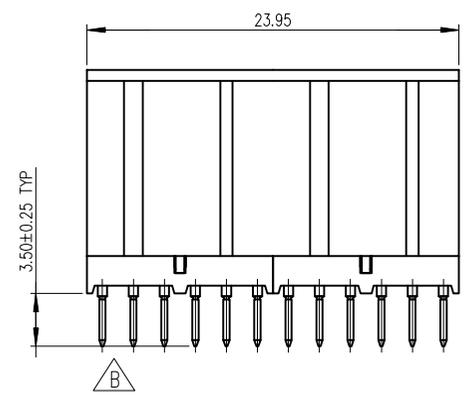


TABLE 1	
PLATED THRU HOLE REQUIREMENTS	
HOLE DIAMETER AFTER PLATING	0.65-0.80
DRILLED HOLE	0.81-0.86 (0.85 DRILL)
COPPER PLATING	0.025 - 0.05
SnPb PLATING	0.005-0.015

LAYOUT FOR P.C.B
scale : 2.0

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE GS-12-447

NOTE-1: MORE INFORMATIONS FOR PCB LAYOUT
SEE GS-12-447

rev	ecn no	dr	date
A	NEW RELEASE	QinDF	2013-11-04
B	ELX-DG-19619	MIC	2014-12-03
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	Michael Song	2014/12/03	ANGULAR	0.X ±0.30	size A3 Scale 3
Eng	Michael Song	2014/12/03	LINEAR	0.XX ±0.15	
Chr	Zhen Luo	2014/12/03	0.XX ±2	0.XXX ±0.10	ECN ELX-DG-19619
Appr	Collins Lu	2014/12/03	Product family METRAL		Spec ref -
		title METRAL FEM. 4 ROW SL STRAIGHT PRESS FIT		dwg no 10126492	Rev. B
		PCB THICKNESS: 2.4 mm MINIMUM		CUSTOMER	sheet 1 of 1
		catalog no -			



Copyright FCI

D

D

1

2

3

4