
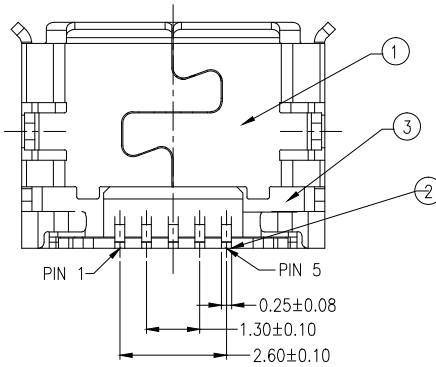
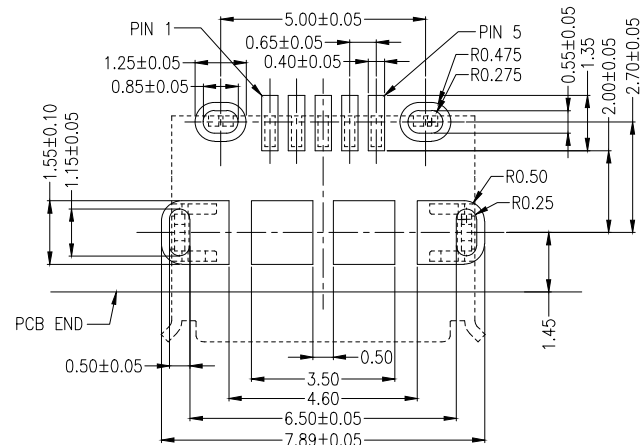
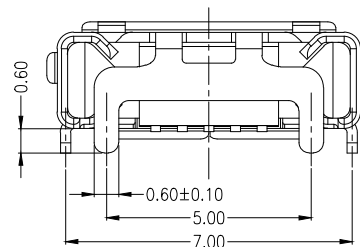
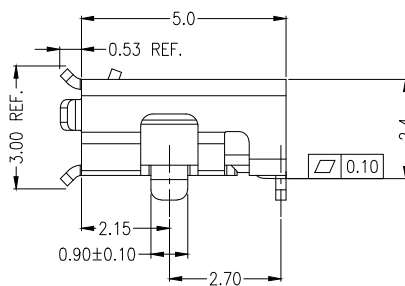
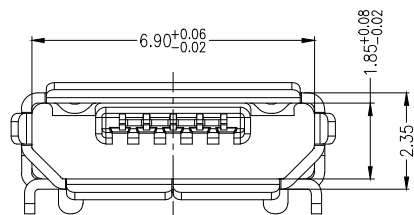
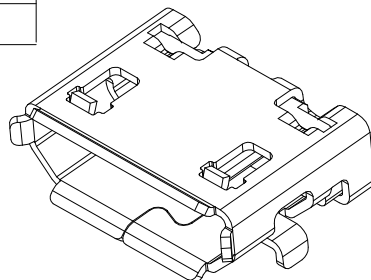





PART NUMBER  
10118194-000XLF

Item	Title	Q'TY
1	Shell	1
2	Terminal	5
3	InsertMolding	1




mat'l. code				surface ASME Y14.5	tolerance ASME Y14.5	projection MM	product family HPL_511
ltr	ecn no	dr	date	tolerances unless otherwise specified		MM scale 1:1	title
A	/	LS	10/21/11	angles	.X±0.38		MICRO USB B TYPE RECEPTACLE
B	ELX-N-23501	LQ	3/11/16	linear	.XX±0.25		
C	ELX-N-25209	LZ	9/29/16	X'±2'	.XXX±0.10		
				dr	JASON_HSU	05/21/11	dwg no
				engr	JASON_HSU	05/21/11	sheet 1 of 2
				chr	JASON_HSU	05/21/11	size
				appd	GARY_HSIEH	05/21/11	A4
sheet index	revision	c					type
	sheet	1					Product Customer Drawing

5. THE "LF" MEANS FOR LEAD FREE AND CAN WITHSTAND EXPOSE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN IR REFLOW PROCESS.

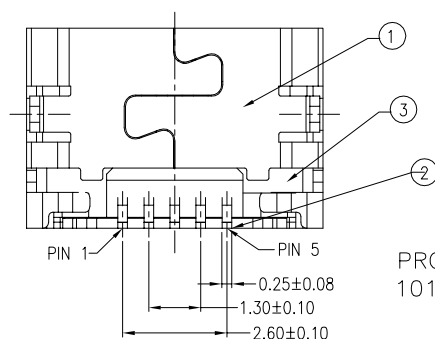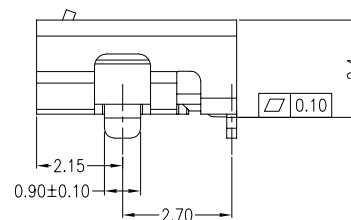

0-WITH FLANGE	SEE SHEET 1
1-WITHOUT FLANGE	SEE SHEET 2

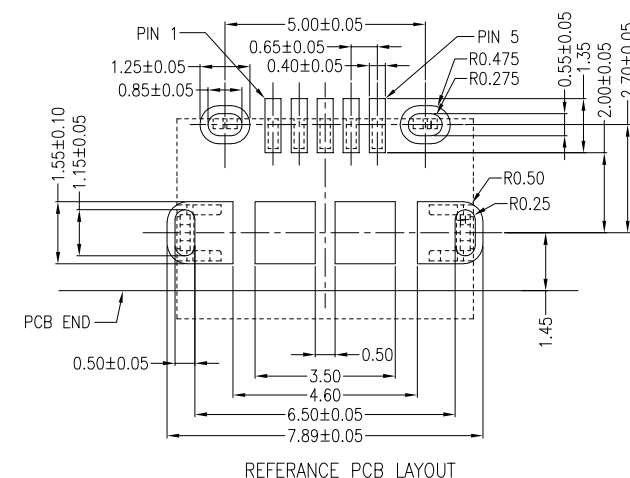4