


PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)
OPERATING TEMPERATURE -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE :0.75 N MAX /CONT
EXTRACTION FORCE: 0.15 N MIN /CONT
INSULATION RESISTANCE :10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG No. BS,C,201844,003)
THIS PRODUCT IS CSA APPROVED
THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

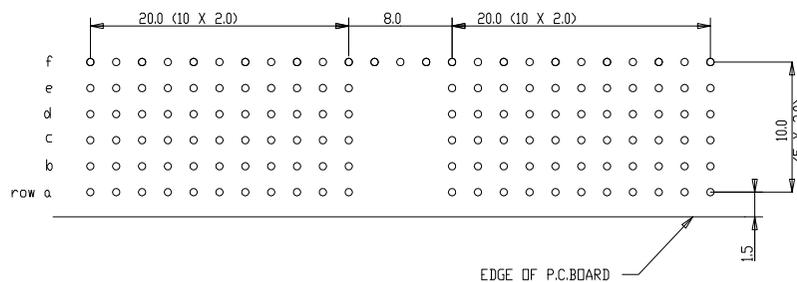

Material		Spec ref		tolerance	projection	MM						
Mat code		Heat treat		±0.05	±0.10	±0.10						
Plating/Finish		✓										
rev	ecn no	dr	date	Dr	30 03 99	M,Fret	Product family	MILLIPACS	size	A1	Scale	5.000
A	CONNECTION	KN	14-9-01	Eng			Model Name	HM2R10P5A108----	ECN			
B	105-0681	ALEX	31/05/05	Chr			Model Revision		REL Level			
C	3005-0278	Kason	02/08/05	Appr								
D	3007-0362	Kason	05/09/07									
E	EG01-010	NZ	10/13/10									
-	-	-	-									
Prd/E file		catalog no		HM2R10P5A108----		CUSTOMER DRAWING		sheet 1 of 1				