

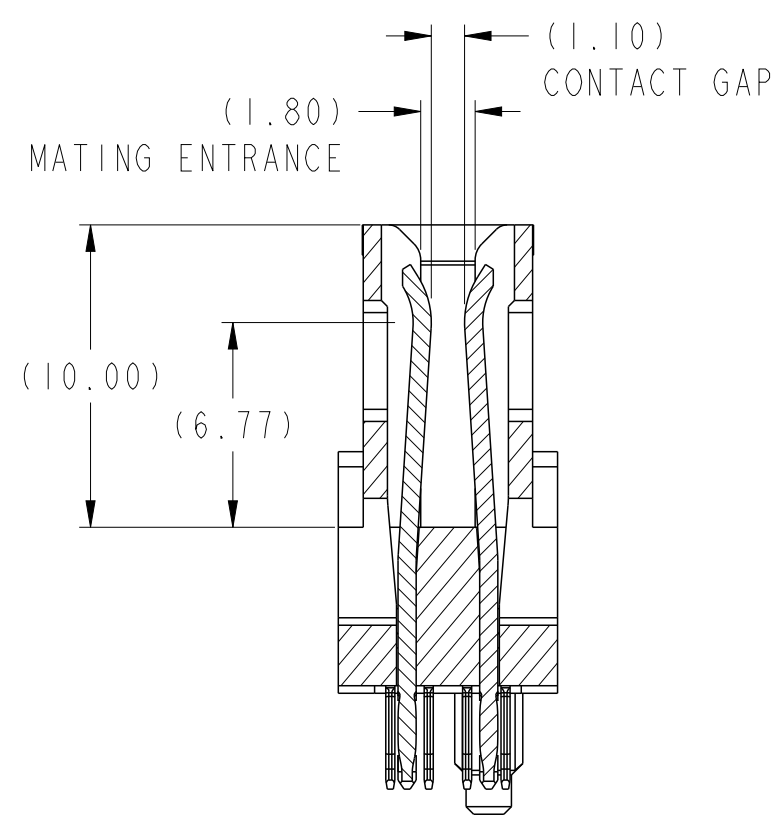
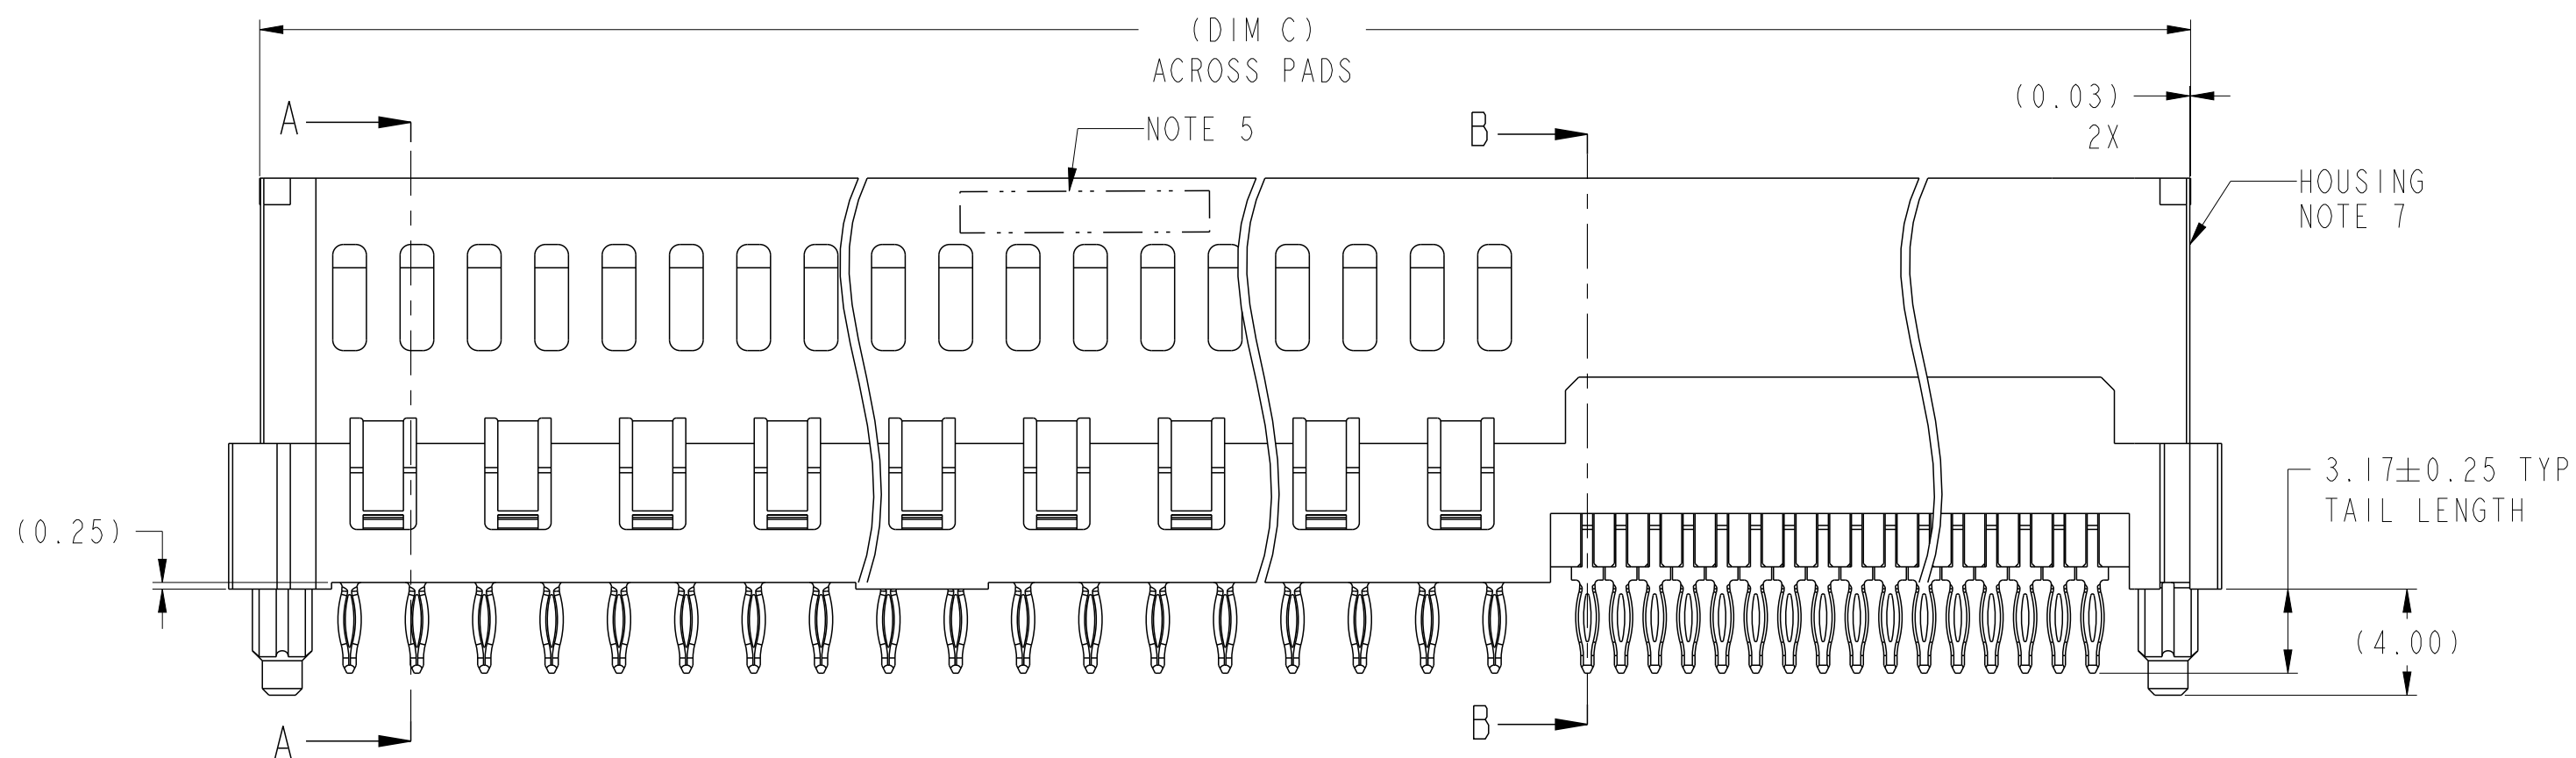


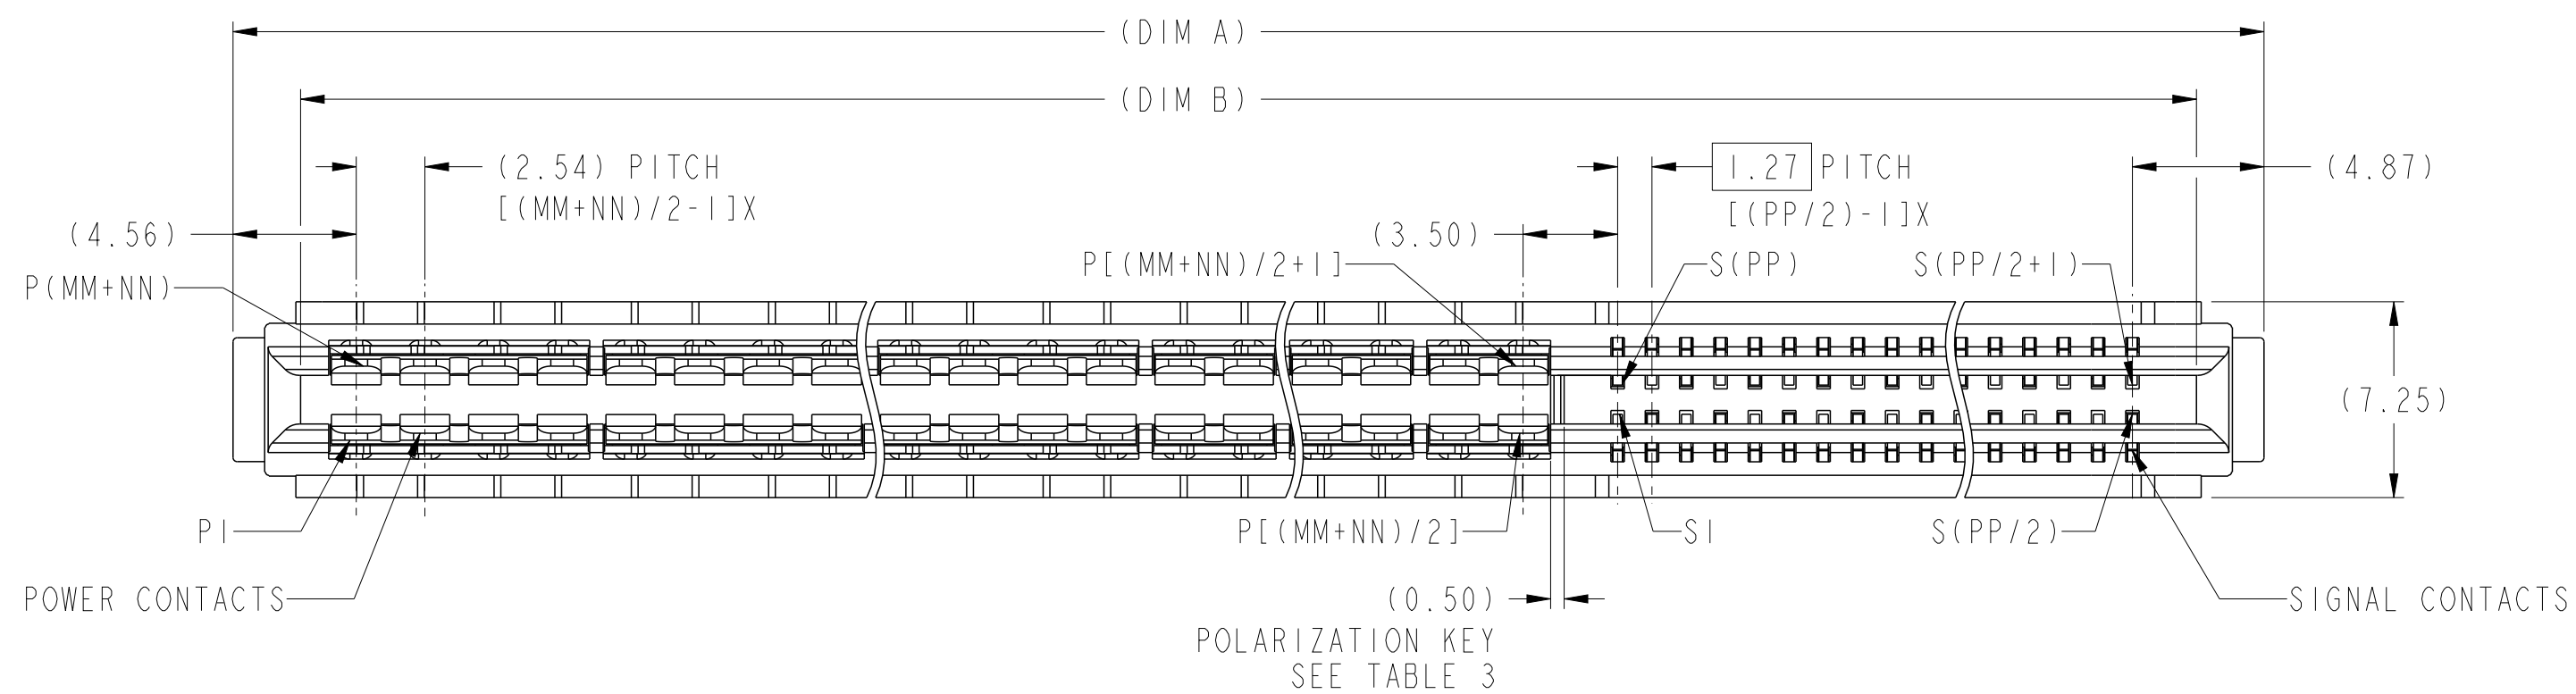

SECTION A-A
SCALE 4:1

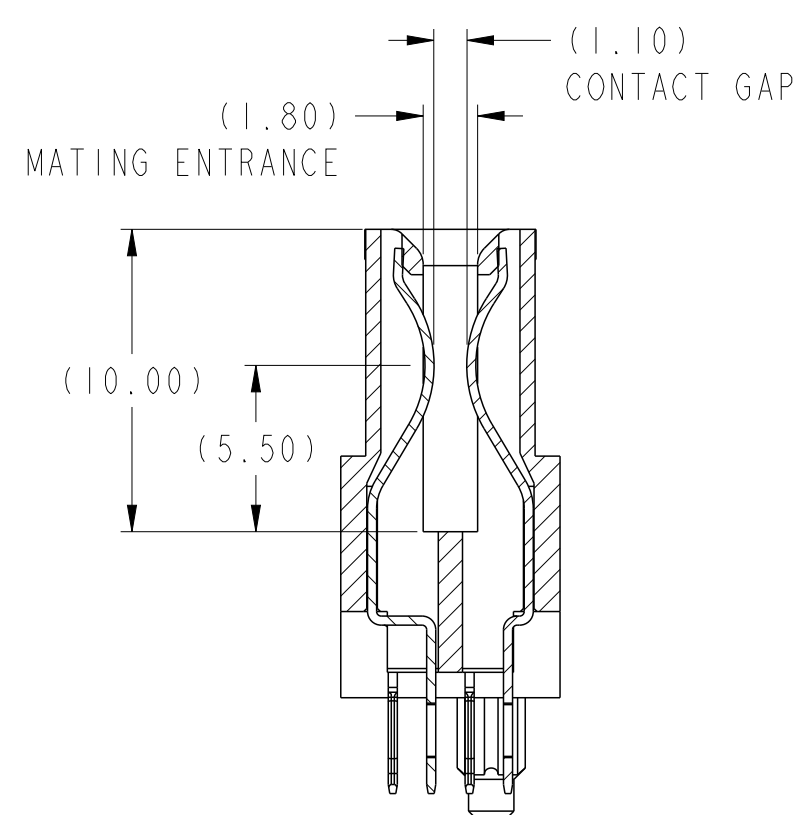

SECTION B-B
SCALE 4:1


REV	EC	DR	DATE
A	---	JW	2012-08-22
B	ELX-DG-012696-1	JW	2012-08-28


spec ref	-	dr	Wei-Long Zhang	2012/07/05	projection	MM	size	A2	scale	1:1
tolerance std	ISO 406 ISO 1101	eng	Wei-Long Zhang	2012/08/28	chr	-	ecn no	ELX-DG-012696-1	rel level	Released
surface	ISO 1302	appr	Pei-Ming Zheng	2012/08/28	product family	STD VERT REC UNIVERSAL HIGH POWER CARD EDGE	cat. no.	10121506	sheet 1 of 4	rev
linear	0.X ±0.3 0.XX ±0.10 0.XXX ±0.05	angular	0° ±2°	www.fci.com	Product - Customer Drw					B


PDS: Rev :B

STATUS:Released


Printed: Aug 28, 2012

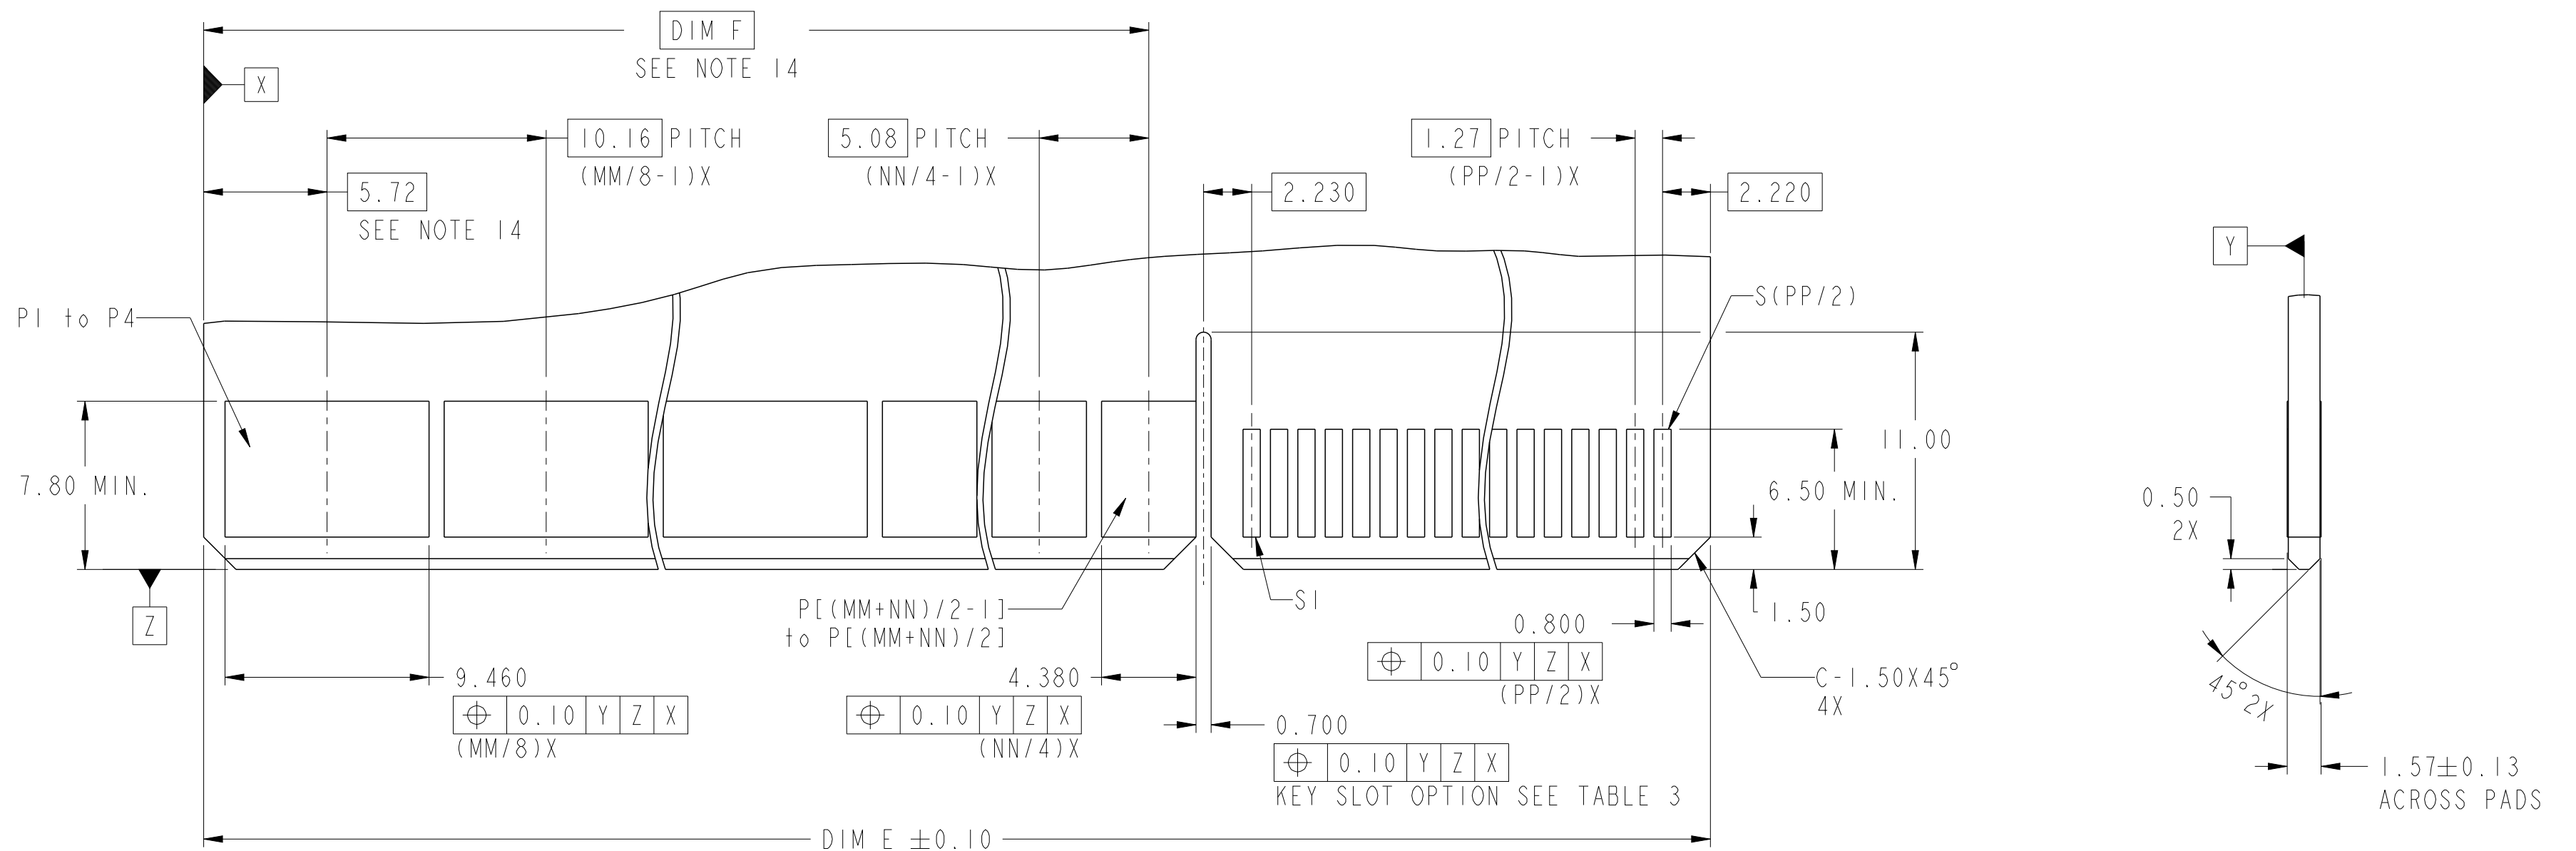

dr	Wei-Long Zhang	2012/07/05			size	A2	scale	1:1
eng	Wei-Long Zhang	2012/08/28			ecn no	ELX-DG-012696-1		
chr	-	-				rel level		
appr	Pei-Ming Zheng	2012/08/28	product family					
	title	STD VERT REC UNIVERSAL			dwg no	10121506		rev
		HIGH POWER CARD EDGE						
www.fci.com	cat. no.	Product - Customer Drw			sheet 3 of 4			

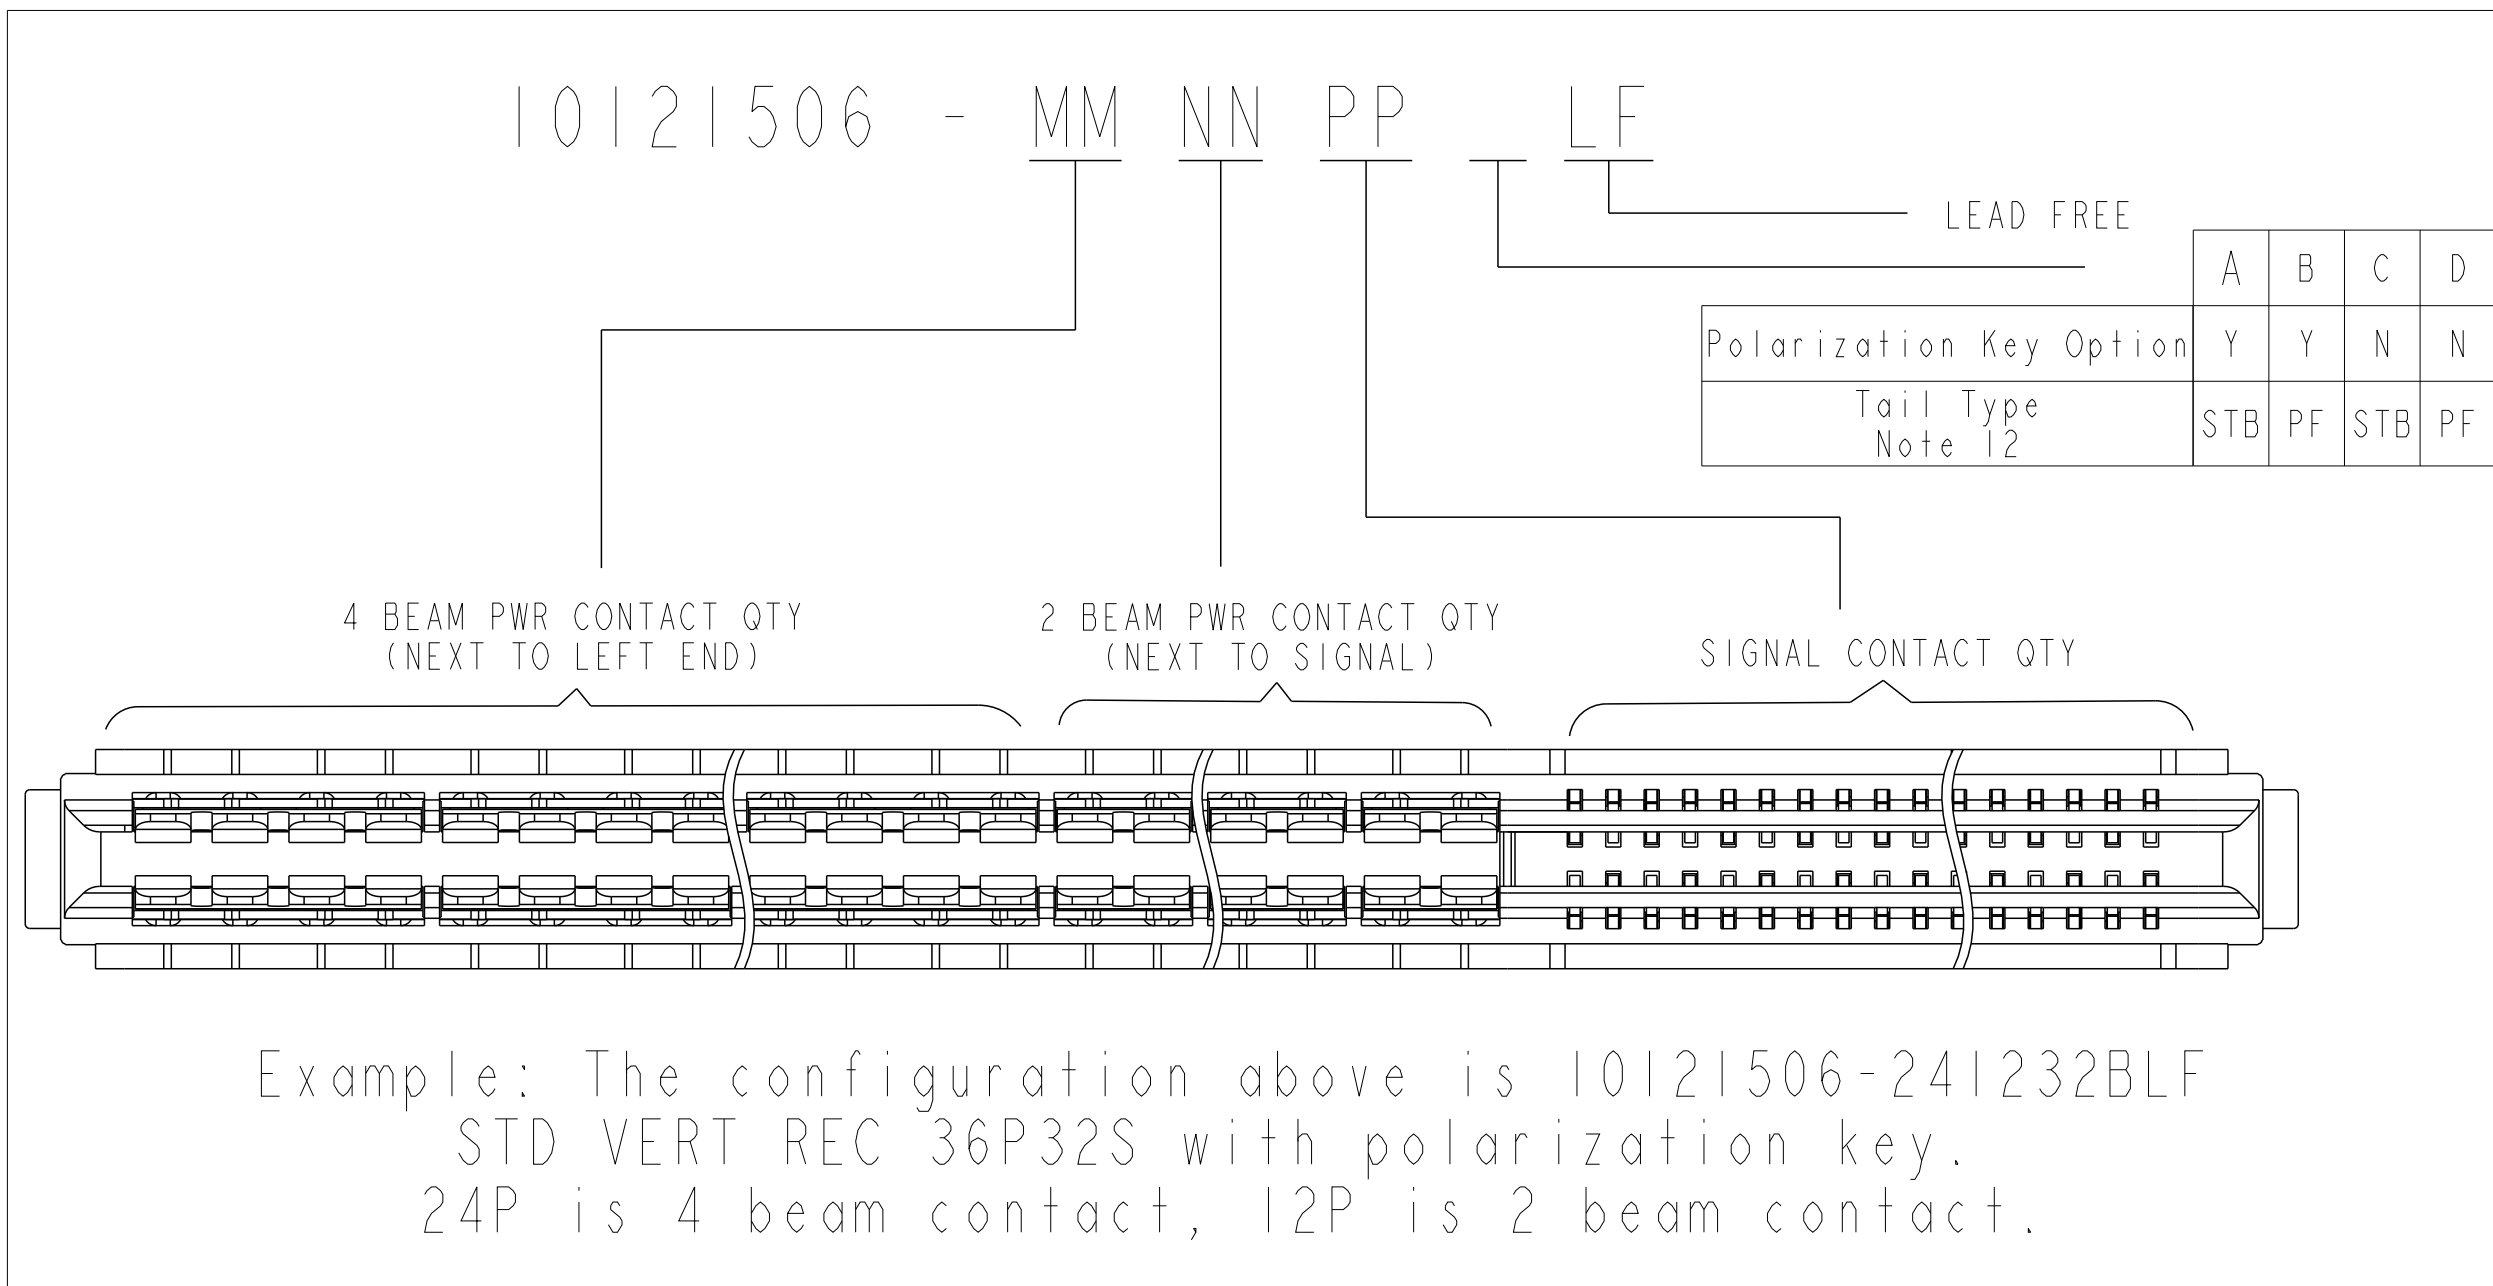

DIM	TABLE 2. LENGTH FORMULAS.
DIM A (13)	(MM/8)X10.16+ (NN/4)X5.08 + (PP/2)X1.27 + 9.12
DIM B	DIM "A" - 5.00
DIM C	DIM "A" - 2.34
DIM D	DIM "A" - 4.04
DIM E	DIM "A" - 5.30
DIM F (14)	(MM/8-1)X10.16 + (NN/4-1)X5.08 + 13.34 (WITH 4 BEAM CONTACT) A/B
	3.18 (WITHOUT 4 BEAM CONTACT)

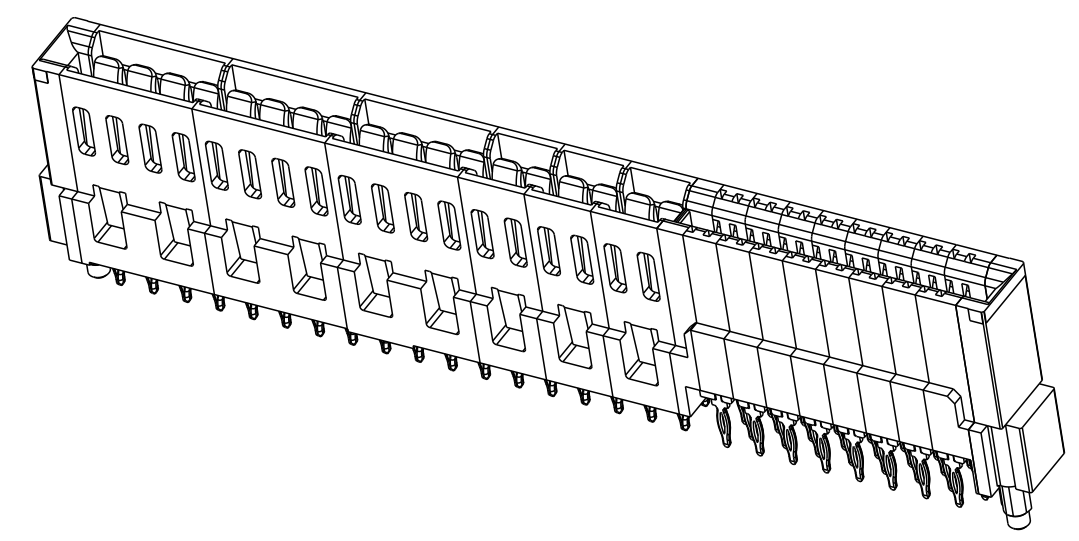

EXAMPLE: 10121506-241232BLF

TABLE 3. PART NUMBER CODE. HPCE STD VERT REC P+S CONFIG

NOTES:

1. CONNECTOR MATERIALS:
- HOUSING: HIGH TEMPERATURE THERMAL PLASTIC, BLACK
UL 94V-0 COMPLIANT
- CONTACTS: HIGH PERFORMANCE COPPER ALLOY.
2. CONTACT FINISH REF. GS-12-604 SECTION 5.2.
3. PRODUCT SPECIFICATION: GS-12-604.
4. APPLICATION SPECIFICATION: GS-20-128.
5. PRODUCT MARKING (FCI - PART NUMBER & DATE CODE) ON HOUSING IN AREA SHOWN.
6. PACKAGING MEETS FCI SPECIFICATION GS-14-937.
7. HOUSING COMPONENT WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 60 SECONDS IN A CONVECTION, INFRA-RED, OR VAPOR PHASE REFLOW OVEN.
8. COPPER PLATING THICKNESS IN CENTER OF VIA-HOLE CAN BE NO MORE THAN 0.003 LESS THAN OTHER AREAS.
9. ALL HOLE SIZES ARE FINISHED HOLE SIZES.
10. MOUNTING HOLES ARE UNPLATED
Ø 2.40 +/- 0.1 FOR PRESS-FIT TAILS
Ø 2.18 +/- 0.03 FOR SOLDER TAILS
11. PRESS FIT APPLICATION TOOL DRAWING : 10119453.
12. STB= SOLDER TO BOARD, 1.57-2.38mm PCB THICKNESS.
PF = PRESS FIT, 1.57mm MINIMUM PCB THICKNESS.
13. MAXIMUM OVERALL LENGTH IS 100mm.

14. DIM IS NOT APPLICABLE IF NO 4 BEAM CONTACT OR 2 BEAM CONTACT.
15. A/B SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

Copyright FCI.

dr	Wei-Long Zhang	2012/07/05	projection 	MM 	size	A2	scale	1:1	
eng	Wei-Long Zhang	2012/08/28			ecn no	ELX-DG-012696-1			
chr	-	-			rel level			Released	
appr	Pei-Ming Zheng	2012/08/28			product family				
	title	STD VERT REC UNIVERSAL			dwg no	10121506		rev	
		HIGH POWER CARD EDGE							
www.fci.com	cat. no.	Product - Customer Drw			sheet 4 of 4			B	