

PRODUCT NUMBER
 5 4 2 0 2 - X X X X X - X X X LF


PLATING
 S=15μ"[0.38μm]
 ON CONTACT AREA
 100μ"[2.5μm]TIN
 ON TAIL(NOTE 13)
 G=30μ"[0.76μm]
 ON CONTACT AREA
 100μ"[2.5μm]TIN
 ON TAIL(NOTE 13)
 T=100μ"[2.5μm]TIN
 ON CONTACT AREA
 AND ON TAIL(SEE NOTE 11)
 F=2μ"[0.05μm]GOLD
 ON CONTACT AREA
 AND ON TAIL

LEAD FREE OPTION NOTE 9 & 10
 POLARIZATION NOTE 6
 PACKAGING TYPE, NOTE 5
 POSITIONS PER ROW 02 TO 20

LEAD STYLE	POST
08	0.230/5.84
30	0.318/8.08

NOTES:

- HOUSING MAT'L: HIGH TEMPERATURE THERMOPLASTIC. FLAME RETARDANT PER UL 94V-0. COLOR: BLACK OR MINERAL FILLED LCP FLAME RETARDENT PER UL-94V-0. COLOR: BLACK. THESE PART NUMBERS WILL WITHSTAND EXPOSURE TO 260 C PEAK TEMPERATURE FOR 20 SECONDS IN WAVE SOLDER, INFRA-RED OR VAPOR PHASE SOLDER PROCESS.
- PIN MATERIAL: PHOSPHOR-BRONZE
- TO DETERMINE DIMENSIONS: N = NUMBER OF POSITIONS ROW. EXAMPLE: 10 POS., N x .100/2.54=1.00/25.4
- 2LBS/0.9KG MIN. PIN RETENTION IN EITHER DIRECTION.
- PACKAGING: _ =POLY BAGS WITHOUT PICKUP CAP. T =TUBES (OMIT DASH IF NOT POLARIZED). P =TUBES WITH PICKUP CAPS. A =TAPE AND REEL WITH PICKUP CAPS. C =CUSTOMIZED TAPE AND REEL WITH PICKUP CAPS.
- FOR POLARIZATION, SPECIFY POSITION NUMBER (i.e. A03=ROW A POS. 3) TO OMIT PIN. OMIT FROM PRODUCT NUMBER IF THIS FEATURE IS NOT APPLICABLE. PRODUCT MANAGEMENT APPROVAL REQUIRED PRIOR TO RELEASE OR SALE OF POLARIZED PRODUCTS.
- UNDERPLATING: 50μ"/1.2μm Ni.
- PIN TIPS ON Sn PLATED PRODUCT MAY HAVE BARE METAL ON TWO SIDES, BOTH ENDS.
- PART NUMBERS WITH "LF" SUFFIX AT THE END ARE LEAD FREE.
- THESE PRODUCTS MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- "THIS PRODUCT HAS 100% PURE TIN PLATING IN THE INTERFACE AND HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL INTERCONNECT ENVIRONMENTS."
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
- MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION


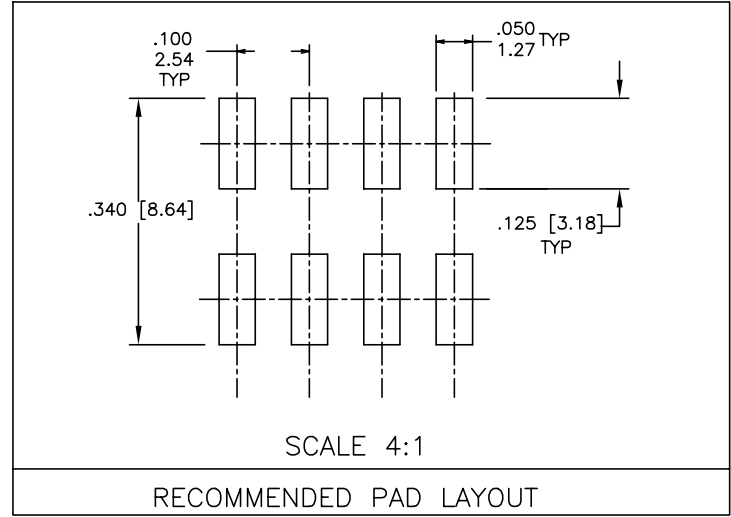


Copyright FCI.

www.fciconnect.com		surface 6.4 ISO 1302	tolerance std ISO 406 ISO 1101	projection A4	INCH/MM ↔
Dr	D.INGRAM	05/17/99	ANGULAR	size	Scale 1.000
Eng	H.SUNDY	07/21/99	LINEAR	0.X	±0.3
Chr	H.SUNDY	07/21/99	0° ±2°	0.XX	±0.15
Appr	H.SUNDY	07/21/99	Product family	0.XXX	±0.05
			Product family	BERGSTIK	Spec ref
title				54202	Rev. X
catalog no				CUSTOMER	sheet 1 of 3

rev	ecn no	dr	date
W	ELX-N-012227	J.Z	2012-07-15
X	ELX-N-14748	ZK	2013-05-14
S	M07-0361	MHT	8/14/07
T	M08-0208	MHT	7/18/08
U	M08-0279	MHT	9/30/08
V	N10-0438	ZJ	2010-12-28



PRODUCT NUMBER
SEE TABLE

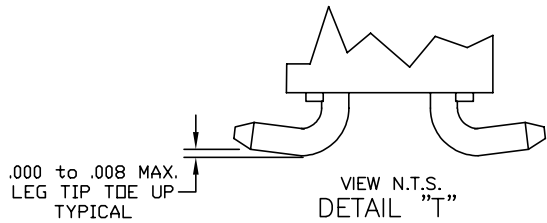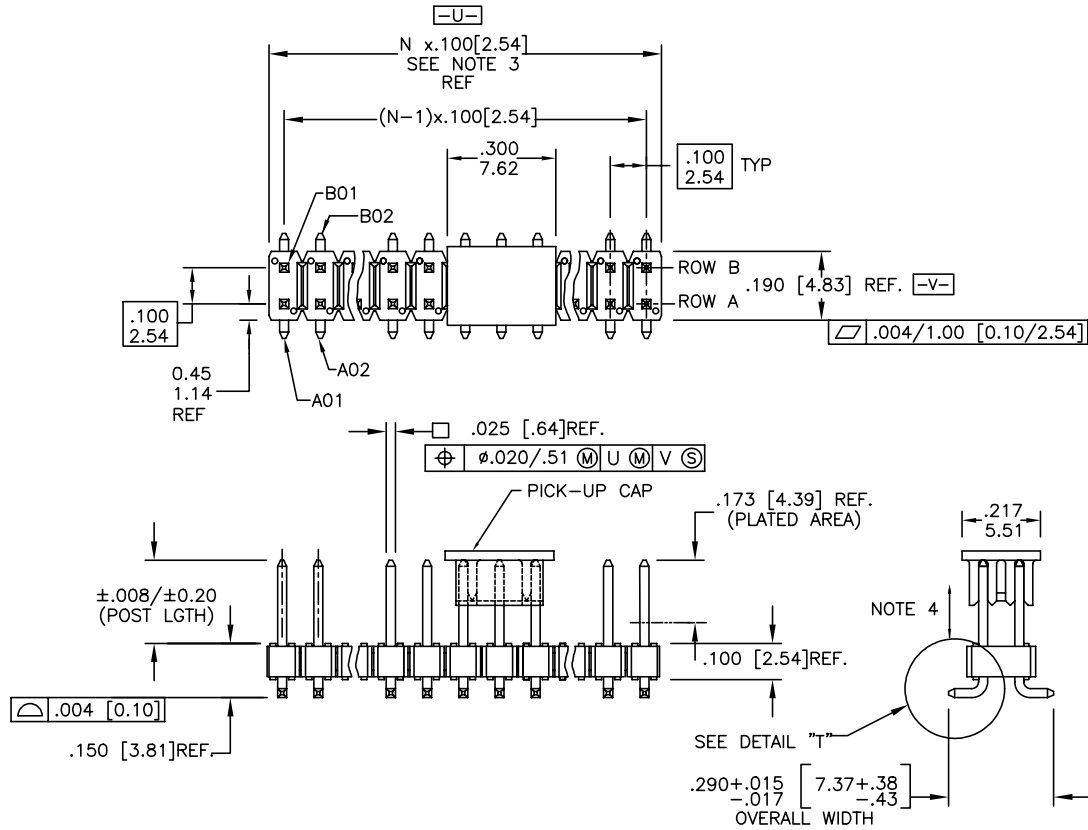

www.fciconnect.com			surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection A4	INCH/MM
			TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	D.INGRAM	05/17/99	ANGULAR	0.X	±0.3	size A4
Eng	H.SUNDY	07/21/99	LINEAR	0.XX	±0.15	Scale 1.000
Chr	H.SUNDY	07/21/99	0° ±2°	0.XXX	±0.05	ECN ELX-N-14748
Appr	H.SUNDY	07/21/99	Product family	BERGSTIK		Spec ref
FCI			title .100 UNSHROUDED HDR. DUAL ROW VERT. SMT.		dwg no 54202	Rev. X
			catalog no	CUSTOMER		sheet 2 of 3

TAPE AND REEL PACKAGING

SIZE	LEAD STYLE 08 POST (0.230 [5.84])	LEAD STYLE 30 POST (0.318 [8.08])
2X2	YES	YES
2X3	YES	
2X4	YES	YES
2X5	YES	
2X6	YES	
2X7	YES	YES
2X8	YES	
2X9		
2X10	YES	
2X11	YES	
2X12		YES
2X13	YES	
2X14		
2X15	YES	
2X16		YES
2X17	YES	
2X18		
2X19		
2X20		

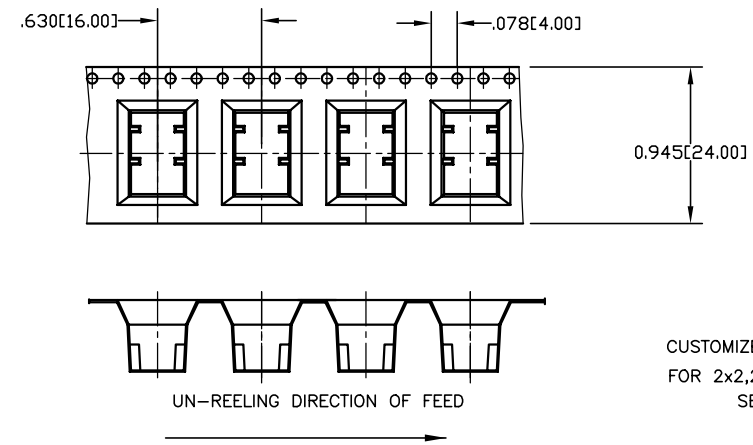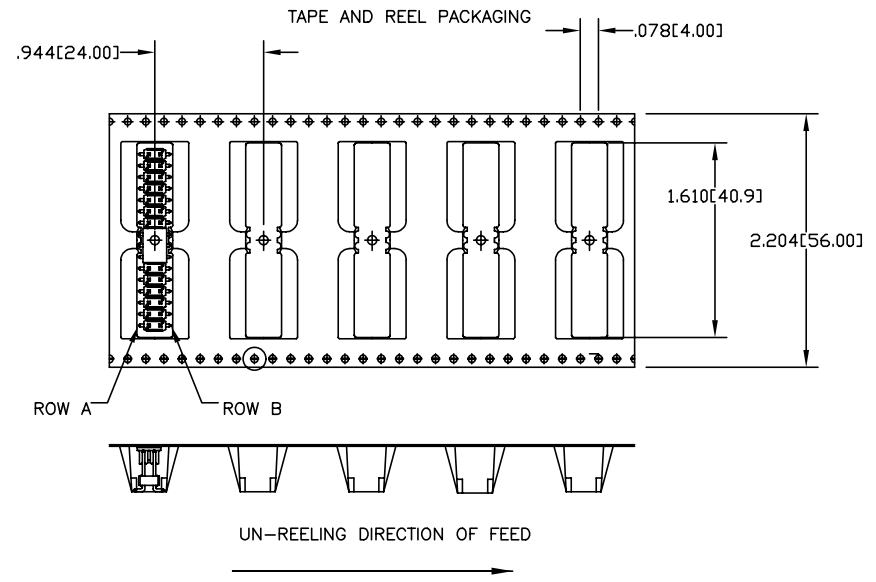

CUSTOMIZED CARRIER TAPE
FOR 2x2,2x3,2x4,2x5 SIZE.
SEE NOTE 5



Copyright FCI.

Cross Reference

CORE RANGE	EXTENDED RANGE
54202-X08XXLF	95278-X01-XXLF
54202-X30XXLF	95278-X02-XXLF

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection	INCH/MM
		TOLERANCES UNLESS OTHERWISE SPECIFIED			←→
Dr	D.INGRAM	05/17/99	ANGULAR	0.X ±0.3	size A4
Eng	H.SUNDY	07/21/99	LINEAR	0.XX ±0.15	Scale 1.000
Chr	H.SUNDY	07/21/99	0° ±2°	0.XXX ±0.05	ECN ELX-N-14748
Appr	H.SUNDY	07/21/99	Product family	BERGSTIK	Spec ref
	title	.100 UNSHROUDED HDR. DUAL ROW VERT. SMT.		dwg no	54202
	catalog no			CUSTOMER	sheet 3 of 3