

SPECIFICATIONS

Mechanical

Durability: 100 Cycles

Insertion/Extraction force: 40N Max./11.5N min

Physical

Cage: Copper Alloy


Operating Temperature: -55°C to + 85°C

SFP

3S Series,


SFP (Small Form-Factor Pluggable)

Cage, single port, solder type.

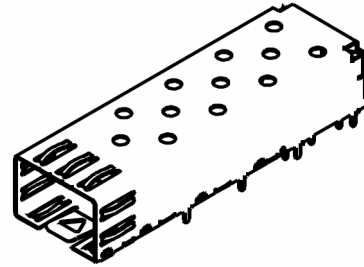

3DVIEW

DRAWING

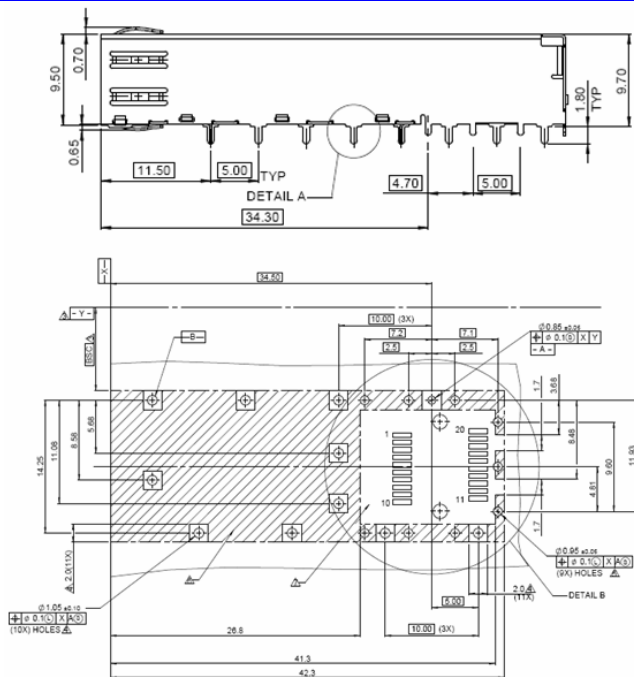

ORDERING INFORMATION

PART LIST

3S000000-3 L B - * F

3: STANDARD TYPE

L:SOLED TYPE

B:SHORT PIN-

LEAD FREE CODE
F: LEAD FREE
NONE:TIN/LEAD

-PACKING TYPE

4:TRAY

7:TAPE AND REEL