SPECIFICATIONS


Mechanical
Durability: 100 Cycles
Insertion/Extraction force: 50N Max./6N min

Electrical
Voltage Rating: 120 volts r,m,s
Current Rating: 0.5A
Insulation Resistance: 1000 M-ohms max


Physical
Cage: Copper Alloy
Housing: LCP
Light pipe: PC
Contact: Copper Alloy
I/M plastic part: LCP
Plating: 30u" on mating area
Operating Temperature: -55℃ to + 85℃


SFP

3S Series,
SFP stacked type, 2x6, 0.8mm pitch with inner light pipe.

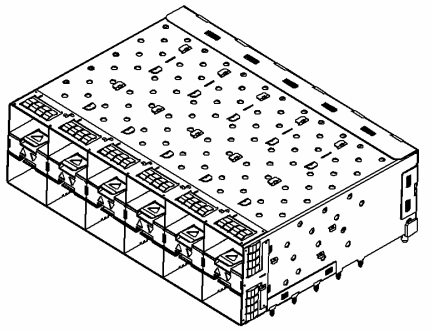

DRAWING

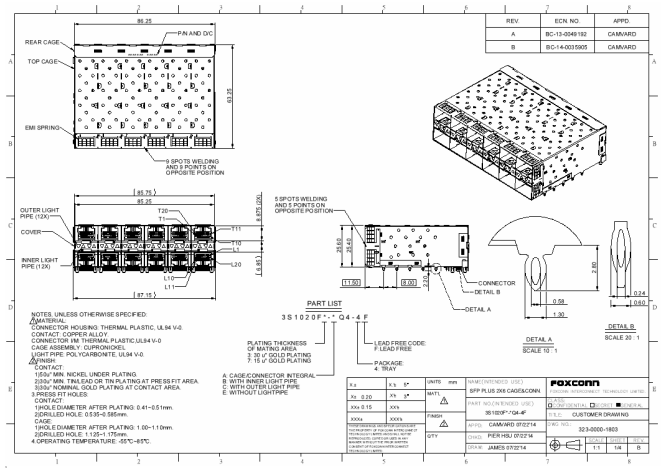

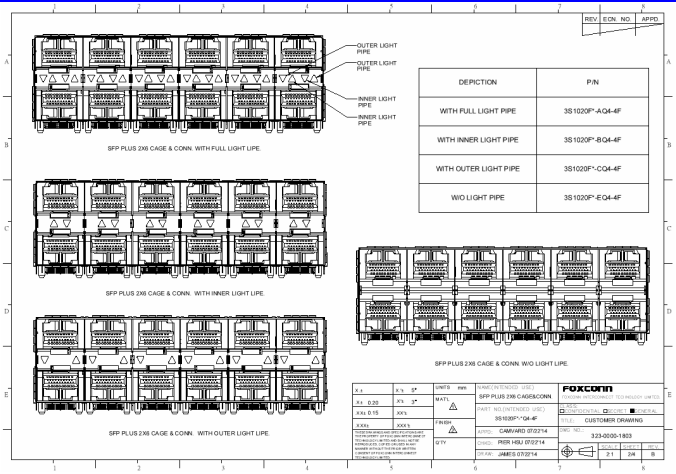

ORDERING INFORMATION

PART LIST

3 S 1 0 2 0 F * - * Q 4 - 4 F

PLATING THICKNESS OF MATING AREA
3: 30 u" GOLD PLATING
7: 15 u" GOLD PLATING

A: CAGE/CONNECTOR INTEGRAL
B: WITH INNER LIGHT PIPE
C: WITH OUTER LIGHT PIPE
E: WITHOUT LIGHTPIPE

LEAD FREE CODE:
F:LEAD FREE

PACKAGE:
4: TRAY

All specification & dimensions are subject to change, please call your nearest Foxconn sales representative for update information.