

SPECIFICATIONS

Mechanical

Durability: 100 Cycles

Insertion/Extraction force: 60N Max./30N MAX

Electrical

Voltage Rating: 30 vdc per contact

Current Rating: 0.5A

Insulation Resistance: 1000 M-ohms MIN

Physical

Cage: N/A

Housing: LCP

Light pipe: N/A

Contact: Copper Alloy


I/M plastic part: LCP

Plating: GOLD PLATING OVER 100u"MIN NICKEL


Operating Temperature: -20°C to + 85°C

QSFP

3S Series,
QSFP PLUS 25G CONN

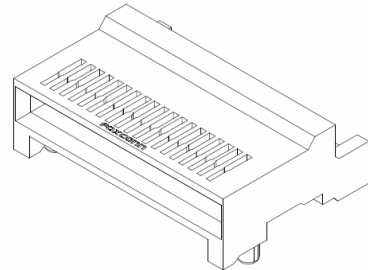

DRAWING

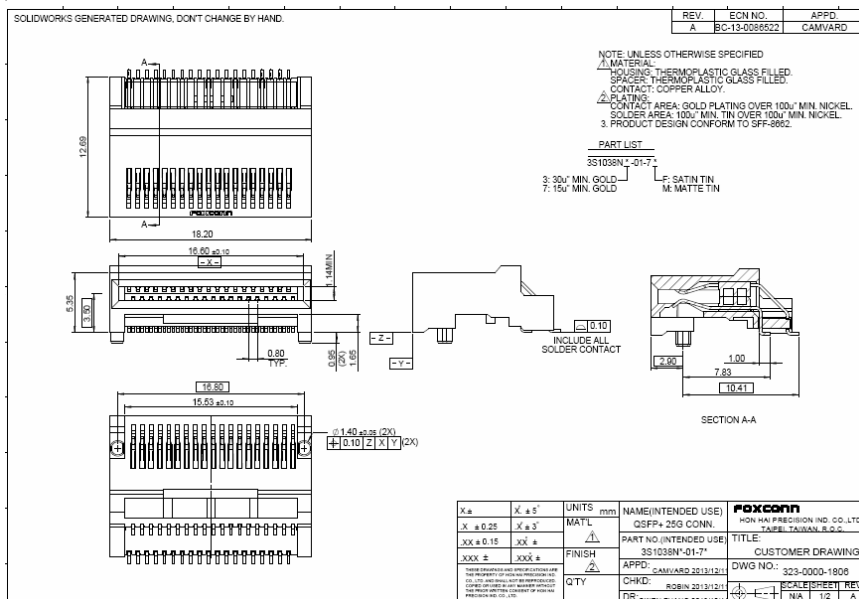

ORDERING INFORMATION

PART LIST

3S1038N[±]-01-7[±]

3: 30u" MIN. GOLD
7: 15u" MIN. GOLD

F: SATIN TIN
M: MATTE TIN