

SPECIFICATIONS

Mechanical

Durability: 50 Cycles

Insertion/Extraction force: 40N Max./11.5N Max

Electrical

Voltage Rating: 30V

Current Rating: 0.5A

Dielectric Withstanding Voltage: 300V

Insulation Resistance: 1000M Ω min

Physical

Housing: LCP, UL 94-0, Black

Contact: Phosphor Bronze

Plating: 30 μ 'Gold Plating


Operating Temperature: -45 $^{\circ}$ C to + 85 $^{\circ}$ C

3S Series, 3S103023-H1M-7F

XFP 1X1 CONN



DRAWING

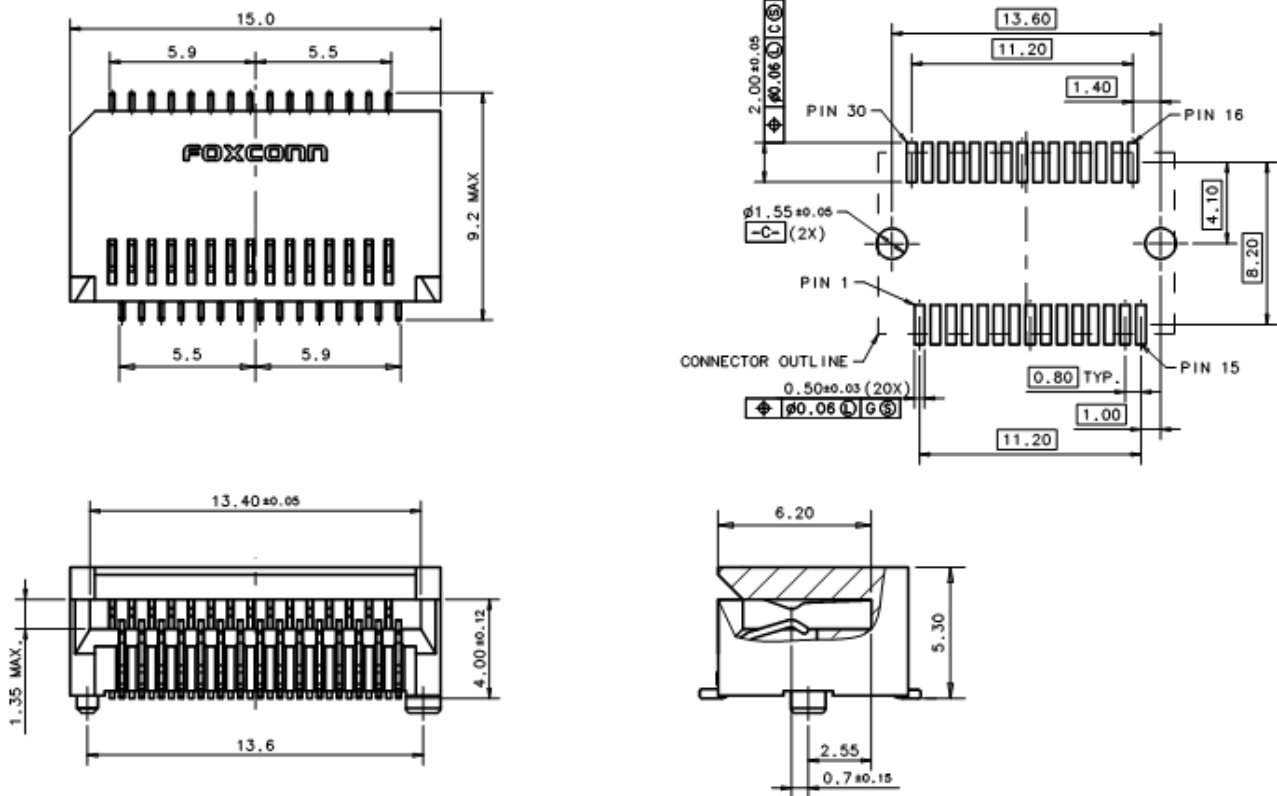

PART NO:

PART LIST:

3S10302*-H1*-*

CONTACT PLATING
3: 30 μ " GOLD
7: 15 μ " GOLD

H: SPECIAL TYPE
FOR H3C

LEAD FREE CODE
F: LEAD FREE
ROHS LEVEL 6 COMPLIANCE
NONE: TIN/LEAD,
ROHS LEVEL 5 COMPLIANCE

PACKAGE CODE
7: TAPE AND REEL

MODIFY CODE
1: NEW STANDAND TYPE(SATIN TIN)
M: MATTE TIN PLATING ON SOLDER AREA